

GULF SOUTH SUPPLY INC.
7721 AIRLINE DR.
HOUSTON, TEXAS 77037


GSS-45

PHONE 281-445-8077

FAX 281-445-8557

VERTICAL MULTI-STAGE BOOSTER PUMPS

BERKELEY

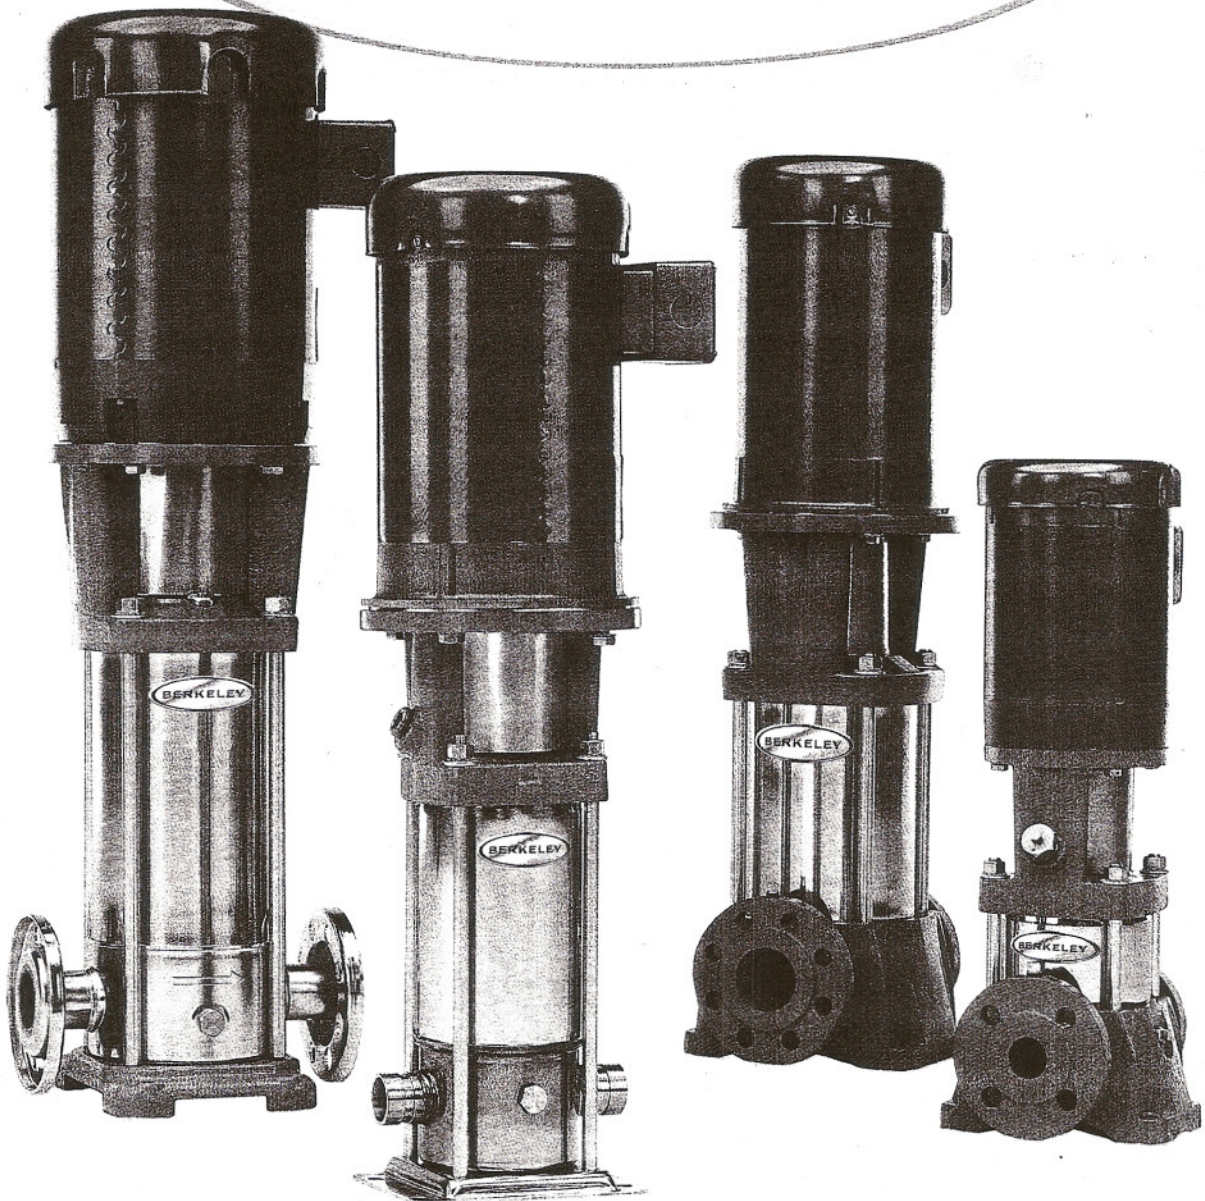

Berkeley Vertical Multi-stage Pumps deliver outstanding reliability and performance in the most demanding operating environments. A variety of construction materials are available to maximize process dependability, versatility and performance.


BVM – AISI 304 Stainless Steel construction with a heavy-duty cast iron base and motor bracket, designed for pumping water and non-corrosive liquids.

BVMI – All AISI 304 Stainless Steel wetted parts, suitable for moderately corrosive or low Ph liquids.


BVMX – All AISI 316 Stainless Steel wetted parts, suitable for aggressive industrial liquids.

For any high-pressure application where more versatile and dependable performance is needed, count on a Berkeley Vertical Multi-stage Pump.

- Four (4) flow series, BVM (I/X) 2, 4, 8, 16
 - NPT, victaulic, and flanged connections
 - Multiple mechanical seal and pump elastomer options
 - Continuous-duty, high efficiency designs
 - Heavy-duty cast motor bracket insures proper motor alignment
 - High-thrust ODP and TEFC motor options
-
- Versatility in performance and design
 - Retrofits easily in existing and new installations, reducing valuable downtime
 - Lower operating costs



Page 103

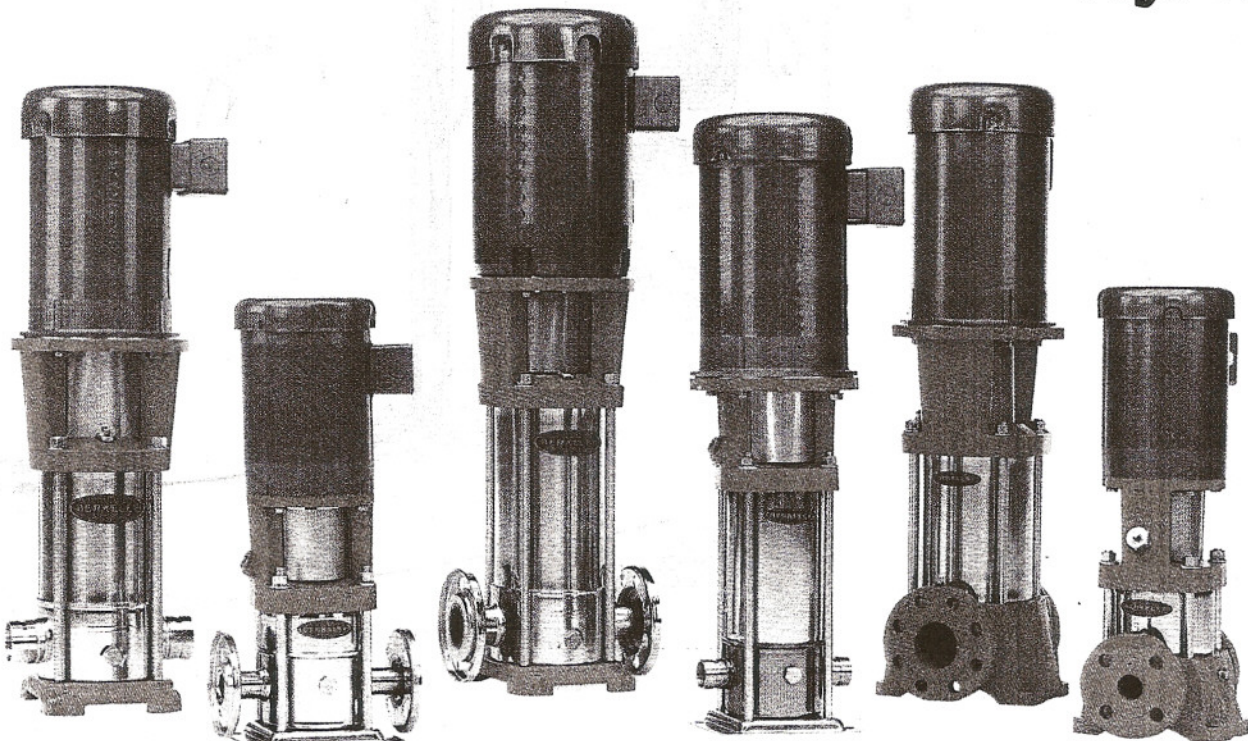


GULF SOUTH SUPPLY INC.
7721 AIRLINE DR.
HOUSTON, TEXAS 77037

GSS-45

PHONE 281-445-8077


FAX 281-445-8557

VERTICAL
MULTI-STAGE
BOOSTER
PUMPS

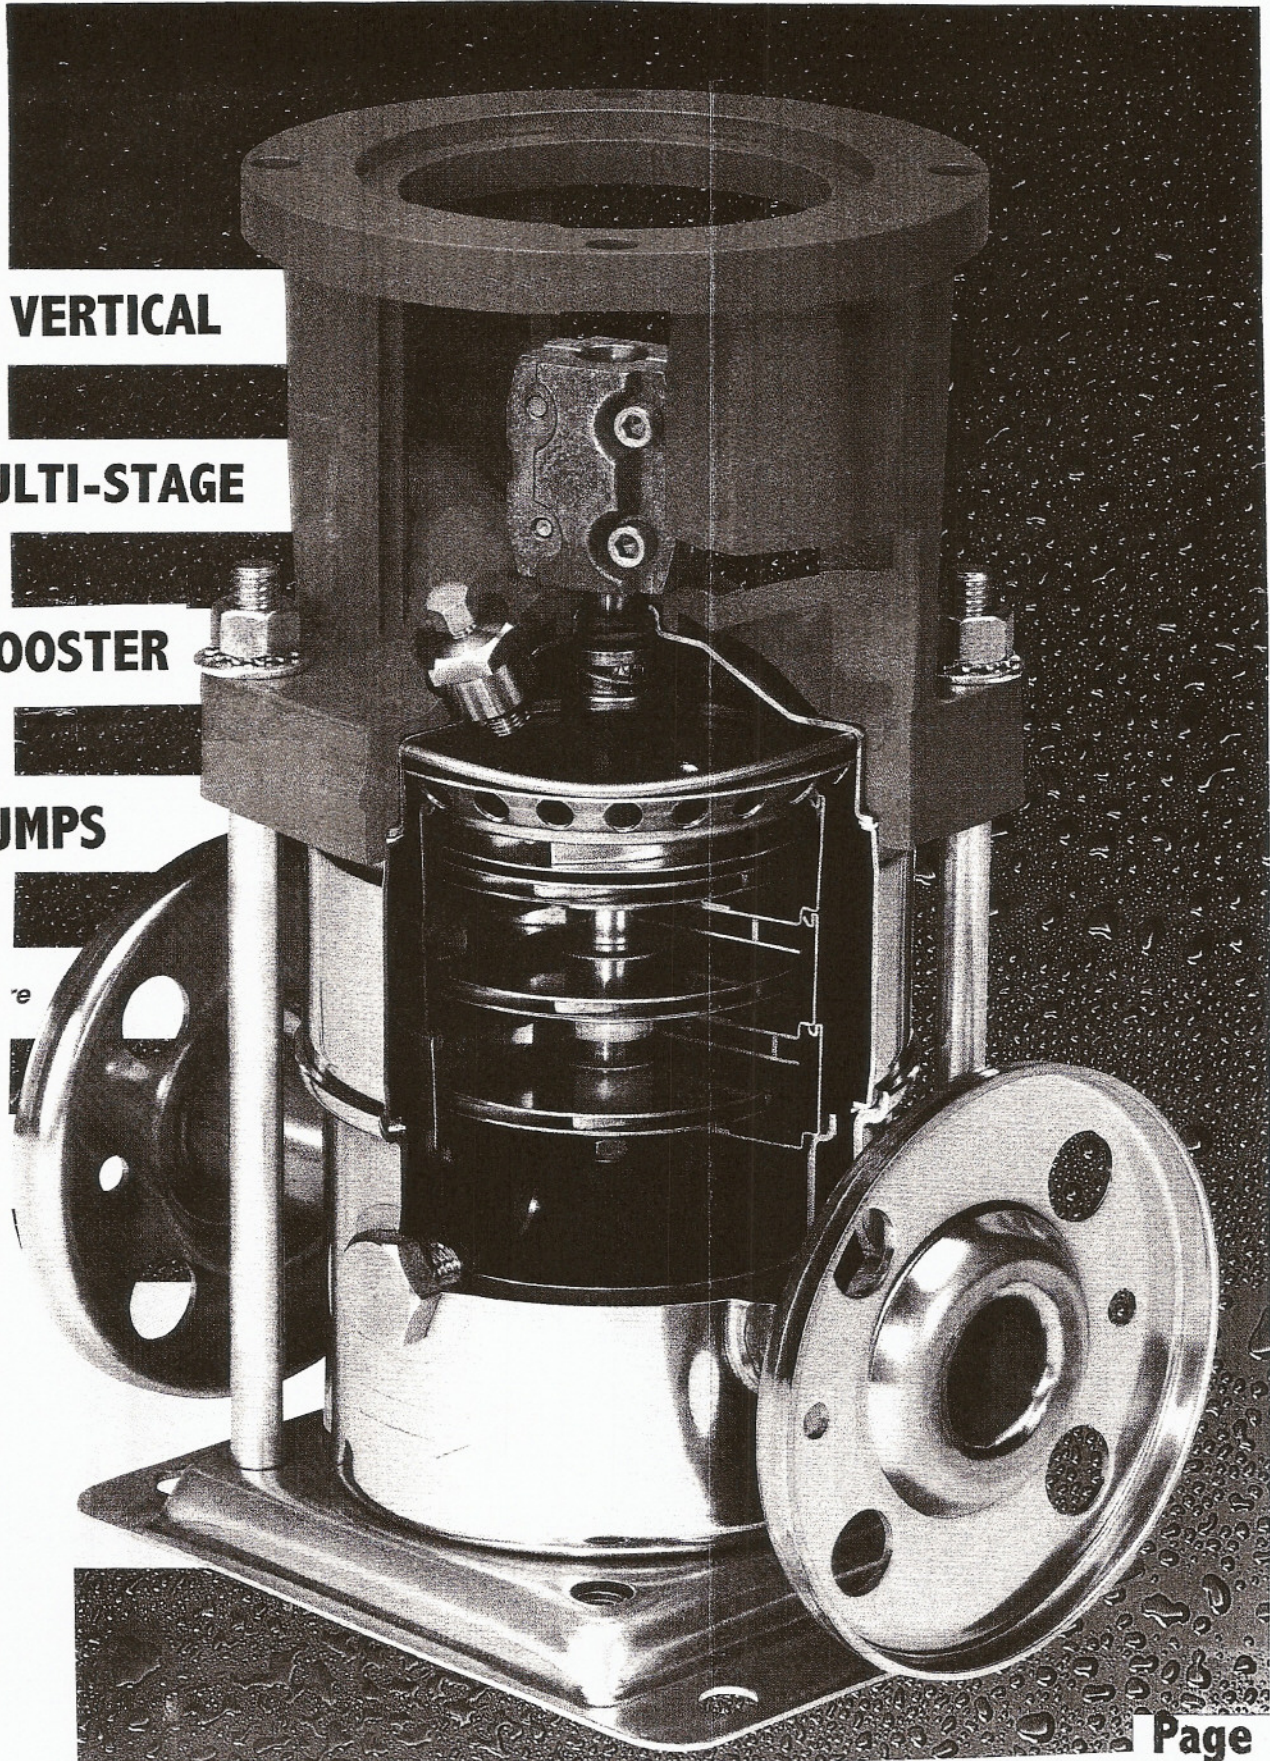

VERTICAL MULTI-STAGE BOOSTER PUMPS

CAST IRON OR STAINLESS STEEL PUMPS

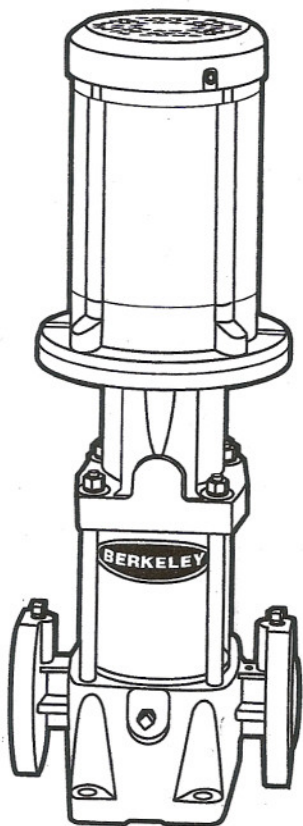

- TYPICAL PRESSURE BOOSTING APPLICATIONS
- COMMERCIAL PRESSURE BOOSTING
- REVERSE OSMOSIS SYSTEMS
- JOCKEY PUMPS FOR FIRE PROTECTION
- BOILER FEED, CONDENSATE, DE-AERATION
- MUNICIPAL WATER SUPPLY
- CAR WASH SYSTEMS
- AGRICULTURAL & COMMERCIAL IRRIGATION
- INDUSTRIAL PARTS WASHERS
- PRESSURE SPRAY & WASH-DOWN SYSTEMS
- PULP, PAPER, LUMBER & MINING
- PETROCHEMICAL: REFINERY & OFFSHORE


HORSEPOWER = UNITS ARE AVAILABLE THROUGH 40 HP.
CAPACITY = UNITS ARE AVAILABLE THROUGH 200 GPM.

GULF SOUTH SUPPLY INC.
7721 AIRLINE DR.
HOUSTON, TEXAS 77037

GSS-45

PHONE 281-445-8077

FAX 281-445-8557

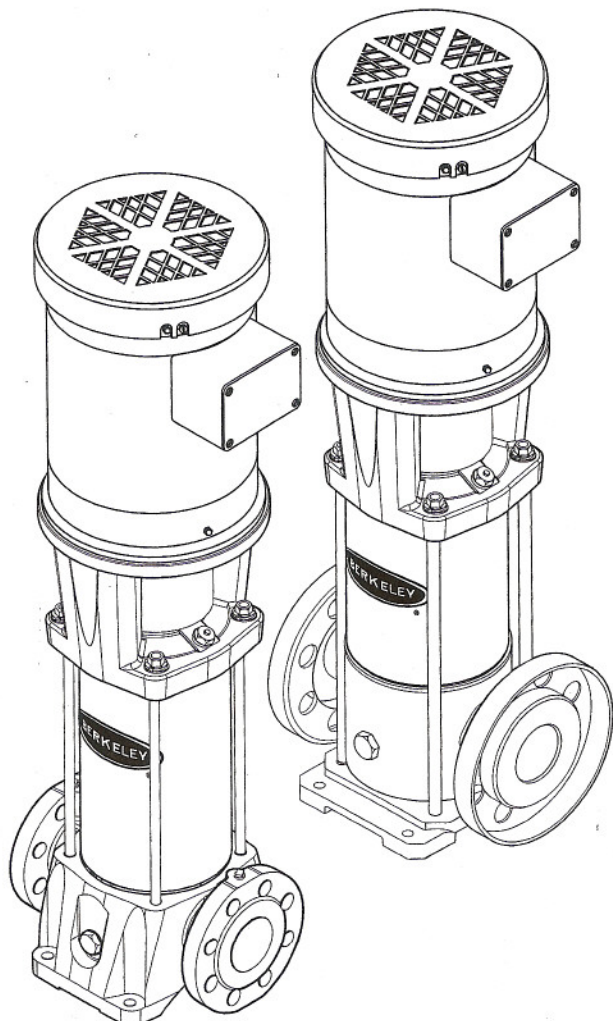

Vertical Multistage Pumps

BVM - Cast Iron


BVMI - 304 Stainless Steel

BVMX - 316 Stainless Steel

Models	Flow Series	HP Range	GPM
BVM/BVMI/BVMX	2	1/2 - 5	1.2 - 20
BVM/BVMI/BVMX	4	1/2 - 7.5	3 - 40
BVM/BVMI/BVMX	8	3/4 - 15	5.3 - 65
BVM/BVMI/BVMX	16	5 - 25	8.5 - 115





VERTICAL MULTI-STAGE PERFORMANCE

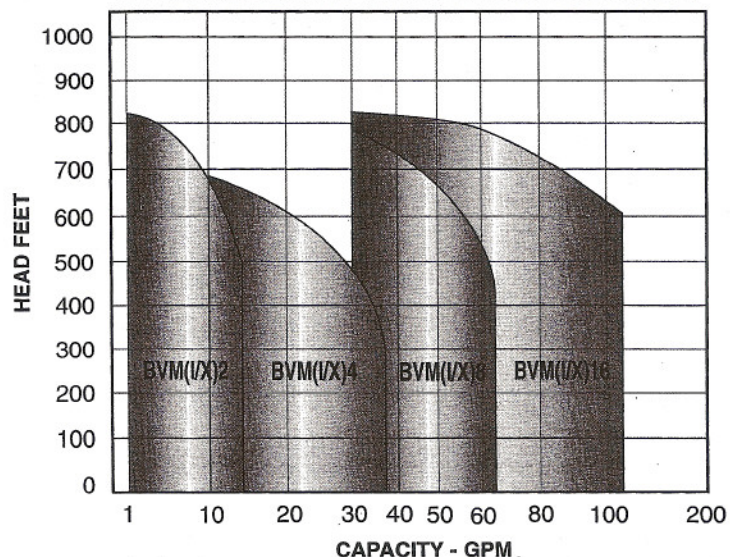


BVM (I/X) 2 SERIES

VERTICAL MULTI-STAGE PUMPS

Performance Curves – BVM (I/X) 2 Series

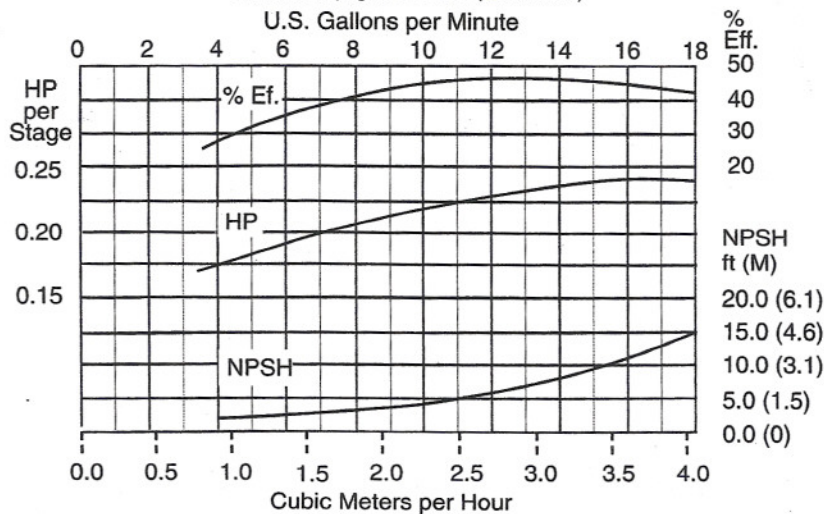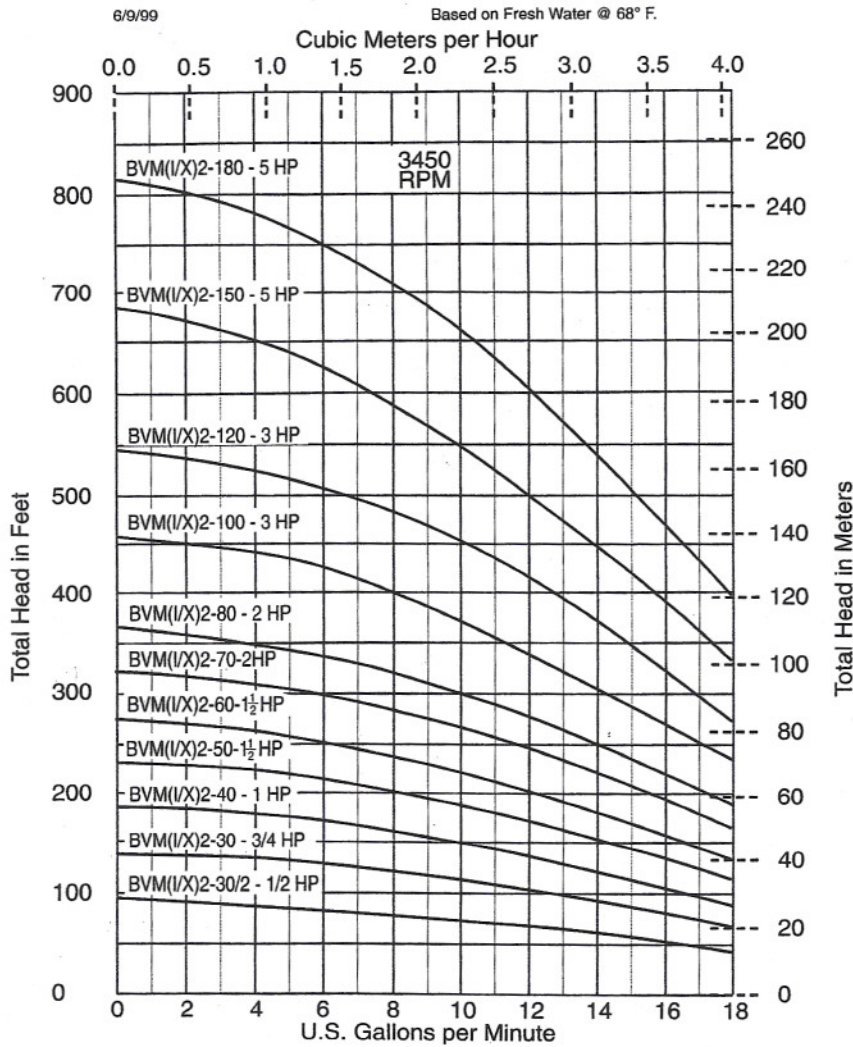

Permissible Operating Pressure Curves

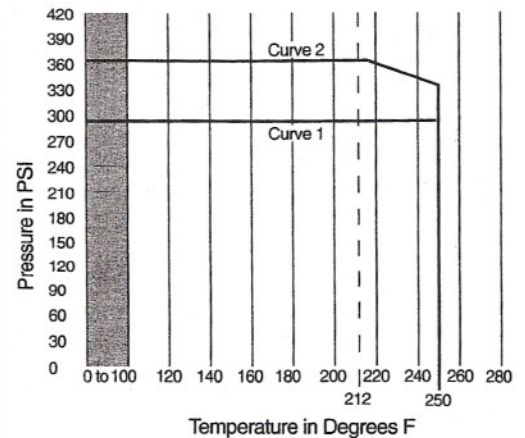

CURVE 1: BVM (I/X) 2-30/2 to
BVM (I/X) 2-120



CURVE 2: BVM (I/X) 2-150 to
BVM (I/X) 2-180

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

BVM2 SERIES

Cast Iron Construction

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

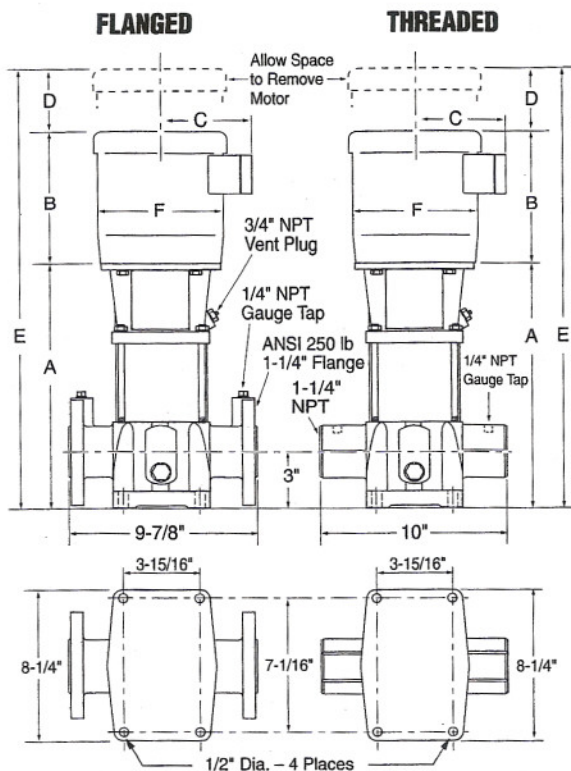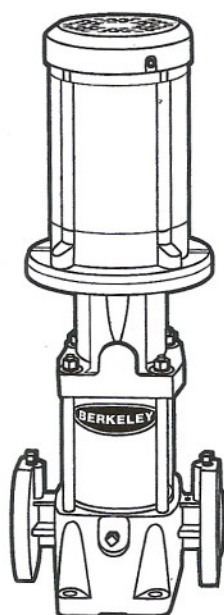

Technical Information

MINIMUM PUMPING RATES: 1 GPM

FLOW RANGE: 1.2 – 20 GPM

MINIMUM SUCTION PIPE SIZES:
1-1/4" Nominal Diameter, Schedule 40 Pipe

MAXIMUM INLET PRESSURE:
30/2 - 60 – 145 PSI
70 - 80 – 220 PSI


MAXIMUM AMBIENT TEMPERATURE: 104° F

LIQUID TEMPERATURE RANGE: +5° F to +250° F

MOTOR OPTIONS: TEFC or ODP

CONSTRUCTION MATERIALS: See Page 8.

1-1/4" ANSI. 250 lb. 4-Bolt Flange

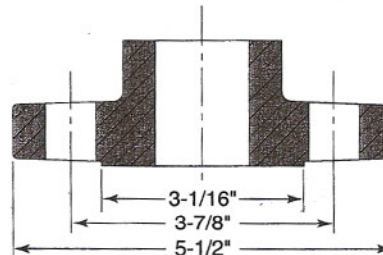

Dimensions and Specifications – BVM 2 Series



Model Number	HP	Motor S.F.	Ph	Volts	Frame Size	Disc. Size	Suc. Size	Dimension in Inches*						TEFC Wt.	ODP Wt.
								A	B	C	D	E	F		
BVM2-30/2	0.5	1.25	1	115/208-230	56C	1-1/4	1-1/4	11-3/8	9-1/4	4-7/8	2	22-5/8	6	77	63
BVM2-30/2	0.5	1.25	3	208-230/460	56C	1-1/4	1-1/4	11-3/8	9-1/4	4-7/8	2	22-5/8	6	70	62
BVM2-30	0.75	1.25	1	115/208-230	56C	1-1/4	1-1/4	11-3/8	9-7/8	4-7/8	2	23-1/4	6	83	67
BVM2-30	0.75	1.25	3	208-230/460	56C	1-1/4	1-1/4	11-3/8	9-1/4	4-7/8	2	22-5/8	6	75	64
BVM2-40	1	1.25	1	115/208-230	56C	1-1/4	1-1/4	12	11-1/8	5-1/4	2	25-1/4	7-1/8	87	79
BVM2-40	1	1.25	3	115/208-230	56C	1-1/4	1-1/4	12	9-1/4	4-7/8	2	23-3/8	6	78	66
BVM2-50	1.5	1.15	1	115/208-230	56C	1-1/4	1-1/4	12-3/4	11-1/8	5-5/8	2	26	7-1/8	93	88
BVM2-50	1.5	1.15	3	208-230/460	56C	1-1/4	1-1/4	12-3/4	10-1/8	5-3/4	2-1/8	25	7-1/4	89	82
BVM2-60	1.5	1.15	1	115/208-230	56C	1-1/4	1-1/4	13-1/2	11-1/8	5-5/8	2	26-5/8	7-1/8	93	90
BVM2-60	1.5	1.15	3	208-230/460	56C	1-1/4	1-1/4	13-1/2	10-1/8	5-3/4	2-1/8	25-3/4	7-1/4	88	84
BVM2-70	2	1.15	1	115/208-230	56C	1-1/4	1-1/4	14-1/8	12-1/8	5-5/8	2	28-1/4	7-1/8	108	92
BVM2-70	2	1.15	3	208-230/460	56C	1-1/4	1-1/4	14-1/8	11-1/8	5-3/4	2-1/8	27-3/8	7-1/4	98	88
BVM2-80	2	1.15	1	115/208-230	56C	1-1/4	1-1/4	14-7/8	12-1/8	5-5/8	2	29	7-1/8	103	93
BVM2-80	2	1.15	3	208-230/460	56C	1-1/4	1-1/4	14-7/8	11-1/8	5-3/4	2-1/8	28-1/8	7-1/4	99	89
BVM2-100	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	16-5/8	13-5/8	6-7/8	2-3/4	33-1/8	8-1/2	152	129
BVM2-100	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	16-5/8	12-1/4	6-7/8	2-7/8	31-7/8	8-1/2	123	98
BVM2-120	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	18-1/8	13-5/8	6-7/8	2-3/4	34-1/2	8-1/2	142	132
BVM2-120	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	18-1/8	12-1/4	6-7/8	2-7/8	33-1/4	8-1/2	123	101
BVM2-150	5	1.15	1	208-230	213TC	1-1/4	1-1/4	20-1/4	15-1/4	8	3-3/8	38-7/8	10-5/8	167	167
BVM2-150	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	20-1/4	13-5/8	6-7/8	2-7/8	36-3/4	8-1/2	157	136
BVM2-180	5	1.15	1	208-230	213TC	1-1/4	1-1/4	22-3/8	15-1/4	8	3-3/8	41	10-5/8	172	190
BVM2-180	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	22-3/8	13-5/8	6-7/8	2-7/8	38-7/8	8-1/2	172	150

* Measurements represent the largest number possible for each Model.

BVM (I/X) 2 SERIES

304 SS and 316 SS Construction

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

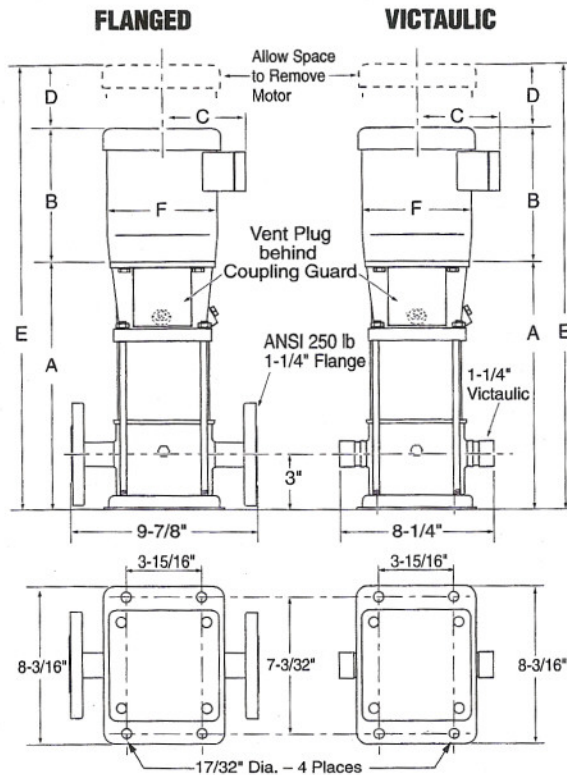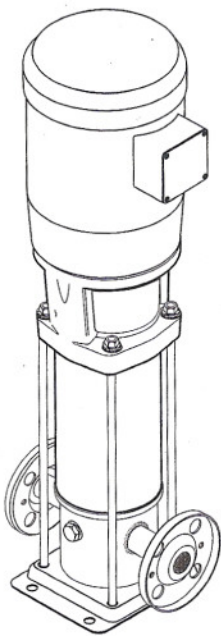

Technical Information

MINIMUM PUMPING RATES: 1 GPM

FLOW RANGE: 1.2 - 20 GPM

MINIMUM SUCTION PIPE SIZES:

1-1/4" Nominal Diameter, Schedule 40 Pipe

MAXIMUM INLET PRESSURE:

30/2 - 60 - 145 PSI


70 - 80 - 220 PSI

MAXIMUM AMBIENT TEMPERATURE: 104° F

LIQUID TEMPERATURE RANGE: +5° F to +250° F

MOTOR OPTIONS: TEFC or ODP

CONSTRUCTION MATERIALS: See Page 8.

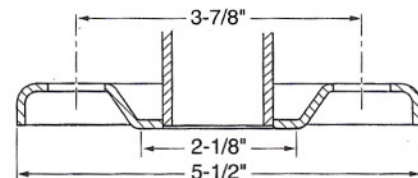

Dimensions and Specifications – BVM (I/X) 2 Series†

Model Number†	HP	Motor S.F.	Ph	Volts	Frame Size	Disc. Size	Suc. Size	Dimension in Inches*						TEFC Wt.	ODP Wt.
								A	B	C	D	E	F		
BVM(I/X)2-30/2	0.5	1.25	1	115/208-230	56C	1-1/4	1-1/4	11-3/4	9-1/4	4-7/8	2	23	6	77	63
BVM(I/X)2-30/2	0.5	1.25	3	208-230/460	56C	1-1/4	1-1/4	11-3/4	9-1/4	4-7/8	2	23	6	70	62
BVM(I/X)2-30	0.75	1.25	1	115/208-230	56C	1-1/4	1-1/4	11-3/4	9-7/8	4-7/8	2	23-5/8	6	83	67
BVM(I/X)2-30	0.75	1.25	3	208-230/460	56C	1-1/4	1-1/4	11-3/4	9-7/8	4-7/8	2	23-5/8	6	75	64
BVM(I/X)2-40	1	1.25	1	115/208-230	56C	1-1/4	1-1/4	12-3/8	11-1/8	5-1/4	2	25-5/8	7-1/8	87	79
BVM(I/X)2-40	1	1.25	3	115/208-230	56C	1-1/4	1-1/4	12-3/8	11-1/8	5-1/4	2	25-5/8	7-1/8	78	66
BVM(I/X)2-50	1.5	1.15	1	115/208-230	56C	1-1/4	1-1/4	13-1/8	11-1/8	5-3/4	2-1/8	26-3/8	7-1/4	93	88
BVM(I/X)2-50	1.5	1.15	3	208-230/460	56C	1-1/4	1-1/4	13-1/8	11-1/8	5-3/4	2-1/8	26-3/8	7-1/4	89	82
BVM(I/X)2-60	1.5	1.15	1	115/208-230	56C	1-1/4	1-1/4	13-7/8	11-1/8	5-3/4	2-1/8	27	7-1/7	93	90
BVM(I/X)2-60	1.5	1.15	3	208-230/460	56C	1-1/4	1-1/4	13-7/8	11-1/8	5-3/4	2-1/8	27	7-1/4	88	84
BVM(I/X)2-70	2	1.15	1	115/208-230	56C	1-1/4	1-1/4	14-1/2	12-1/8	5-3/4	2-1/8	28-5/8	7-1/4	108	92
BVM(I/X)2-70	2	1.15	3	208-230/460	56C	1-1/4	1-1/4	14-1/2	12-1/8	5-3/4	2-1/8	28-5/8	7-1/4	98	88
BVM(I/X)2-80	2	1.15	1	115/208-230	56C	1-1/4	1-1/4	15-1/4	12-1/8	5-3/4	2-1/8	29-3/8	7-1/4	103	93
BVM(I/X)2-80	2	1.15	3	208-230/460	56C	1-1/4	1-1/4	15-1/4	12-1/8	5-3/4	2-1/8	29-3/8	7-1/4	99	89
BVM(I/X)2-100	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	17	13-5/8	2-5/8	2-7/8	33-5/8	8-1/2	152	129
BVM(I/X)2-100	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	17	13-5/8	2-5/8	2-7/8	33-5/8	8-1/2	123	98
BVM(I/X)2-120	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	18-1/2	13-5/8	6-7/8	2-7/8	35	8-1/2	142	132
BVM(I/X)2-120	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	18-1/2	13-5/8	6-7/8	2-7/8	35	8-1/2	123	101
BVM(I/X)2-150	5	1.15	1	208-230	213TC	1-1/4	1-1/4	20-5/8	15-1/4	8	3-3/8	39-1/4	10-5/8	167	167
BVM(I/X)2-150	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	20-5/8	15-1/4	8	3-3/8	39-1/4	10-5/8	157	136
BVM(I/X)2-180	5	1.15	1	208-230	213TC	1-1/4	1-1/4	22-3/4	15-1/4	8	3-3/8	41-3/8	10-5/8	172	190
BVM(I/X)2-180	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	22-3/4	15-1/4	8	3-3/8	41-3/8	10-5/8	172	150

* Measurements represent the largest number possible for each Model.

† Includes BMVI models constructed of 304 Stainless Steel and BVMX models constructed of 316 Stainless Steel.

BVM2 SERIES

VERTICAL MULTI-STAGE PUMPS

BVM2 SERIES VERTICAL MULTI-STAGE PUMPS
ALL UNITS LISTED BELOW ARE CAST IRON VERSION
ALL UNITS LISTED BELOW ARE FLANGED SUCTION & DISCHARGE
ALL UNITS LISTED BELOW HAVE TEFC MOTORS

<u>ASSEMBLY #</u>	<u>MODEL #</u>	<u>H.P.</u>	<u>PHASE</u>	<u>STAGES</u>
BVM2-30/2----	B77584-----	1/2-----	1-----	2-----
BVM2-30/2----	B77876-----	1/2-----	3-----	2-----
BVM2-30-----	B77855-----	3/4-----	1-----	3-----
BVM2-30-----	B77877-----	3/4-----	3-----	3-----
BVM2-40-----	B77856-----	1-----	1-----	4-----
BVM2-40-----	B77878-----	1-----	3-----	4-----
BVM2-50-----	B77857-----	1-1/2-----	1-----	5-----
BVM2-50-----	B77879-----	1-1/2-----	3-----	5-----
BVM2-60-----	B77858-----	1-1/2-----	1-----	6-----
BVM2-60-----	B77880-----	1-1/2-----	3-----	6-----
BVM2-70-----	B77859-----	2-----	1-----	7-----
BVM2-70-----	B77881-----	2-----	3-----	7-----
BVM2-80-----	B77860-----	2-----	1-----	8-----
BVM2-80-----	B77882-----	2-----	3-----	8-----
BVM2-100-----	B77861-----	3-----	1-----	10-----
BVM2-100-----	B77883-----	3-----	3-----	10-----
BVM2-120-----	B77862-----	3-----	1-----	12-----
BVM2-120-----	B77884-----	3-----	3-----	12-----
BVM2-150-----	B77863-----	5-----	1-----	15-----
BVM2-150-----	B77885-----	5-----	3-----	15-----
BVM2-180-----	B78029-----	5-----	1-----	18-----
BVM2-180-----	B78030-----	5-----	3-----	18-----

SUCTION and DISCHARGE
1 1/4 INCH---ANSI. 250 LB.
4 - BOLT FLANGE

OPTIONS AVAILABLE



1. 304 STAINLESS STEEL WET END CONSTRUCTION
2. 316 STAINLESS STEEL WET END CONSTRUCTION

ORDER SPECIAL FLANGES SEPARATELY


BVM (I/X) 4 SERIES

VERTICAL MULTI-STAGE PUMPS

Performance Curves – BVM (I/X) 4 Series

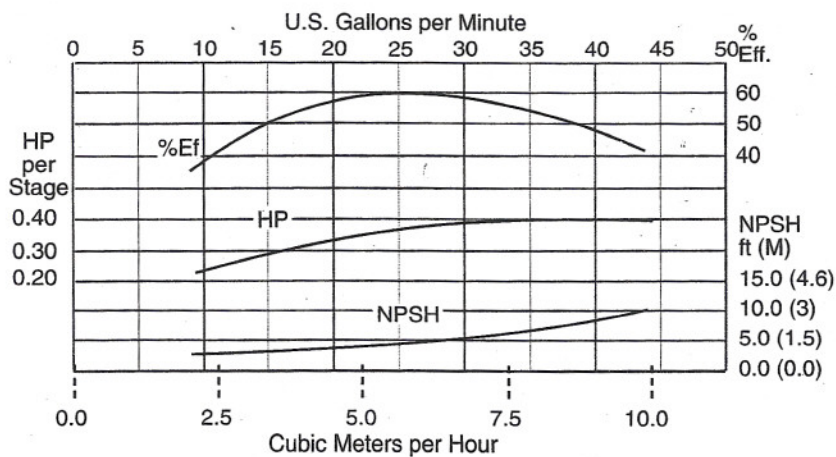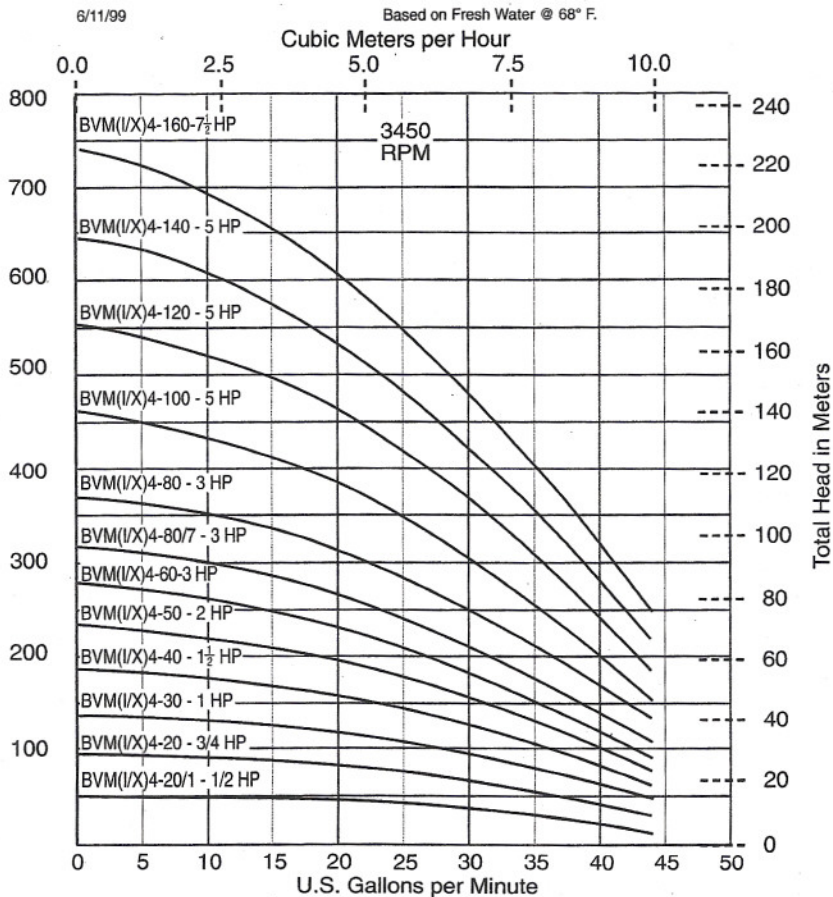

Permissible Operating Pressure Curves

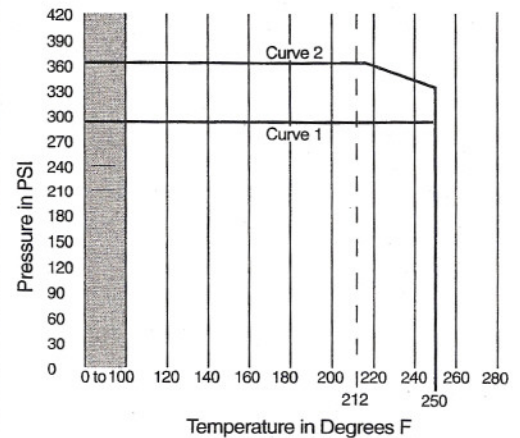

CURVE 1: BVM (I/X) 4-20/1 to
BVM (I/X) 4-120



CURVE 2: BVM (I/X) 4-140 to
BVM (I/X) 4-160

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

BVM4 SERIES

Cast Iron Construction

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

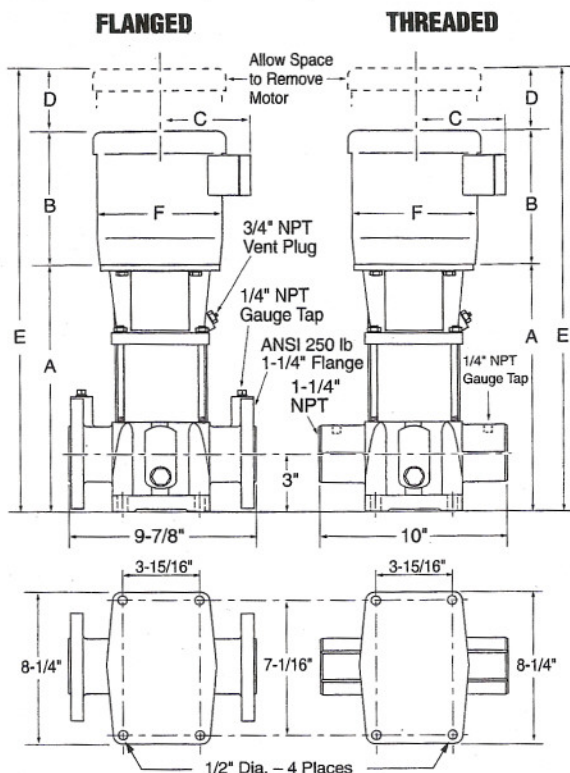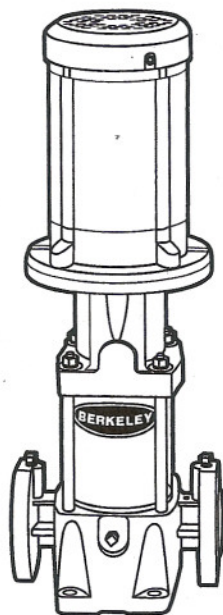

Technical Information

MINIMUM PUMPING RATES: 2 GPM

FLOW RANGE: 3 – 40 GPM

MINIMUM SUCTION PIPE SIZES:

1-1/4" Nominal Diameter, Schedule 40 Pipe

MAXIMUM INLET PRESSURE:

20/1 - 20 – 90 PSI

30 - 80/7 – 145 PSI

80 - 160 – 220 PSI


MAXIMUM AMBIENT TEMPERATURE: 104° F

LIQUID TEMPERATURE RANGE: +5° F to +250° F

MOTOR OPTIONS: TEFC or ODP

CONSTRUCTION MATERIALS: See Page 8.

1-1/4" ANSI. 250 lb. 4-Bolt Flange

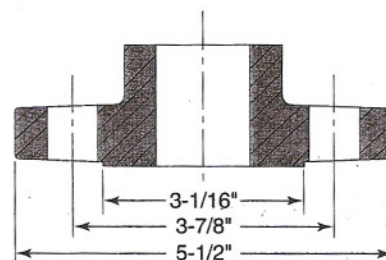

Dimensions and Specifications – BVM 4 Series



Model Number	HP	Motor S.F.	Ph	Volts	Frame Size	Disc. Size	Suc. Size	Dimension in Inches*						TEFC Wt.	ODP Wt.
								A	B	C	D	E	F		
BVM4-20/1	0.5	1.25	1	115/208-230	56C	1-1/4	1-1/4	11-3/8	9-1/4	4-7/8	2	22-5/8	6	73	65
BVM4-20/1	0.5	1.25	3	208-230/460	56C	1-1/4	1-1/4	11-3/8	9-1/4	4-7/8	2	22-5/8	6	73	64
BVM4-20	0.75	1.25	1	115/208-230	56C	1-1/4	1-1/4	11-3/8	9-7/8	4-7/8	2	23-2/8	6	75	70
BVM4-20	0.75	1.25	3	208-230/460	56C	1-1/4	1-1/4	11-3/8	9-1/4	4-7/8	2	22-5/8	6	73	77
BVM4-30	1	1.25	1	115/208-230	56C	1-1/4	1-1/4	12-3/8	11-1/8	5-1/4	2	25-5/8	7-1/8	92	85
BVM4-30	1	1.15	3	208-230/460	56C	1-1/4	1-1/4	12-3/8	9-1/4	4-7/8	2	23-3/4	6	88	81
BVM4-40	1.5	1.25	1	115/208-230	56C	1-1/4	1-1/4	13-1/2	11-1/8	5-5/8	2	26-5/8	7-1/8	92	87
BVM4-40	1.5	1.15	3	208-230/460	56C	1-1/4	1-1/4	13-1/2	10-1/8	5-3/4	2-1/8	25-3/4	7-1/4	90	84
BVM4-50	2	1.15	1	115/208-230	182/184C	1-1/4	1-1/4	14-1/2	12	5-5/8	2	28-5/8	7-1/8	104	97
BVM4-50	2	1.15	3	208-230/460	182/184C	1-1/4	1-1/4	14-1/2	11-1/8	5-3/4	2-1/8	27-3/4	7-1/4	97	88
BVM4-60	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	16	13-5/8	6-7/8	2-3/4	32-3/8	8-1/2	138	133
BVM4-60	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	16	12-1/4	6-7/8	2-7/8	31-1/8	8-1/2	120	102
BVM4-80/7	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	18-1/8	13-5/8	6-7/8	2-3/4	34-1/2	8-1/2	141	135
BVM4-80/7	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	18-1/8	12-1/4	6-7/8	2-7/8	33-2/8	8-1/2	123	104
BVM4-80	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	18-1/8	13-5/8	6-7/8	2-3/4	34-1/2	8-1/2	140	139
BVM4-80	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	18-1/8	12-1/4	6-7/8	2-7/8	33-1/4	8-1/2	125	108
BVM4-100	5	1.15	1	208-230	213TC	1-1/4	1-1/4	20-1/4	15-1/4	8	3-3/8	38-7/8	10-5/8	173	177
BVM4-100	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	20-1/4	13-5/8	6-7/8	2-7/8	36-3/4	8-1/2	156	145
BVM4-120	5	1.15	1	208-230	213TC	1-1/4	1-1/4	22-3/8	15-1/4	8	3-3/8	41	10-5/8	195	179
BVM4-120	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	22-3/8	13-5/8	6-7/8	2-7/8	38-7/8	8-1/2	159	149
BVM4-140	5	1.15	1	208-230	213TC	1-1/4	1-1/4	24-1/2	15-1/4	8	3-3/8	43-1/8	10-5/8	202	187
BVM4-140	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	24-1/2	13-5/8	6-7/8	2-7/8	41	8-1/2	167	157
BVM4-160	7.5	1.15	1	208-230	213TC	1-1/4	1-1/4	26-5/8	15-1/4	8	3-3/8	45-1/4	10-5/8	210	198
BVM4-160	7.5	1.15	3	208-230/460	213TC	1-1/4	1-1/4	26-5/8	15-1/4	7-7/8	3-3/8	45-1/4	10-3/8	175	160

* Measurements represent the largest number possible for each Model.

BVM (I/X) 4 SERIES

304 SS and 316 SS Construction

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

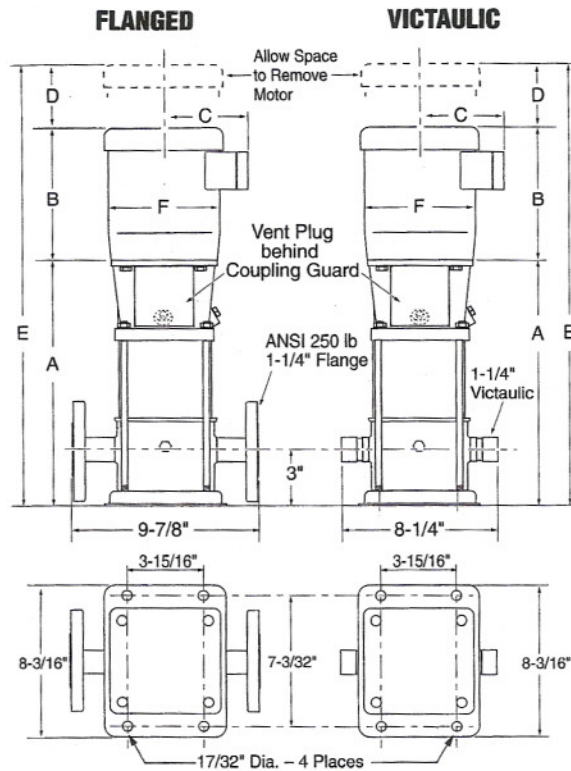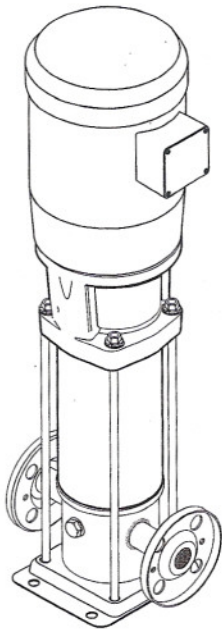

Technical Information

MINIMUM PUMPING RATES: 2 GPM

FLOW RANGE: 3 - 40 GPM

MINIMUM SUCTION PIPE SIZES:

1-1/4" Nominal Diameter, Schedule 40 Pipe

MAXIMUM INLET PRESSURE:

20/1 - 20 - 90 PSI

30 - 80/7 - 145 PSI


80 - 160 - 220 PSI

MAXIMUM AMBIENT TEMPERATURE: 104° F

LIQUID TEMPERATURE RANGE: +5° F to +250° F

MOTOR OPTIONS: TEFC or ODP

CONSTRUCTION MATERIALS: See Page 8.

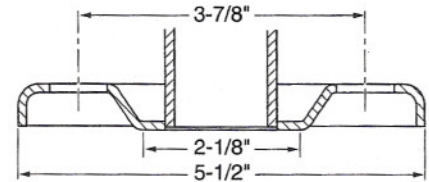

Dimensions and Specifications – BVM (I/X) 4 Series†

Model Number†	HP	Motor S.F.	Ph	Volts	Frame Size	Disc. Size	Suc. Size	Dimension in Inches*						TEFC Wt.	ODP Wt.
								A	B	C	D	E	F		
BVM(I/X)4-20/1	0.5	1.25	1	115/208-230	56C	1-1/4	1-1/4	11-3/4	9-1/4	4-7/8	2	23	6	73	65
BVM(I/X)4-20/1	0.5	1.25	3	208-230/460	56C	1-1/4	1-1/4	11-3/4	9-1/4	4-7/8	2	23	6	73	64
BVM(I/X)4-20	0.75	1.25	1	115/208-230	56C	1-1/4	1-1/4	11-3/4	9-7/8	4-7/8	2	23-5/8	6	75	70
BVM(I/X)4-20	0.75	1.25	3	208-230/460	56C	1-1/4	1-1/4	11-3/4	9-7/8	4-7/8	2	23-5/8	6	73	77
BVM(I/X)4-30	1	1.25	1	115/208-230	56C	1-1/4	1-1/4	12-3/4	11-1/8	5-1/4	2	26	7-1/8	92	85
BVM(I/X)4-30	1	1.15	3	208-230/460	56C	1-1/4	1-1/4	12-3/4	11-1/8	5-1/4	2	26	7-1/8	88	81
BVM(I/X)4-40	1.5	1.25	1	115/208-230	56C	1-1/4	1-1/4	13-7/8	11-1/8	5-3/4	2-1/8	27	7-1/4	92	87
BVM(I/X)4-40	1.5	1.15	3	208-230/460	56C	1-1/4	1-1/4	13-7/8	11-1/8	5-3/4	2-1/8	27	7-1/4	90	84
BVM(I/X)4-50	2	1.15	1	115/208-230	56C	1-1/4	1-1/4	14-7/8	12	5-3/4	2-1/8	29	7-1/4	104	97
BVM(I/X)4-50	2	1.15	3	208-230/460	56C	1-1/4	1-1/4	14-7/8	12	5-3/4	2-1/8	29	7-1/4	97	88
BVM(I/X)4-60	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	16 -3/8	13-5/8	6-7/8	2-7/8	32-7/8	8-1/2	138	133
BVM(I/X)4-60	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	16-3/8	13-5/8	6-7/8	2-7/8	32-7/8	8-1/2	120	102
BVM(I/X)4-80/7	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	18-1/2	13-5/8	6-7/8	2-7/8	35	8-1/2	141	135
BVM(I/X)4-80/7	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	18-1/2	13-5/8	6-7/8	2-7/8	35	8-1/2	123	104
BVM(I/X)4-80	3	1.15	1	115/208-230	182TC	1-1/4	1-1/4	18-1/2	13-5/8	6-7/8	2-7/8	35	8-1/2	140	139
BVM(I/X)4-80	3	1.15	3	208-230/460	182TC	1-1/4	1-1/4	18-1/2	13-5/8	6-7/8	2-7/8	35	8-1/2	125	108
BVM(I/X)4-100	5	1.15	1	208-230	213TC	1-1/4	1-1/4	20-5/8	15-1/4	8	3-3/8	39-1/4	10-5/8	173	177
BVM(I/X)4-100	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	20-5/8	15-1/4	8	3-3/8	39-1/4	10-5/8	156	145
BVM(I/X)4-120	5	1.15	1	208-230	213TC	1-1/4	1-1/4	22-3/4	15-1/4	8	3-3/8	41-3/8	10-5/8	195	179
BVM(I/X)4-120	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	22-3/4	15-1/4	8	3-3/8	41-3/8	10-5/8	159	149
BVM(I/X)4-140	5	1.15	1	208-230	213TC	1-1/4	1-1/4	24-7/8	15-1/4	8	3-3/8	43-1/2	10-5/8	202	187
BVM(I/X)4-140	5	1.15	3	208-230/460	184TC	1-1/4	1-1/4	24-7/8	15-1/4	8	3-3/8	43-1/2	10-5/8	167	157
BVM(I/X)4-160	7.5	1.15	1	208-230	213TC	1-1/4	1-1/4	27	15-1/4	8	3-3/8	45-3/8	10-5/8	210	198
BVM(I/X)4-160	7.5	1.15	3	208-230/460	213TC	1-1/4	1-1/4	27	15-1/4	8	3-3/8	45-3/8	10-5/8	175	160

* Measurements represent the largest number possible for each Model.

† Includes BMVI models constructed of 304 Stainless Steel and BVMX models constructed of 316 Stainless Steel.

BVM4 SERIES

VERTICAL MULTI-STAGE PUMPS

BVM4 SERIES VERTICAL MULTI-STAGE PUMPS
ALL UNITS LISTED BELOW ARE CAST IRON VERSION
ALL UNITS LISTED BELOW ARE FLANGED SUCTION & DISCHARGE
ALL UNITS LISTED BELOW HAVE TEFC MOTORS

<u>ASSEMBLY #</u>	<u>MODEL #</u>	<u>H.P.</u>	<u>PHASE</u>	<u>STAGES</u>
BVM4-20/1-----	B77864-----	1/2-----	1-----	1-----
BVM4-20/1-----	B77886-----	1/2-----	3-----	1-----
BVM4-20-----	B77865-----	3/4-----	1-----	2-----
BVM4-20-----	B77887-----	3/4-----	3-----	2-----
BVM4-30-----	B77866-----	1-----	1-----	3-----
BVM4-30-----	B77888-----	1-----	3-----	3-----
BVM4-40-----	B77867-----	1-1/2-----	1-----	4-----
BVM4-40-----	B77889-----	1-1/2-----	3-----	4-----
BVM4-50-----	B77868-----	2-----	1-----	5-----
BVM4-50-----	B77890-----	2-----	3-----	5-----
BVM4-60-----	B77869-----	3-----	1-----	6-----
BVM4-60-----	B77891-----	3-----	3-----	6-----
BVM4-80/7-----	B77870-----	3-----	1-----	7-----
BVM4-80/7-----	B77892-----	3-----	3-----	7-----
BVM4-80-----	B77871-----	3-----	1-----	8-----
BVM4-80-----	B77893-----	3-----	3-----	8-----
BVM4-100-----	B77872-----	5-----	1-----	10-----
BVM4-100-----	B77894-----	5-----	3-----	10-----
BVM4-120-----	B77873-----	5-----	1-----	12-----
BVM4-120-----	B77895-----	5-----	3-----	12-----
BVM4-140-----	B77874-----	5-----	1-----	14-----
BVM4-140-----	B77896-----	5-----	3-----	14-----
BVM4-160-----	B77875-----	7-1/2-----	1-----	16-----
BVM4-160-----	B77897-----	7-1/2-----	3-----	16-----

**SUCTION and DISCHARGE
1 1/4 INCH---ANSI. 250 LB.
4-BOLT FLANGE**

OPTIONS AVAILABLE

1. 304 STAINLESS STEEL WET END CONSTRUCTION
2. 316 STAINLESS STEEL WET END CONSTRUCTION

ORDER SPECIAL FLANGES SEPARATELY


BVM (I/X) 2 & 4 SERIES

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

Construction Materials

Description	Cast Iron	304 Stainless Steel	316 Stainless Steel	Optional Accessories
Shaft	AISI 316 SS	AISI 316 SS	AISI 316 SS	
Impellers, Diffuser Chambers, Pump Sleeve, Suction Interconnector, and Shaft Seal Parts	AISI 304 SS	AISI 304 SS	AISI 316 SS	
Suction/discharge, motor bracket	Class 30 Cast Iron	Class 30 Cast Iron	Class 30 Cast Iron	
Motor Couplings	Class 30 Cast Iron	Class 30 Cast Iron	Class 30 Cast Iron	
Intermediate Chamber Bearings	Aluminum Oxide Ceramic	Aluminum Oxide Ceramic	Aluminum Oxide Ceramic	
Bearing Ring	Tungsten Carbide	Tungsten Carbide	Tungsten Carbide	
O-Rings	EPDM	EPDM	EPDM	Viton*
Neck Rings	Teflon	Teflon	Teflon	
Sleeve Gaskets	Non-Asbestos Fiber	Non-Asbestos Fiber	Non-Asbestos Fiber	
Shaft Spacers	AISI 316 SS	AISI 316 SS	AISI 316 SS	
Top Spring	AISI 316 SS	AISI 316 SS	AISI 316 SS	
Coupling Guard	AISI 302 SS	AISI 302 SS	AISI 302 SS	
Staybolts, Nuts & Washers	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	
Mechanical Seal (Standard) (BVM (I/X) 2 30/2 - 120) (BVM (I/X) 4 20/1 - 120)				
• Stationary Face	Carbon	Carbon	Carbon	
• Rotating Face	Silicon Carbide	Silicon Carbide	Silicon Carbide	
• Secondary Seal	EPDM	EPDM	EPDM	
• Seal Drivers	AISI 316 SS	AISI 316 SS	AISI 316 SS	
• Spring	AISI 316 SS	AISI 316 SS	AISI 316 SS	
• Bellows	EPDM	EPDM	EPDM	
Mechanical Seal (High Pressure) (BVM (I/X) 2 150 - 180) (BVM (I/X) 4 140 - 160)				
• Stationary Face	Tungsten Carbide	Tungsten Carbide	Tungsten Carbide	
• Rotating Face	Tungsten Carbide	Tungsten Carbide	Tungsten Carbide	
• O-Rings	EPDM	EPDM	EPDM	Viton*
• Upper and Lower Drivers	AISI 316 SS	AISI 316 SS	AISI 316 SS	
• Spring	AISI 316 SS	AISI 316 SS	AISI 316 SS	

* Pumps with Viton O-Rings will be supplied with the Berkeley High Pressure Seal, also with Viton O-Rings. Consult price list for pricing.


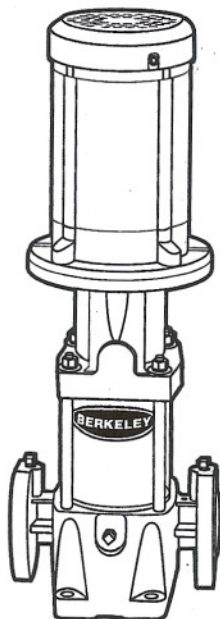


VERTICAL MULTI-STAGE PUMPS


BVM (I/X) 8 SERIES

VERTICAL MULTI-STAGE PUMPS

Performance Curves – BVM (I/X) 8 Series

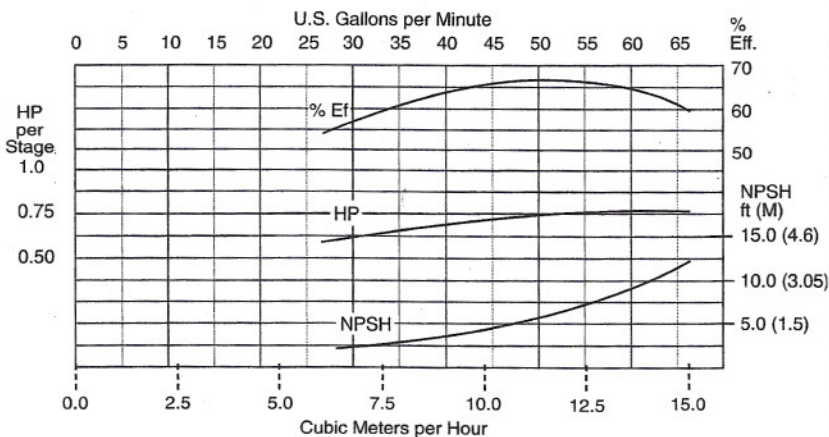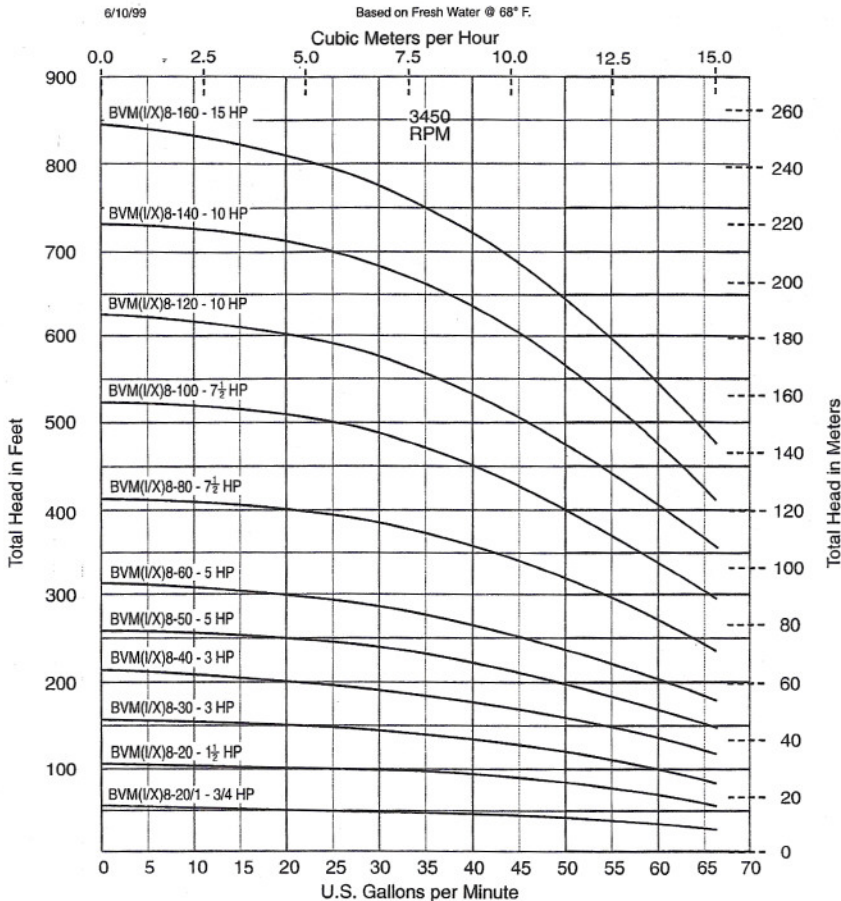

Permissible Operating Pressure Curves

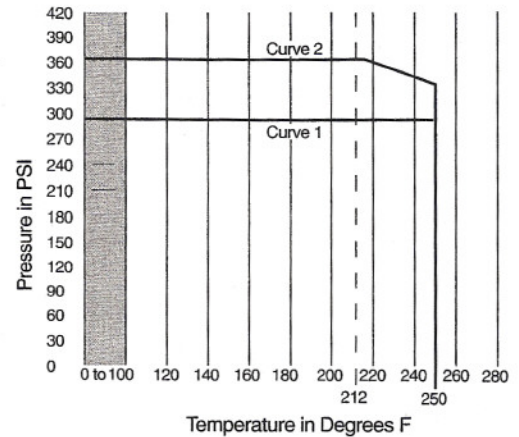

CURVE 1: BVM (I/X) 8-20/1 to BVM (I/X) 8-120



CURVE 2: BVM (I/X) 8-140 to BVM (I/X) 8-160

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

BVM8 SERIES

Cast Iron Construction

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

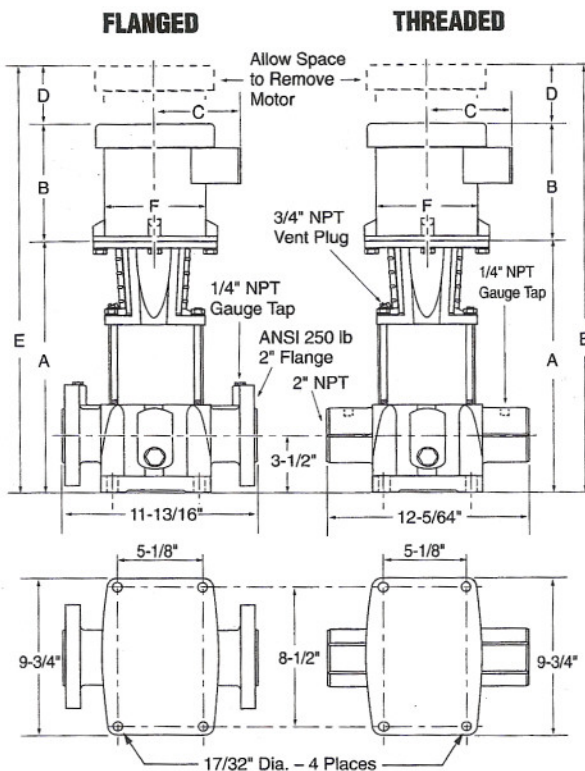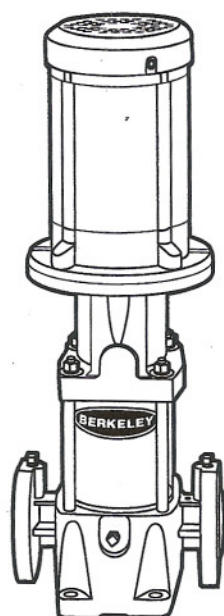

Technical Information

MINIMUM PUMPING RATES: 4 GPM

FLOW RANGE: 5.3 – 65 GPM

MINIMUM SUCTION PIPE SIZES:

2" Nominal Diameter, Schedule 40 Pipe

MAXIMUM INLET PRESSURE:

20/1 - 40 – 90 PSI

50 - 160 – 145 PSI


MAXIMUM AMBIENT TEMPERATURE: 104° F

LIQUID TEMPERATURE RANGE: +5° F to +250° F

MOTOR OPTIONS: TEFC or ODP

CONSTRUCTION MATERIALS: See Page 15.

2" ANSI. 250 lb. 8-Bolt Flange

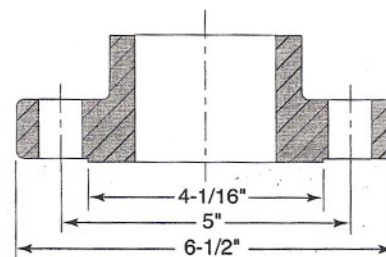

Dimensions and Specifications – BVM 8 Series



Model Number	HP	Motor S.F.	Ph	Volts	Frame Size	Disc. Size	Suc. Size	Dimension in Inches*						TEFC Wt.	ODP Wt.
								A	B	C	D	E	F		
BVM8-20/1	0.75	1.25	1	115/208-230	56C	2	2	15	9-7/8	4-7/8	2	27	6	104	97
BVM8-20/1	0.75	1.25	3	208-230/460	56C	2	2	15	9-1/4	4-7/8	2	26-3/8	6	101	95
BVM8-20	1.5	1.25	1	115/208-230	56C	2	2	15	11-1/8	5-5/8	2	28-1/4	7-1/8	118	110
BVM8-20	1.5	1.15	3	208-230/460	56C	2	2	15	10-1/8	5-3/4	2-1/8	27-1/4	7-1/4	113	100
BVM8-30	3	1.15	1	115/208-230	182TC	2	2	17-3/4	13-5/8	6-7/8	2-3/4	34-1/8	8-1/2	174	138
BVM8-30	3	1.15	3	208-230/460	182TC	2	2	17-3/4	12-1/4	6-7/8	2-7/8	32-7/8	8-1/2	153	118
BVM8-40	3	1.15	1	115/208-230	182TC	2	2	18-7/8	13-5/8	6-7/8	2-3/4	35-3/8	8-1/2	179	144
BVM8-40	3	1.15	3	208-230/460	182TC	2	2	18-7/8	12-1/4	6-7/8	2-7/8	34-1/8	8-1/2	158	124
BVM8-50	5	1.15	1	208-230	213TC	2	2	20-1/8	15-1/4	8	3-3/8	38-3/4	10-5/8	193	161
BVM8-50	5	1.15	3	208-230/460	184TC	2	2	20-1/8	13-5/8	6-7/8	2-7/8	36-5/8	8-1/2	190	152
BVM8-60	5	1.15	1	208-230	213TC	2	2	21-1/4	15-1/4	8	3-3/8	40	10-5/8	235	167
BVM8-60	5	1.15	3	208-230/460	184TC	2	2	21-1/4	13-5/8	6-7/8	2-7/8	37-7/8	8-1/2	203	158
BVM8-80	7.5	1.15	1	208-230	213TC	2	2	23-5/8	15-1/4	8	3-3/8	42-1/4	10-5/8	244	223
BVM8-80	7.5	1.15	3	208-230/460	213TC	2	2	23-5/8	15-1/4	7-7/8	3-3/8	42-1/4	10-3/8	222	195
BVM8-100	7.5	1.15	1	208-230	213TC	2	2	26	15-1/4	8	3-3/8	44-5/8	10-5/8	254	235
BVM8-100	7.5	1.15	3	208-230/460	213TC	2	2	26	15-1/4	7-7/8	3-3/8	44-5/8	10-3/8	226	206
BVM8-120	10	1.15	1	208-230	215TC	2	2	28-3/8	16-3/8	8-3/4	3-3/8	48-1/8	10-5/8	294	265
BVM8-120	10	1.15	3	208-230/460	215TC	2	2	28-3/8	15-1/4	8	3-3/8	47	10-3/8	255	227
BVM8-140	10	1.15	1	208-230	215TC	2	2	30-3/4	16-3/8	8-3/4	3-3/8	50-1/2	10-5/8	300	275
BVM8-140	10	1.15	3	208-230/460	215TC	2	2	30-3/4	15-1/4	8	3-3/8	49-3/8	10-3/8	340	273
BVM8-160	15	1.15	3	208-230/460	254TC	2	2	33-5/8	19-5/8	9-1/2	4-1/4	57-1/2	13	350	306

* Measurements represent the largest number possible for each Model.

BVM (I/X) 8 SERIES

304 SS and 316 SS Construction

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

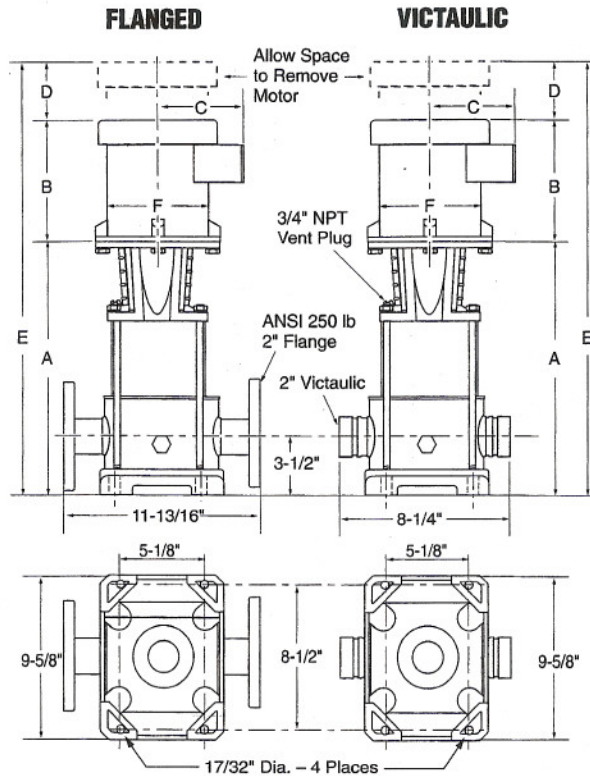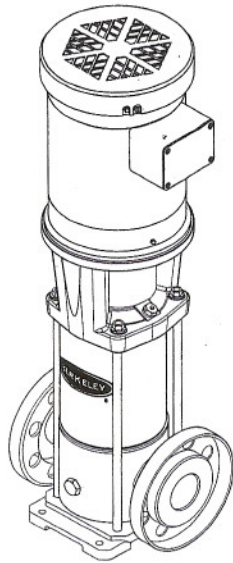

Technical Information

MINIMUM PUMPING RATES: 4 GPM

FLOW RANGE: 5.3 – 65 GPM

MINIMUM SUCTION PIPE SIZES:

2" Nominal Diameter, Schedule 40 Pipe

MAXIMUM INLET PRESSURE:

20/1 - 40 – 90 PSI


50 - 160 – 145 PSI

MAXIMUM AMBIENT TEMPERATURE: 104° F

LIQUID TEMPERATURE RANGE: +5° F to +250° F

MOTOR OPTIONS: TEFC or ODP

CONSTRUCTION MATERIALS: See Page 15.

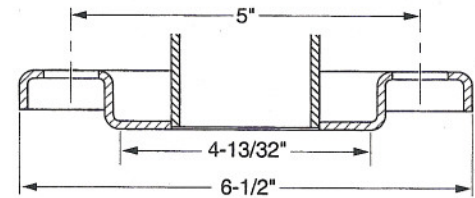

Dimensions and Specifications – BVM (I/X) 8 Series†

Model Number†	HP	Motor S.F.	Ph	Volts	Frame Size	Disc. Size	Suc. Size	Dimension in Inches*						TEFC Wt.	ODP Wt.
								A	B	C	D	E	F		
BVM(I/X)8-20/1	0.75	1.25	1	115/208-230	56C	2	2	15	9-7/8	4-7/8	2	27	6	104	97
BVM(I/X)8-20/1	0.75	1.25	3	208-230/460	56C	2	2	15	9-7/8	4-7/8	2	27	6	101	95
BVM(I/X)8-20	1.5	1.25	1	115/208-230	56C	2	2	15	11-1/8	5-3/4	2-1/8	28-1/4	7-1/4	118	110
BVM(I/X)8-20	1.5	1.15	3	208-230/460	56C	2	2	15	11-1/8	5-3/4	2-1/8	28-1/4	7-1/4	113	100
BVM(I/X)8-30	3	1.15	1	115/208-230	182TC	2	2	17-3/4	13-5/8	6-7/8	2-7/8	34-1/4	8-1/2	174	138
BVM(I/X)8-30	3	1.15	3	208-230/460	182TC	2	2	17-3/4	13-5/8	6-7/8	2-7/8	34-1/4	8-1/2	153	118
BVM(I/X)8-40	3	1.15	1	115/208-230	182TC	2	2	18-7/8	13-5/8	6-7/8	2-7/8	35-1/2	8-1/2	179	144
BVM(I/X)8-40	3	1.15	3	208-230/460	182TC	2	2	18-7/8	13-5/8	6-7/8	2-7/8	35-1/2	8-1/2	158	124
BVM(I/X)8-50	5	1.15	1	208-230	213TC	2	2	20-1/8	15-1/4	8	3-3/8	38-3/4	10-5/8	193	161
BVM(I/X)8-50	5	1.15	3	208-230/460	184TC	2	2	20-1/8	15-1/4	8	3-3/8	38-3/4	10-5/8	190	152
BVM(I/X)8-60	5	1.15	1	208-230	213TC	2	2	21-1/4	15-1/4	8	3-3/8	40	10-5/8	235	167
BVM(I/X)8-60	5	1.15	3	208-230/460	184TC	2	2	21-1/4	13 - 15-1/4	8	3-3/8	40	10-5/8	203	158
BVM(I/X)8-80	7.5	1.15	1	208-230	213TC	2	2	23-5/8	15-1/4	8	3-3/8	42-1/4	10-5/8	244	223
BVM(I/X)8-80	7.5	1.15	3	208-230/460	213TC	2	2	23-5/8	15-1/4	8	3-3/8	42-1/4	10-5/8	222	195
BVM(I/X)8-100	7.5	1.15	1	208-230	213TC	2	2	26	15-1/4	8	3-3/8	44-5/8	10-5/8	254	235
BVM(I/X)8-100	7.5	1.15	3	208-230/460	213TC	2	2	26	15-1/4	8	3-3/8	44-5/8	10-5/8	226	206
BVM(I/X)8-120	10	1.15	1	208-230	215TC	2	2	28-3/8	16-1/2	8-3/4	3-3/8	48-1/4	10-5/8	294	265
BVM(I/X)8-120	10	1.15	3	208-230/460	215TC	2	2	28-3/8	16-1/2	8-3/4	3-3/8	48-1/4	10-5/8	255	227
BVM(I/X)8-140	10	1.15	1	208-230	215TC	2	2	30-3/4	16-3/8	8-3/4	3-3/8	50-1/2	10-5/8	300	275
BVM(I/X)8-140	10	1.15	3	208-230/460	215TC	2	2	30-3/4	16-3/8	8-3/4	3-3/8	50-1/2	10-5/8	340	273
BVM(I/X)8-160	15	1.15	3	208-230/460	254TC	2	2	33-5/8	19-5/8	9-1/2	4-1/4	57-1/2	13	350	306

* Measurements represent the largest number possible for each Model.

† Includes BMV models constructed of 304 Stainless Steel and BVMX models constructed of 316 Stainless Steel.

BVM8 SERIES

VERTICAL MULTI-STAGE PUMPS

BVM8 SERIES VERTICAL MULTI-STAGE PUMPS
ALL UNITS LISTED BELOW ARE CAST IRON VERSION
ALL UNITS LISTED BELOW ARE FLANGED SUCTION & DISCHARGE
ALL UNITS LISTED BELOW HAVE TEFC MOTORS

<u>ASSEMBLY #</u>	<u>MODEL #</u>	<u>H.P.</u>	<u>PHASE</u>	<u>STAGES</u>
BVM8-20/1-----	B77898-----	3/4-----	1-----	1-----
BVM8-20/1-----	B77912-----	3/4-----	3-----	1-----
BVM8-20-----	B77899-----	1-1/2-----	1-----	2-----
BVM8-20-----	B77913-----	1-1/2-----	3-----	2-----
BVM8-30-----	B77900-----	3-----	1-----	3-----
BVM8-30-----	B77914-----	3-----	3-----	3-----
BVM8-40-----	B77901-----	3-----	1-----	4-----
BVM8-40-----	B77915-----	3-----	3-----	4-----
BVM8-50-----	B77902-----	5-----	1-----	5-----
BVM8-50-----	B77916-----	5-----	3-----	5-----
BVM8-60-----	B77903-----	5-----	1-----	6-----
BVM8-60-----	B77917-----	5-----	3-----	6-----
BVM8-80-----	B77904-----	7-1/2-----	1-----	8-----
BVM8-80-----	B77918-----	7-1/2-----	3-----	8-----
BVM8-100-----	B77905-----	7-1/2-----	1-----	10-----
BVM8-100-----	B77919-----	7-1/2-----	3-----	10-----
BVM8-120-----	B77906-----	10-----	1-----	12-----
BVM8-120-----	B77920-----	10-----	3-----	12-----
BVM8-140-----	B77907-----	10-----	1-----	14-----
BVM8-140-----	B77921-----	10-----	3-----	14-----
BVM8-160-----	B78031-----	15-----	3-----	16-----

**SUCTION and DISCHARGE
2 INCH---ANSI. 250 LB.
8 - BOLT FLANGE**

OPTIONS AVAILABLE



- 1. 304 STAINLESS STEEL WET END CONSTRUCTION**
- 2. 316 STAINLESS STEEL WET END CONSTRUCTION**

ORDER SPECIAL FLANGES SEPARATELY


BVM (I/X) 16 SERIES

VERTICAL MULTI-STAGE PUMPS

Performance Curves – BVM (I/X) 16 Series

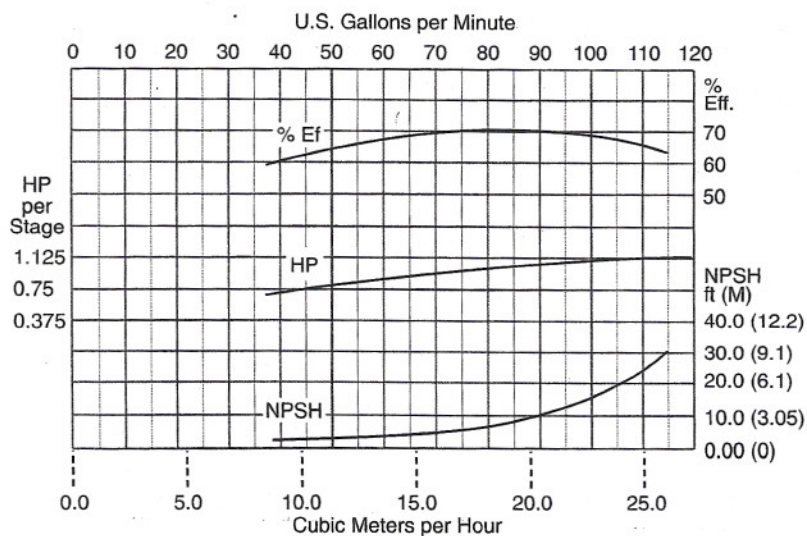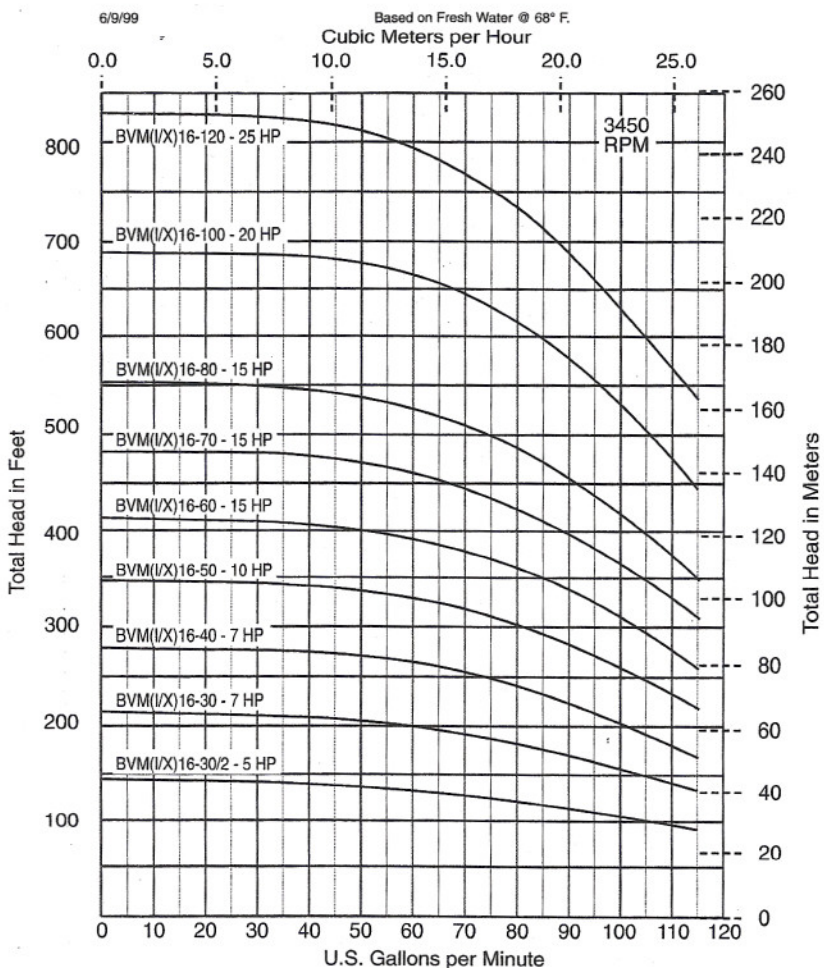

Permissible Operating Pressure Curves

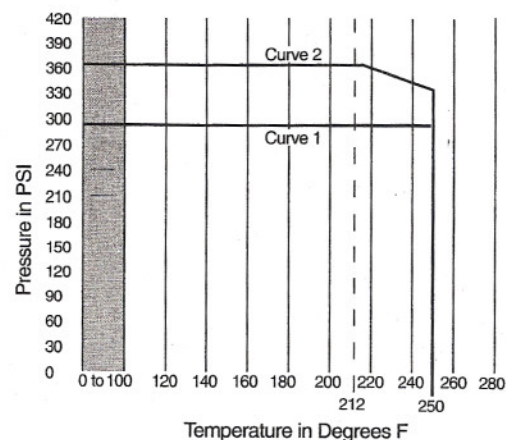

CURVE 1: BVM (I/X) 16-30/2 to
BVM (I/X) 16-80



CURVE 2: BVM (I/X) 16-100 to
BVM (I/X) 16-120

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

BVM16 SERIES

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

Cast Iron Construction

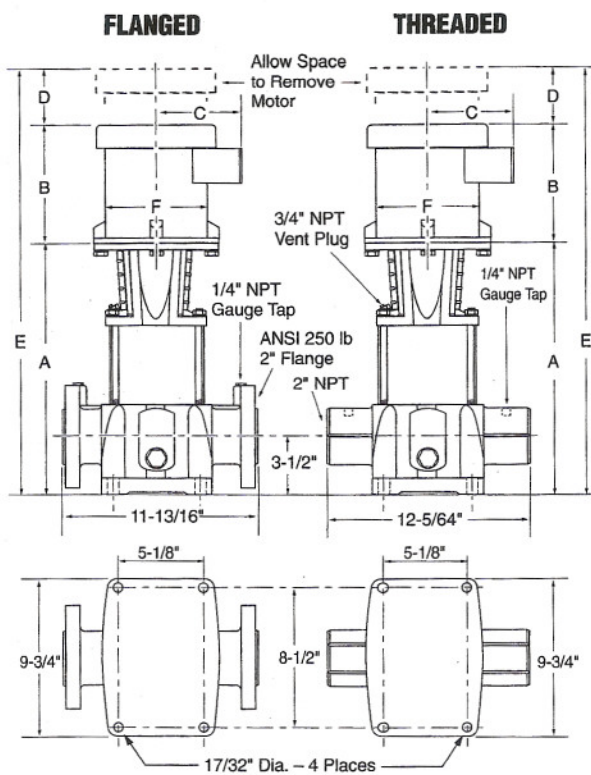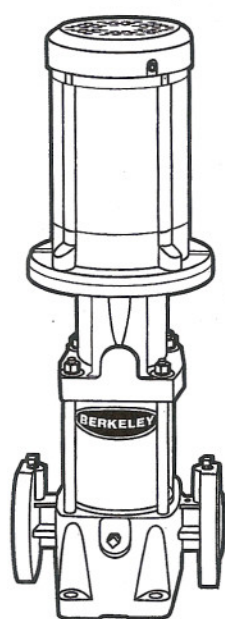

Technical Information

MINIMUM PUMPING RATES: 8 GPM

FLOW RANGE: 8.5 – 115 GPM

MINIMUM SUCTION PIPE SIZES:
2" Nominal Diameter, Schedule 40 Pipe

MAXIMUM INLET PRESSURE:
30/2 - 30 - 90 PSI
40 - 120 - 145 PSI


MAXIMUM AMBIENT TEMPERATURE: 104° F

LIQUID TEMPERATURE RANGE: +5° F to +250° F

MOTOR OPTIONS: TEFC or ODP

CONSTRUCTION MATERIALS: See Page 15.

2" ANSI. 250 lb. 8-Bolt Flange

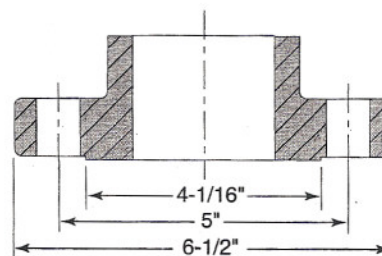

Dimensions and Specifications – BVM 16 Series



Model Number	HP	Motor S.F.	Ph	Volts	Frame Size	Disc. Size	Suc. Size	Dimension in Inches*						TEFC Wt.	ODP Wt.
								A	B	C	D	E	F		
BVM16-30/2	5	1.15	1	208-230	213TC	2	2	19-5/8	15-1/4	8	3-3/8	38-1/4	10-5/8	239	204
BVM16-30/2	5	1.15	3	208-230/460	184TC	2	2	19-5/8	13-5/8	6-7/8	2-7/8	36-1/8	8-1/2	187	171
BVM16-30	7.5	1.15	1	208-230	213TC	2	2	19-5/8	15-1/4	8	3-3/8	38-1/4	10-5/8	226	217
BVM16-30	7.5	1.15	3	208-230/460	213TC	2	2	19-5/8	15-1/4	7-1/2	3-3/8	38-1/4	10-3/8	202	189
BVM16-40	7.5	1.15	1	208-230	213TC	2	2	21-3/8	15-1/4	8	3-3/8	40	10-5/8	254	220
BVM16-40	7.5	1.15	3	208-230/460	213TC	2	2	21-3/8	15-1/4	7-7/8	3-3/8	40	10-3/8	206	192
BVM16-50	10	1.15	1	208-230	215TC	2	2	23-1/8	16-3/8	8-3/4	3-3/8	42-7/8	10-5/8	427	247
BVM16-50	10	1.15	3	208-230/460	215TC	2	2	23-1/8	15-1/4	8	3-3/8	41-3/4	10-3/8	251	209
BVM16-60	15	1.15	3	208-230/460	254TC	2	2	25-3/8	19-5/8	9-1/2	4-1/4	49-1/4	13	343	221
BVM16-70	15	1.15	3	208-230/460	254TC	2	2	27-1/8	19-5/8	9-1/2	4-1/4	51	13	336	224
BVM16-80	15	1.15	3	208-230/460	254TC	2	2	28-7/8	19-5/8	9-1/2	4-1/4	52-7/8	13	337	231
BVM16-100	20	1.15	3	230/460	254TC	2	2	32	21-3/4	9-1/8	4	57-3/4	11-1/2	418	347
BVM16-120	25	1.15	3	230/460	284TSC	2	2	35-3/8	21-3/4	9-1/2	3-1/4	60-3/8	13	471	559

* Measurements represent the largest number possible for each Model.

BVM (I/X) 16 SERIES

304 SS and 316 SS Construction

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

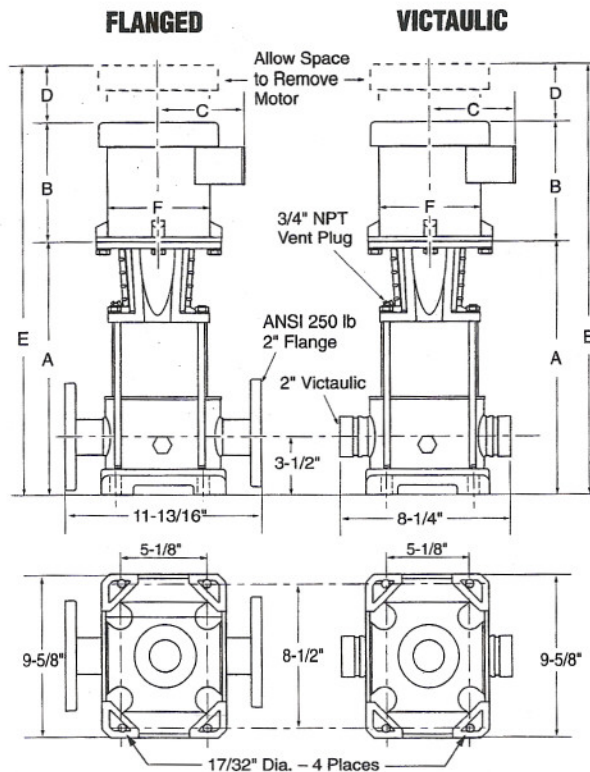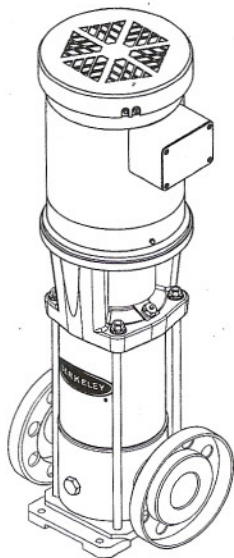

Technical Information

MINIMUM PUMPING RATES: 8 GPM

FLOW RANGE: 8.5 – 115 GPM

MINIMUM SUCTION PIPE SIZES:

2" Nominal Diameter, Schedule 40 Pipe

MAXIMUM INLET PRESSURE:

30/2 - 30 - 90 PSI


40 - 120 - 145 PSI

MAXIMUM AMBIENT TEMPERATURE: 104° F

LIQUID TEMPERATURE RANGE: +5° F to +250° F

MOTOR OPTIONS: TEFC or ODP

CONSTRUCTION MATERIALS: See Page 15.

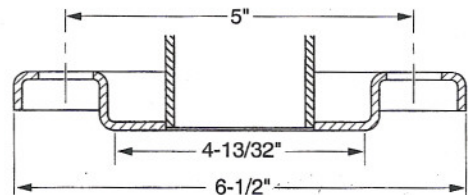

Dimensions and Specifications – BVM (I/X) 16 Series†

Model Number†	HP	Motor S.F.	Ph	Volts	Frame Size	Disc. Size	Suc. Size	Dimension in Inches*						TEFC Wt.	ODP Wt.
								A	B	C	D	E	F		
BVM(I/X)16-30/2	5	1.15	1	208-230	213TC	2	2	19-1/2	15-1/4	8	3-3/8	38-1/4	10-5/8	239	204
BVM(I/X)16-30/2	5	1.15	3	208-230/460	184TC	2	2	19-1/2	15-1/4	8	3-3/8	38-1/4	10-5/8	187	171
BVM(I/X)16-30	7.5	1.15	1	208-230	213TC	2	2	19-1/2	15-1/4	8	3-3/8	38-1/4	10-5/8	226	217
BVM(I/X)16-30	7.5	1.15	3	208-230/460	213TC	2	2	19-1/2	15-1/4	8	3-3/8	38-1/4	10-5/8	202	189
BVM(I/X)16-40	7.5	1.15	1	208-230	213TC	2	2	21-3/8	15-1/4	8	3-3/8	40	10-5/8	254	220
BVM(I/X)16-40	7.5	1.15	3	208-230/460	213TC	2	2	21-3/8	15-1/4	8	3-3/8	40	10-5/8	206	192
BVM(I/X)16-50	10	1.15	1	208-230	215TC	2	2	23-1/8	16-3/8	8-3/4	3-3/8	42-7/8	10-5/8	427	247
BVM(I/X)16-50	10	1.15	3	208-230/460	215TC	2	2	23-1/8	16-3/8	8-3/4	3-3/8	42-7/8	10-5/8	251	209
BVM(I/X)16-60	15	1.15	3	208-230/460	254TC	2	2	25-3/8	19-5/8	9-1/2	4-1/4	49-1/4	13	343	221
BVM(I/X)16-70	15	1.15	3	208-230/460	254TC	2	2	27-1/8	19-5/8	9-1/2	4-1/4	51	13	336	224
BVM(I/X)16-80	15	1.15	3	208-230/460	254TC	2	2	28-7/8	19-5/8	9-1/2	4-1/4	52-7/8	13	337	231
BVM(I/X)16-100	20	1.15	3	230/460	254TC	2	2	32	21-3/4	9-1/8	4	57-3/4	11-1/2	418	347
BVM(I/X)16-120	25	1.15	3	230/460	284TSC	2	2	35-3/8	21-3/4	9-1/2	3-1/4	60-3/8	13	471	559

* Measurements represent the largest number possible for each Model.

† Includes BMVI models constructed of 304 Stainless Steel and BVMX models constructed of 316 Stainless Steel.

BVM16 SERIES

VERTICAL MULTI-STAGE PUMPS

BVM16 SERIES VERTICAL MULTI-STAGE PUMPS
ALL UNITS LISTED BELOW ARE CAST IRON VERSION
ALL UNITS LISTED BELOW ARE FLANGED SUCTION & DISCHARGE
ALL UNITS LISTED BELOW HAVE TEFC MOTORS

<u>ASSEMBLY #</u>	<u>MODEL #</u>	<u>H.P.</u>	<u>PHASE</u>	<u>STAGES</u>
BVM16-30/2----	B77908-----	5-----	1-----	2-----
BVM16-30/2----	B77922-----	5-----	3-----	2-----
BVM16-30-----	B77909-----	7-1/2----	1-----	3-----
BVM16-30-----	B77923-----	7-1/2----	3-----	3-----
BVM16-40-----	B77910-----	7-1/2----	1-----	4-----
BVM16-40-----	B77924-----	7-1/2----	3-----	4-----
BVM16-50-----	B77911-----	10-----	1-----	5-----
BVM16-50-----	B77925-----	10-----	3-----	5-----
BVM16-60-----	B77926-----	15-----	3-----	6-----
BVM16-70-----	B77927-----	15-----	3-----	7-----
BVM16-80-----	B77928-----	15-----	3-----	8-----
BVM16-100-----	B77929-----	20-----	3-----	10-----
BVM16-120-----	B77930-----	25-----	3-----	12-----

**SUCTION and DISCHARGE
2 INCH---ANSI. 250 LB.
8 - BOLT FLANGE**

OPTIONS AVAILABLE

- 1. 304 STAINLESS STEEL WET END CONSTRUCTION**
- 2. 316 STAINLESS STEEL WET END CONSTRUCTION**

ORDER SPECIAL FLANGES SEPARATELY


BVM (I/X) 8 & 16 SERIES

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

Construction Materials

Description	Cast Iron	304 Stainless Steel	316 Stainless Steel	Optional Accessories
Shaft	AISI 431 SS	AISI 304 SS	AISI 316 SS	
Impellers, Diffuser Chambers, Pump Sleeve, Suction Interconnector, and Shaft Seal Parts	AISI 304 SS	AISI 304 SS	AISI 316 SS	
Suction/discharge, motor bracket	Class 30 Cast Iron	Class 30 Cast Iron	Class 30 Cast Iron	
Motor Couplings	Class 30 Cast Iron	Class 30 Cast Iron	Class 30 Cast Iron	
Intermediate Chamber	Aluminum Oxide	Aluminum Oxide	Aluminum Oxide	
Bearings	Ceramic	Ceramic	Ceramic	
Bearing Ring	Tungsten Carbide	Tungsten Carbide	Tungsten Carbide	
O-Rings	EPDM	EPDM	EPDM	Viton*
Neck Rings	Teflon	Teflon	Teflon	
Sleeve Gaskets	Non-Asbestos Fiber	Non-Asbestos Fiber	Non-Asbestos Fiber	
Shaft Spacers	AISI 316 SS	AISI 316 SS	AISI 316 SS	
Top Spring	AISI 316 SS	AISI 316 SS	AISI 316 SS	
Coupling Guard	AISI 302 SS	AISI 302 SS	AISI 302 SS	
Staybolts, Nuts & Washers	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	
Mechanical Seal (Standard) (BVM (I/X) 8 20/1 - 120) (BVM (I/X) 16 30/2 - 80)	Carbon Silicon Carbide EPDM AISI 316 SS AISI 316 SS EPDM	Carbon Silicon Carbide EPDM AISI 316 SS AISI 316 SS EPDM	Carbon Silicon Carbide EPDM AISI 316 SS AISI 316 SS EPDM	
Mechanical Seal (High Pressure) (BVM (I/X) 8 140 - 160) (BVM (I/X) 16 100 - 120)	Tungsten Carbide Tungsten Carbide EPDM AISI 316 SS AISI 316 SS	Tungsten Carbide Tungsten Carbide EPDM AISI 316 SS AISI 316 SS	Tungsten Carbide Tungsten Carbide EPDM AISI 316 SS AISI 316 SS	Viton*

* Pumps with Viton O-Rings will be supplied with the Berkeley High Pressure Seal, also with Viton O-Rings. Consult price list for pricing.

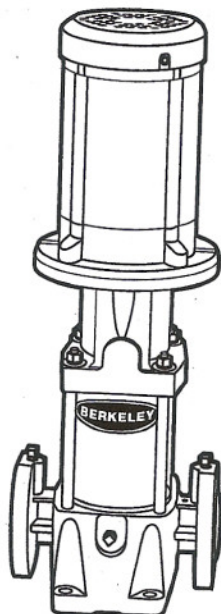

VERTICAL MULTI-STAGE PUMPS

BVM SERIES

CAST IRON CROSS REFERENCE

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

Complete Pump Assemblies			Single Phase Catalog Numbers				Three Phase 230/460V Catalog Numbers				Pump Ends		Pump Stacks
			O. D. P. Motor		T.E.F.C. Motor		O. D. P. Motor		T.E.F.C. Motor				
Series	Stages	HP	Flanged	NPT	Flanged	NPT	Flanged	NPT	Flanged	NPT	Flanged	NPT	Stack Only
BVM2-30/2	2	0.5	B77457	B78156	B77854	B78158	B77497	B78157	B77876	B78159	B77725	B78160	B76613RS
BVM2-30	3	0.75	B77458	B78162	B77855	B78164	B77498	B78163	B77877	B78165	B77726	B78166	B76614RS
BVM2-40	4	1	B77459	B78168	B77856	B78170	B77499	B78169	B77878	B78171	B77727	B78172	B76615RS
BVM2-50	5	1.5	B77534	B78174	B77857	B78176	B77535	B78175	B77879	B78177	B77728	B78178	B76616RS
BVM2-60	6	1.5	B77460	B78180	B77858	B78182	B77500	B78181	B77880	B78183	B77729	B78184	B76617RS
BVM2-70	7	2	B77461	B78186	B77859	B78188	B77501	B78187	B77881	B78189	B77730	B78190	B76618RS
BVM2-80	8	2	B77462	B78192	B77860	B78194	B77502	B78193	B77882	B78195	B77731	B78196	B76619RS
BVM2-100	10	3	B77463	B78198	B77861	B78200	B77503	B78199	B77883	B78201	B77732	B78202	B76620RS
BVM2-120	12	3	B77464	B78204	B77862	B78206	B77504	B78205	B77884	B78207	B77733	B78208	B76621RS
BVM2-150	15	5	B77465	B78210	B77863	B78212	B77505	B78211	B77885	B78213	B77734	B78214	B76622RS
BVM2-180	18	5	B78026	B78288	B78029	B78290	B78027	B78289	B78030	B78291	B78024	B78292	B78022RS
BVM4-20/1	1	0.5	B77466	B78216	B77864	B78218	B77506	B78217	B77886	B78219	B77735	B78220	B76623RS
BVM4-20	2	0.75	B77467	B78222	B77865	B78224	B77507	B78223	B77887	B78225	B77736	B78226	B76624RS
BVM4-30	3	1	B77468	B78228	B77866	B78230	B77508	B78229	B77888	B78231	B77737	B78232	B76625RS
BVM4-40	4	1.5	B77469	B78234	B77867	B78236	B77509	B78235	B77889	B78237	B77738	B78238	B76626RS
BVM4-50	5	2	B77470	B78240	B77868	B78242	B77510	B78241	B77890	B78243	B77739	B78244	B76627RS
BVM4-60	6	3	B77471	B78246	B77869	B78248	B77511	B78247	B77891	B78249	B77740	B78250	B76628RS
BVM4-80/7	7	3	B77472	B78252	B77870	B78254	B77512	B78253	B77892	B78255	B77741	B78256	B76629RS
BVM4-80	8	3	B77473	B78258	B77871	B78260	B77513	B78259	B77893	B78261	B77742	B78262	B76630RS
BVM4-100	10	5	B77474	B78264	B77872	B78266	B77514	B78265	B77894	B78267	B77743	B78268	B76631RS
BVM4-120	12	5	B77475	B78270	B77873	B78272	B77515	B78271	B77895	B78273	B77744	B78274	B76632RS
BVM4-140	14	5	B77476	B78276	B77874	B78278	B77516	B78277	B77896	B78279	B77745	B78280	B76633RS
BVM4-160	16	7.5	B77477	B78282	B77875	B78284	B77517	B78283	B77897	B78285	B77746	B78286	B76634RS
BVM8-20/1	1	0.75	B77478	B78295	B77898	B78297	B77518	B78296	B77912	B78298	B77747	B78299	B76635RS
BVM8-20	2	1.5	B77479	B78301	B77899	B78303	B77519	B78302	B77913	B78304	B77748	B78305	B76636RS
BVM8-30	3	3	B77480	B78307	B77900	B78309	B77520	B78308	B77914	B78310	B77749	B78311	B76637RS
BVM8-40	4	3	B77481	B78313	B77901	B78315	B77521	B78314	B77915	B78316	B77750	B78317	B76638RS
BVM8-50	5	5	B77482	B78319	B77902	B78321	B77522	B78320	B77916	B78322	B77751	B78323	B76639RS
BVM8-60	6	5	B77483	B78325	B77903	B78327	B77523	B78326	B77917	B78328	B77752	B78329	B76640RS
BVM8-80	8	7.5	B77484	B78331	B77904	B78333	B77524	B78332	B77918	B78334	B77753	B78335	B76641RS
BVM8-100	10	7.5	B77485	B78337	B77905	B78339	B77525	B78338	B77919	B78340	B77754	B78341	B76642RS
BVM8-120	12	10	B77486	B78343	B77906	B78345	B77526	B78344	B77920	B78346	B77755	B78347	B76643RS
BVM8-140	14	10	B77487	B78349	B77907	B78351	B77527	B78350	B77921	B78352	B77756	B78353	B76644RS
BVM8-160	16	15					B78028	B78399	B78031	B78400	B78025	B78401	B78023RS
BVM16-30/2	2	5	B77488	B78355	B77908	B78357	B77492	B78356	B77922	B78358	B77757	B78359	B76645RS
BVM16-30	3	7.5	B77489	B78361	B77909	B78363	B77493	B78362	B77923	B78364	B77758	B78365	B76646RS
BVM16-40	4	7.5	B77490	B78367	B77910	B78369	B77494	B78368	B77924	B78370	B77759	B78371	B76647RS
BVM16-50	5	10	B77491	B78373	B77911	B78375	B77495	B78374	B77925	B78376	B77760	B78377	B76648RS
BVM16-60	6	15					B77496	B78379	B77926	B78380	B77761	B78381	B76649RS
BVM16-70	7	15					B77528	B78383	B77927	B78384	B77762	B78385	B76650RS
BVM16-80	8	15					B77529	B78387	B77928	B78388	B77763	B78389	B76651RS
BVM16-100	10	20					B77530	B78391	B77929	B78392	B77764	B78393	B76652RS
BVM16-120	12	25					B77531	B78395	B77930	B78396	B77765	B78397	B76653RS

1-1/4" Flanged or Threaded Connections on BVM Series 2 and 4.
2" Flanged or Threaded Connections on BVM Series 8 and 16.

VERTICAL MULTI-STAGE PUMPS

BVMI SERIES

304 STAINLESS STEEL CROSS REFERENCE

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

Complete Pump Assemblies			Single Phase Catalog Numbers				Three Phase 230/460V Catalog Numbers				Pump Ends		Pump Stacks
			O. D. P. Motor		T.E.F.C. Motor		O. D. P. Motor		T.E.F.C. Motor				
Series	Stages	HP	Flanged	Victaulic	Flanged	Victaulic	Flanged	Victaulic	Flanged	Victaulic	Flanged	Victaulic	Stack Only
BVMI2-30/2	2	0.5	B80712	B81454	B80735	B81477	B80758	B81500	B80781	B81523	B80804	B81546	B82227RS
BVMI2-30	3	0.75	B80713	B81455	B80736	B81478	B80759	B81501	B80782	B81524	B80805	B81547	B82228RS
BVMI2-40	4	1	B80714	B81456	B80737	B81479	B80760	B81502	B80783	B81525	B80806	B81548	B82229RS
BVMI2-50	5	1.5	B80715	B81457	B80738	B81480	B80761	B81503	B80784	B81526	B80807	B81549	B82230RS
BVMI2-60	6	1.5	B80716	B81458	B80739	B81481	B80762	B81504	B80785	B81527	B80808	B81550	B82231RS
BVMI2-70	7	2	B80717	B81459	B80740	B81482	B80763	B81505	B80786	B81528	B80809	B81551	B82232RS
BVMI2-80	8	2	B80718	B81460	B80741	B81483	B80764	B81506	B80787	B81529	B80810	B81552	B82233RS
BVMI2-100	10	3	B80719	B81461	B80742	B81484	B80765	B81507	B80788	B81530	B80811	B81553	B82234RS
BVMI2-120	12	3	B80720	B81462	B80743	B81485	B80766	B81508	B80789	B81531	B80812	B81554	B82235RS
BVMI2-150	15	5	B80721	B81463	B80744	B81486	B80767	B81509	B80790	B81532	B80813	B81555	B82236RS
BVMI2-180	18	5	B80722	B81464	B80745	B81487	B80768	B81510	B80791	B81533	B80814	B81556	B82237RS
BVMI4-20/1	1	0.5	B80723	B81465	B80746	B81488	B80769	B81511	B80792	B81534	B80815	B81557	B82238RS
BVMI4-20	2	0.75	B80724	B81466	B80747	B81489	B80770	B81512	B80793	B81535	B80816	B81558	B82239RS
BVMI4-30	3	1	B80725	B81467	B80748	B81490	B80771	B81513	B80794	B81536	B80817	B81559	B82240RS
BVMI4-40	4	1.5	B80726	B81468	B80749	B81491	B80772	B81514	B80795	B81537	B80818	B81560	B82241RS
BVMI4-50	5	2	B80727	B81469	B80750	B81492	B80773	B81515	B80796	B81538	B80819	B81561	B82242RS
BVMI4-60	6	3	B80728	B81470	B80751	B81493	B80774	B81516	B80797	B81539	B80820	B81562	B82243RS
BVMI4-80/7	7	3	B80729	B81471	B80752	B81494	B80775	B81517	B80798	B81540	B80821	B81563	B82244RS
BVMI4-80	8	3	B80730	B81472	B80753	B81495	B80776	B81518	B80799	B81541	B80822	B81564	B82245RS
BVMI4-100	10	5	B80731	B81473	B80754	B81496	B80777	B81519	B80800	B81542	B80823	B81565	B82246RS
BVMI4-120	12	5	B80732	B81474	B80755	B81497	B80778	B81520	B80801	B81543	B80824	B81566	B82247RS
BVMI4-140	14	5	B80733	B81475	B80756	B81498	B80779	B81521	B80802	B81544	B80825	B81567	B82248RS
BVMI4-160	16	7.5	B80734	B81476	B80757	B81499	B80780	B81522	B80803	B81545	B80826	B81568	B82249RS
BVMI8-20/1	1	0.75	B81882	B81746	B81950	B81774	B81910	B81802	B81978	B81842	B81666	B81706	B82187
BVMI8-20	2	1.5	B81883	B81747	B81951	B81775	B81911	B81803	B81979	B81843	B81667	B81707	B82188
BVMI8-30	3	3	B81884	B81748	B81952	B81776	B81912	B81804	B81980	B81844	B81668	B81708	B82189
BVMI8-40	4	3	B81885	B81749	B81953	B81777	B81913	B81805	B81981	B81845	B81669	B81709	B82190
BVMI8-50	5	5	B81886	B81750	B81954	B81778	B81914	B81806	B81982	B81846	B81670	B81710	B82191
BVMI8-60	6	5	B81887	B81751	B81955	B81779	B81915	B81807	B81983	B81847	B81671	B81711	B82192
BVMI8-80	8	7.5	B81888	B81752	B81956	B81780	B81916	B81808	B81984	B81848	B81672	B81712	B82193
BVMI8-100	10	7.5	B81889	B81753	B81957	B81781	B81917	B81809	B81985	B81849	B81673	B81713	B82194
BVMI8-120	12	10	B81890	B81754	B81958	B81782	B81918	B81810	B81986	B81850	B81674	B81714	B82195
BVMI8-140	14	10	B81891	B81755	B81959	B81783	B81919	B81811	B81987	B81851	B81675	B81715	B82196
BVMI8-160	16	15					B81920	B81812	B81988	B81852	B81676	B81716	B82197
BVMI16-30/2	2	5	B81892	B81756	B81960	B81784	B81921	B81813	B81989	B81853	B81677	B81717	B82198
BVMI16-30	3	7.5	B81893	B81757	B81961	B81785	B81922	B81814	B81990	B81854	B81678	B81718	B82199
BVMI16-40	4	7.5	B81894	B81758	B81962	B81786	B81923	B81815	B81991	B81855	B81679	B81719	B82200
BVMI16-50	5	10	B81895	B81759	B81963	B81787	B81924	B81816	B81992	B81856	B81680	B81720	B82201
BVMI16-60	6	15					B81925	B81817	B81993	B81857	B81681	B81721	B82202
BVMI16-70	7	15					B81926	B81818	B81994	B81858	B81682	B81722	B82203
BVMI16-80	8	15					B81927	B81819	B81995	B81859	B81683	B81723	B82204
BVMI16-100	10	20					B81928	B81820	B81996	B81860	B81684	B81724	B82205
BVMI16-120	12	25					B81929	B81821	B81997	B81861	B81685	B81725	B82206

1-1/4" Flanged or Threaded Connections on BVM Series 2 and 4.
2" Flanged or Threaded Connections on BVM Series 8 and 16.

VERTICAL MULTI-STAGE PUMPS

BVMX SERIES

316 STAINLESS STEEL CROSS REFERENCE

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TX. 77037
PHONE 281-445-8077
FAX 281-445-8557

Complete Pump Assemblies			Single Phase Catalog Numbers				Three Phase 230/460V Catalog Numbers				Pump Ends		Pump Stacks
			O. D. P. Motor		T.E.F.C. Motor		O. D. P. Motor		T.E.F.C. Motor				
Series	Stages	HP	Flanged	Victaulic	Flanged	Victaulic	Flanged	Victaulic	Flanged	Victaulic	Flanged	Victaulic	Stack Only
BVMX2-30/2	2	0.5	B81230	B81362	B81253	B81385	B81276	B81408	B81299	B81431	B81207	B81339	B82250RS
BVMX2-30	3	0.75	B81231	B81363	B81254	B81386	B81277	B81409	B81300	B81432	B81208	B81340	B82251RS
BVMX2-40	4	1	B81232	B81364	B81255	B81387	B81278	B81410	B81301	B81433	B81209	B81341	B82252RS
BVMX2-50	5	1.5	B81233	B81365	B81256	B81388	B81279	B81411	B81302	B81434	B81210	B81342	B82253RS
BVMX2-60	6	1.5	B81234	B81366	B81257	B81389	B81280	B81412	B81303	B81435	B81211	B81343	B82254RS
BVMX2-70	7	2	B81235	B81367	B81258	B81390	B81281	B81413	B81304	B81436	B81212	B81344	B82255RS
BVMX2-80	8	2	B81236	B81368	B81259	B81391	B81282	B81414	B81305	B81437	B81213	B81345	B82256RS
BVMX2-100	10	3	B81237	B81369	B81260	B81392	B81283	B81415	B81306	B81438	B81214	B81346	B82257RS
BVMX2-120	12	3	B81238	B81370	B81261	B81393	B81284	B81416	B81307	B81439	B81215	B81347	B82258RS
BVMX2-150	15	5	B81239	B81371	B81262	B81394	B81285	B81417	B81308	B81440	B81216	B81348	B82259RS
BVMX2-180	18	5	B81240	B81372	B81263	B81395	B81286	B81418	B81309	B81441	B81217	B81349	B82260RS
BVMX4-20/1	1	0.5	B81241	B81373	B81264	B81396	B81287	B81419	B81310	B81442	B81218	B81350	B82261RS
BVMX4-20	2	0.75	B81242	B81374	B81265	B81397	B81288	B81420	B81311	B81443	B81219	B81351	B82262RS
BVMX4-30	3	1	B81243	B81375	B81266	B81398	B81289	B81421	B81312	B81444	B81220	B81352	B82263RS
BVMX4-40	4	1.5	B81244	B81376	B81267	B81399	B81290	B81422	B81313	B81445	B81221	B81353	B82264RS
BVMX4-50	5	2	B81245	B81377	B81268	B81400	B81291	B81423	B81314	B81446	B81222	B81354	B82265RS
BVMX4-60	6	3	B81246	B81378	B81269	B81401	B81292	B81424	B81315	B81447	B81223	B81355	B82266RS
BVMX4-80/7	7	3	B81247	B81379	B81270	B81402	B81293	B81425	B81316	B81448	B81224	B81356	B82267RS
BVMX4-80	8	3	B81248	B81380	B81271	B81403	B81294	B81426	B81317	B81449	B81225	B81357	B82268RS
BVMX4-100	10	5	B81249	B81381	B81272	B81404	B81295	B81427	B81318	B81450	B81226	B81358	B82269RS
BVMX4-120	12	5	B81250	B81382	B81273	B81405	B81296	B81428	B81319	B81451	B81227	B81359	B82270RS
BVMX4-140	14	5	B81251	B81383	B81274	B81406	B81297	B81429	B81320	B81452	B81228	B81360	B82271RS
BVMX4-160	16	7.5	B81252	B81384	B81275	B81407	B81298	B81430	B81321	B81453	B81229	B81361	B82272RS
BVMX8-20/1	1	0.75	B81896	B81760	B81964	B81788	B81930	B81822	B81998	B81862	B81686	B81726	B82207
BVMX8-20	2	1.5	B81897	B81761	B81965	B81789	B81931	B81823	B81999	B81863	B81687	B81727	B82208
BVMX8-30	3	3	B81898	B81762	B81966	B81790	B81932	B81824	B82000	B81864	B81688	B81728	B82209
BVMX8-40	4	3	B81899	B81763	B81967	B81791	B81933	B81825	B82001	B81865	B81689	B81729	B82210
BVMX8-50	5	5	B81900	B81764	B81968	B81792	B81934	B81826	B82002	B81866	B81690	B81730	B82211
BVMX8-60	6	5	B81901	B81765	B81969	B81793	B81935	B81827	B82003	B81867	B81691	B81731	B82212
BVMX8-80	8	7.5	B81902	B81766	B81970	B81794	B81936	B81828	B82004	B81868	B81692	B81732	B82213
BVMX8-100	10	7.5	B81903	B81767	B81971	B81795	B81937	B81829	B82005	B81869	B81693	B81733	B82214
BVMX8-120	12	10	B81904	B81768	B81972	B81796	B81938	B81830	B82006	B81870	B81694	B81734	B82215
BVMX8-140	14	10	B81905	B81769	B81973	B81797	B81939	B81831	B82007	B81871	B81695	B81735	B82216
BVMX8-160	16	15					B81940	B81832	B82008	B81872	B81696	B81736	B82217
BVMX16-30/2	2	5	B81906	B81770	B81974	B81798	B81941	B81833	B82009	B81873	B81697	B81737	B82218
BVMX16-30	3	7.5	B81907	B81771	B81975	B81799	B81942	B81834	B82010	B81874	B81698	B81738	B82219
BVMX16-40	4	7.5	B81908	B81772	B81976	B81800	B81943	B81835	B82011	B81875	B81699	B81739	B82220
BVMX16-50	5	10	B81909	B81773	B81977	B81801	B81944	B81836	B82012	B81876	B81700	B81740	B82221
BVMX16-60	6	15					B81945	B81837	B82013	B81877	B81701	B81741	B82222
BVMX16-70	7	15					B81946	B81838	B82014	B81878	B81702	B81742	B82223
BVMX16-80	8	15					B81947	B81839	B82015	B81879	B81703	B81743	B82224
BVMX16-100	10	20					B81948	B81840	B82016	B81880	B81704	B81744	B82225
BVMX16-120	12	25					B81949	B81841	B82017	B81881	B81705	B81745	B82226

1-1/4" Flanged or Threaded Connections on BVM Series 2 and 4.
2" Flanged or Threaded Connections on BVM Series 8 and 16.

VERTICAL MULTI-STAGE PUMPS