


GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TEXAS 77037

GSS-61
0703

PHONE 281-445-8077


FAX 281-445-8557

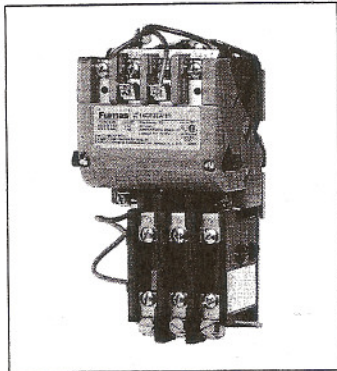


3 Phase, 3 Pole



Type 1

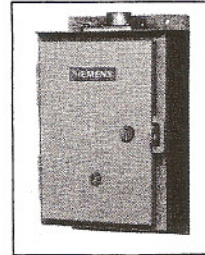

Type 3/3R

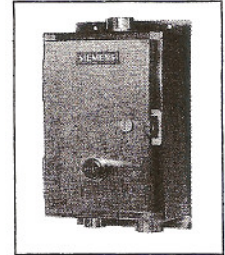

Type 4/4X

MAGNETIC STARTERS

SIEMENS/FURNAS HEAVY DUTY MOTOR STARTERS FOR THREE PHASE MOTORS
AMBIENT COMPENSATED BIMETAL OVERLOAD WITH MANUAL AND AUTO RESET.

3 PHASE-3 POLE STARTER----SPECIFY COIL VOLTAGE DESIRED

NEMA 1 ENCLOSURE (GENERAL PURPOSE) LISTED BELOW

PART #	NEMA SIZE	MAX. HP	MAX. HP
		ON 230 V.	ON 460 V.
14CP32BC-81-----	0-----	3-----	5-----
14DP32BC-81-----	1-----	7-1/2-----	10-----
14FP32BC-81-----	2-----	15-----	25-----
14HP32BC-81-----	3-----	30-----	50-----

(ADD K-STYLE QUICK TRIP HEATER PRICES TO MOTOR STARTER PRICES)

K - STYLE SIEMENS/FURNAS QUICK TRIP HEATERS-----

SIEMENS/FURNAS REPLACEMENT COILS FOR ABOVE STARTERS


75D73070J---FURNAS REPLACEMENT COIL 24 VOLT-----
75D73070A---FURNAS REPLACEMENT COIL 120/240 VOLT-----
75D73070C---FURNAS REPLACEMENT COIL 240/480 VOLT-----

OPTIONS AVAILABLE FOR MOTOR STARTERS:

1. NEMA 4/4X STAINLESS STEEL ENCLOSURE---WATERTIGHT, DUSTTIGHT, CORROSION RESISTANT 304 STAINLESS STEEL.
2. NEMA 3/3R ENCLOSURE-----INDUSTRIAL USE, WEATHERPROOF.
3. EXPLOSION PROOF ENCLOSURES.
4. HAND-OFF-AUTO (HOA) SWITCHES.
5. START-STOP BUTTON SWITCHES
6. SINGLE PHASE--2 POLE--230 VOLT MOTOR STARTERS.

PRESSURE SWITCHES

NEMA TYPE 1 ENCLOSURE FOR GENERAL PURPOSE WATER PUMP APPLICATION.
(SPECIAL PRESSURE SETTINGS CAN BE OPTIONAL FOR CERTAIN SWITCHES)

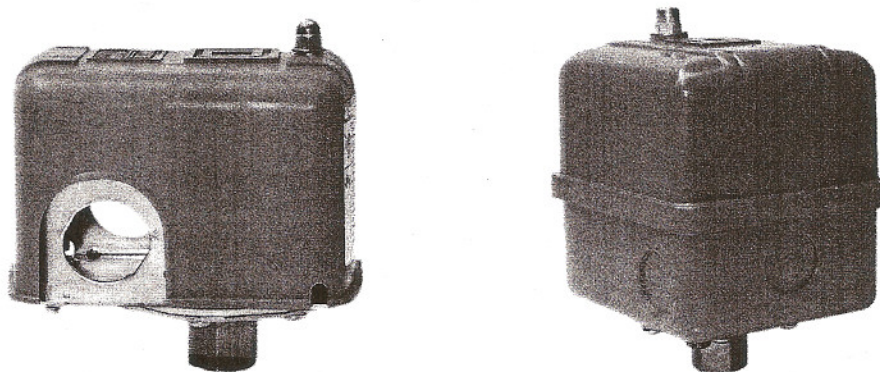

PART
NUMBER

FSG-2-3050-----1/4" LOWER CONNCTION-----
POINTS RATED UP TO 1-1/2 HP.
SET---ON AT 30 PSI AND OFF AT 50 PSI.


FSG-2-M1-3050----1/4" LOWER CONNCTION-----
ON-OFF LEVER ON SIDE OF SWITCH.
POINTS RATED UP TO 1-1/2 HP.
SET---ON AT 30 PSI AND OFF AT 50 PSI.

FSG-2-M4-3050----1/4" LOWER CONNECTION-----
ON-OFF LEVER ON SIDE OF SWITCH.
CONTAINS AUTOMATIC LOW PRESSURE CUT-OFF FEATURE.
POINTS RATED UP TO 1-1/2 HP.
SET---ON AT 30 PSI AND OFF AT 50 PSI.

FYG-2-3050-----1/4" LOWER CONNECTION-----
POINTS RATED UP TO 2 HP.
SET---ON AT 30 PSI AND OFF AT 50 PSI.

GSG-2-3050-----1/4" LOWER CONNECTION-----
POINTS RATED UP TO 3 HP.
SET---ON AT 30 PSI AND OFF AT 50 PSI.

PRESSURE SWITCH NEMA 4 RATED ENCLOSURE

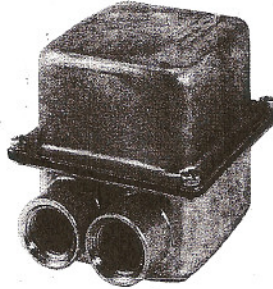


WATER SYSTEM PRESSURE SWITCH---NEMA 4 RATED
NEMA 4---WATERTIGHT APPLICATION
STANDARD PSI SWITCH SETTINGS AVAILABLE

MODEL

69WB5W.....1/4" FEMALE IRON PIPE THREAD CONNECTION.....
POINTS RATED UP TO 2 HP FOR 230 VOLT

PRESSURE SNUBBER

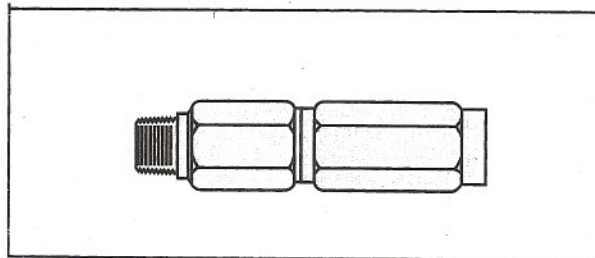

MODEL

010B-RAY.....BRASS PRESSURE SNUBBER.....
BRASS 1/4" IRON PIPE THREAD CONNECTIONS
MOUNT PRESSURE SWITCH, GAUGE, RECORDERS, OR CONTROLS ON TOP
OF THE SNUBBER. THE SNUBBER WILL ABSORB THE SUDDEN SHOCK OR
JAR AND NOT LET SWITCH OR ETC. SENSE THIS HIGH SUDDEN SHOCK.
(AVAILABLE IN STAINLESS STEEL UPON SPECIAL REQUEST)

MODEL

1530-S6G1.....PLASTIC PULSATION PLUG.....
FOR 1/4" FEMALE IRON PIPE THREAD