

GULF SOUTH SUPPLY INC.
7721 AIRLINE DR.
HOUSTON, TEXAS 77037
PHONE: 281-445-8077 FAX: 281-445-8557

GSS-66

1105



BRONZE FOOT VALVES

BRONZE SPRING LOADED FOOT VALVES

MAX. WORKING PRESSURE....200 PSI

MAX. OPERATING TEMP....175

VALVES HAVE A BUNA-N O'RING

<u>PART #</u>	<u>SIZE</u>	
BR75.....	3/4"	BRONZE FOOT VALVE.....
BR100.....	1"	BRONZE FOOT VALVE.....
BR125**.....	1 1/4"	BRONZE FOOT VALVE.....
(** SPECIAL VALVE....WILL ENTER 2" I.D. PIPE)		
BR150.....	1 1/2"	BRONZE FOOT VALVE.....
BR200.....	2"	BRONZE FOOT VALVE.....
BR300.....	3"	BRONZE FOOT VALVE.....
BR400.....	4"	BRONZE FOOT VALVE.....

COMBINATION

PLASTIC FOOT & CHECK VALVES

PLASTIC COMBINATION FOOT VALVE & CHECK VALVE

MAX. PRESSURE...150 PSI

MAX. TEMPERATURE...150 F

BUNA-N SEAL.....STAINLESS STEEL SPRING

<u>PART#</u>	<u>SIZE</u>	
FV75.....	3/4"	FOOT VALVE/CHECK VALVE COMBO.....
FV100.....	1"	FOOT VALVE/CHECK VALVE COMBO.....
FV125.....	1 1/4"	FOOT VALVE/CHECK VALVE COMBO.....
FV150.....	1 1/2"	FOOT VALVE/CHECK VALVE COMBO.....

STAINLESS STEEL FOOT VALVES

STAINLESS STEEL SPRING LOADED FOOT VALVES

STAINLESS STEEL SPRING, WASHER, & LOCKNUT

304 STAINLESS STEEL WITH VITON O'RING

RATED TO 200 PSI

<u>PART#</u>	<u>SIZE</u>	
SSFV50.....	1/2"	STAINLESS STEEL FOOT VALVE.....
SSFV75.....	3/4"	STAINLESS STEEL FOOT VALVE.....
SSFV100.....	1"	STAINLESS STEEL FOOT VALVE.....
SSFV125.....	1 1/4"	STAINLESS STEEL FOOT VALVE.....
SSFV150.....	1 1/2"	STAINLESS STEEL FOOT VALVE.....
SSFV200.....	2"	STAINLESS STEEL FOOT VALVE.....
SSFV300.....	3"	STAINLESS STEEL FOOT VALVE.....
SSFV400.....	4"	STAINLESS STEEL FOOT VALVE.....

GULF SOUTH SUPPLY INC.
7721 AIRLINE DR.
HOUSTON, TEXAS 77037

PHONE: 281-445-8077

FAX: 281-445-8557

GSS-66

PAGE 2

1105




CAST IRON FOOT VALVES

CAST IRON FLAPPER STYLE FOOT VALVES
FEMALE NPT----LEATHER FLAPPER CHECK

PART

FV25B	2 INCH CAST IRON FOOT VALVE
FV35B	3 INCH CAST IRON FOOT VALVE
FV40B	4 INCH CAST IRON FOOT VALVE
FV60B	6 INCH CAST IRON FOOT VALVE
FV80B	8 INCH CAST IRON FOOT VALVE



BRONZE CHECK VALVES

BRONZE SPRING LOADED LINE CHECK VALVE
MAX. WORKING PRESSURE-----200PSI.
MAX. WORKING TEMPERATURE-----175 F.
THREADED FEMALE CONNECTIONS

PART

101-303	1/2"	BRONZE LINE CHECK VALVE
101-304	3/4"	BRONZE LINE CHECK VALVE
4031E	1"	BRONZE LINE CHECK VALVE
4032E	1 1/4"	BRONZE LINE CHECK VALVE
4033E	1 1/2"	BRONZE LINE CHECK VALVE
4034E	2"	BRONZE LINE CHECK VALVE
4035E	2 1/2"	BRONZE LINE CHECK VALVE
4036E	3"	BRONZE LINE CHECK VALVE
4037E	4"	BRONZE LINE CHECK VALVE

GULF SOUTH SUPPLY INC.

7721 AIRLINE DR.

HOUSTON, TEXAS 77037


PHONE: 281-445-8077

FAX: 281-445-8557

GSS-66

PG-3

0505

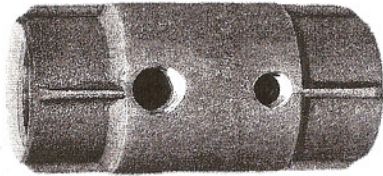

BRONZE CHECK VALVES DOUBLE TAPPED

BRONZE SPRING LOADED DOUBLE TAPPED CHECK VALVE


MAXIMUM WORKING PRESSURE.....200 PSI

MAXIMUM WORKING TEMPERATURE.....175 F

VALVES ARE FEMALE X FEMALE NPT WITH TWO DRILLED AND TAPPED HOLES

1/8" NPT ON INLET SIDE.....1/4" NPT ON OUTLET SIDE

<u>PART #</u>	<u>SIZE</u>	
4051E	1"	BRONZE D.T. CHECK VALVE
4052E	1 1/4"	BRONZE D.T. CHECK VALVE
4053E	1 1/2"	BRONZE D.T. CHECK VALVE
4054E	2"	BRONZE D.T. CHECK VALVE




PLASTIC CHECK VALVES

PVC SWING CHECK VALVES

SLIP X SLIP CONNECTIONS

RATED TO 90 PSI

<u>PART #</u>	<u>SIZE</u>	
1520 - 15	1 1/2"	PVC SWING CHECK VALVE
1520 - 20	2"	PVC SWING CHECK VALVE
1520 - 30	3"	PVC SWING CHECK VALVE
1520 - 40	4"	PVC SWING CHECK VALVE

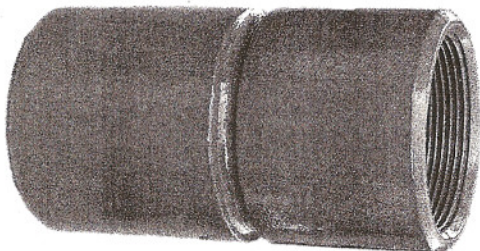

HEAVY DUTY DUCTILE IRON CHECK VALVES

DUCTILE IRON SPRING LOADED CHECK VALVES
FEMALE NPT X FEMALE NPT THREADED CONNECTIONS


MAXIMUM WORKING PRESSURE.....300 PSI

MAXIMUM WORKING TEMPERATURE.....175 F

<u>PART #</u>	<u>SIZE</u>	
DICV20	2"	DUCTILE IRON CHECK VALVE
DICV25	2 1/2"	DUCTILE IRON CHECK VALVE
DICV30	3"	DUCTILE IRON CHECK VALVE
DICV40	4"	DUCTILE IRON CHECK VALVE
DICV50	5"	DUCTILE IRON CHECK VALVE
DICV60	6"	DUCTILE IRON CHECK VALVE

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TEXAS 77037
PHONE 281-445-8077 FAX 281-445-8557

GSS-67A
0104

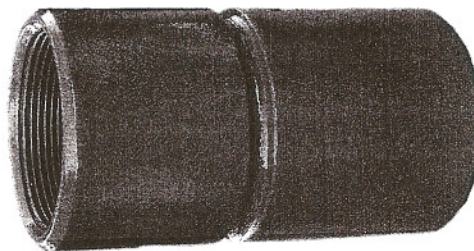

STAINLESS STEEL CHECK VALVES

STAINLESS STEEL SPRING LOADED LINE CHECK VALVES

MAX. WORKING PRESSURE-----350 PSI


MAX. WORKING TEMPERATURE----175 F

(FEMALE THREAD X FEMALE THREAD CONNECTION)

STYLE 80/100SS HAS A BUNA N SEAL

STYLE 80S6 HAS A VITON SEAL.

PART #	SIZE	STYLE
4201SS2-----1	INCH---303 S.S.	CHECK VALVE---80/100SS---
4202SS2---1-1/4	INCH---303 S.S.	CHECK VALVE---80/100SS---
4033SS2---1-1/2	INCH---303 S.S.	CHECK VALVE---80/100SS---
4034SS2-----2	INCH---303 S.S.	CHECK VALVE---80/100SS---
7938S6-----3	INCH---316 S.S.	CHECK VALVE---80S6-----
7939S6-----4	INCH---316 S.S.	CHECK VALVE---80S6-----
4089S6-----6	INCH---316 S.S.	CHECK VALVE---80S6-----

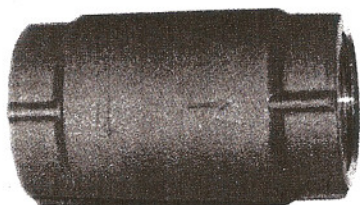

STAINLESS STEEL CHECK VALVES

STAINLESS STEEL SPRING LOADED LINE CHECK VALVES


304 STAINLESS STEEL WITH VITON O'RING

RATED UP TO 200 PSI.

PART #	SIZE	STYLE
SSCV50-----1/2	INCH---304 S.S.	CHECK VALVE-----
SSCV75-----3/4	INCH---304 S.S.	CHECK VALVE-----
SSCV100-----1	INCH---304 S.S.	CHECK VALVE-----
SSCV125-----1-1/4	INCH---304 S.S.	CHECK VALVE-----
SSCV150-----1-1/2	INCH---304 S.S.	CHECK VALVE-----
SSCV200-----2	INCH---304 S.S.	CHECK VALVE-----
SSCV300-----3	INCH---304 S.S.	CHECK VALVE-----
SSCV400-----4	INCH---304 S.S.	CHECK VALVE-----

GULF SOUTH SUPPLY INC
7721 AIRLINE DRIVE
HOUSTON, TEXAS 77037
PHONE 281-445-8077

GSS-67
0701
FAX 281-445-8557

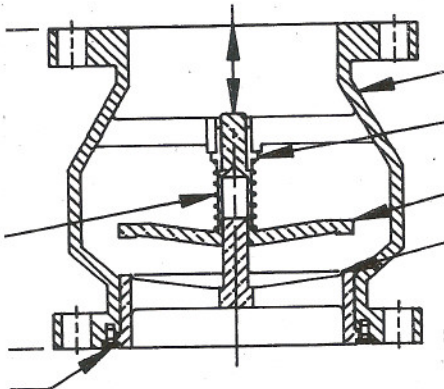

Globe Style Silent Check Valve

When There is a Risk of
Water Hammer


DOUBLE GUIDED

SILENT CHECK VALVE
GLOBE STYLE---402BTR

CAST IRON BODY---NITRILE BUNA N SEAL
FLANGED CONNECTION ANSI 125
BRONZE TRIM
MAX. WORKING PRESSURE---200 PSI
MAX. OPERATING TEMPERATURE---170 F



<u>PART #</u>	<u>SIZE</u>		<u>APPROX.</u> <u>WEIGHT</u>
2239BTR----	2"	FLANGED CHECK VALVE----	15 LBS-----
2240BTR----	2-1/2"	FLANGED CHECK VALVE----	20 LBS-----
2241BTR----	3"	FLANGED CHECK VALVE----	25 LBS-----
2242BTR----	4"	FLANGED CHECK VALVE----	43 LBS-----
2243BTR----	5"	FLANGED CHECK VALVE----	55 LBS-----
2244BTR----	6"	FLANGED CHECK VALVE----	80 LBS-----
2245BTR----	8"	FLANGED CHECK VALVE----	120 LBS-----

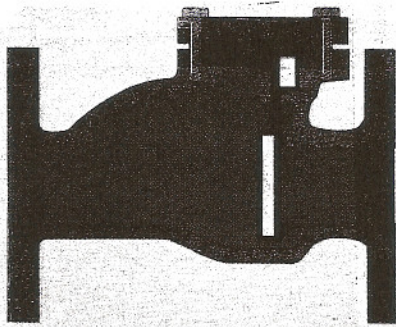

**Easy In-Line
Serviceability**

Non-Clog Full Port

Long Life Rubber Disc


SWING CHECK VALVE
NON-CLOG FULL PORT---STYLE 78

Swing Check

CAST IRON BODY---LONG LIFE RUBBER DISC
NEOPRENE ENCAPSULATED DISC W/ O'RING SEAL
FLANGED CONNECTION ANSI 125
MAX. WORKING PRESSURE---200 PSI.
MAX. OPERATING TEMPERATURE---135 F
IN-LINE SERVICEABILITY

<u>PART#</u>	<u>SIZE</u>		<u>APPROX.</u> <u>WEIGHT</u>
2182-----	3"	HEAVY DUTY SWING CHECK----	40 LBS-----
2183-----	4"	HEAVY DUTY SWING CHECK----	50 LBS-----
2185-----	6"	HEAVY DUTY SWING CHECK----	110 LBS-----
2186-----	8"	HEAVY DUTY SWING CHECK----	180 LBS-----


CAST IRON SWING CHECK VALVES



CAST IRON "McDONALD" SWING CHECK VALVES
 STANDARD DUTY-----FEMALE THREADED CONNECTIONS
 CAST IRON BODY WITH BRASS WORKING PARTS.
 BUNA N RUBBER DISC----MAX. OPERATING PRESSURE 125 PSI.

<u>MODEL</u>	<u>SIZE</u>	
6814-117----	1	INCH---THREADED CHECK VALVE-----
6814-118----	1-1/4	INCH---THREADED CHECK VALVE-----
6814-119----	1-1/2	INCH---THREADED CHECK VALVE-----
6814-120----	2	INCH---THREADED CHECK VALVE-----

CAST IRON SWING CHECK VALVES

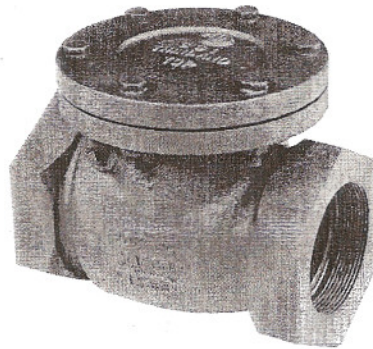

CAST IRON SWING CHECK VALVE
 STANDARD DUTY-----FEMALE THREADED CONNCTIONS
 EPOXY COATED---RESILIENT SEAT---BUNA N RUBBER DISC
 RATED TO 200 PSI


<u>MODEL</u>	<u>SIZE</u>		<u>WEIGHT</u> <u>LBS.</u>
120S08----	2	INCH---THREADED CHECK VALVE-----	13--
120S09----	2-1/2	INCH---THREADED CHECK VALVE-----	17--
120S10----	3	INCH---THREADED CHECK VALVE-----	26--
120S11----	4	INCH---THREADED CHECK VALVE-----	52--
120S12----	5	INCH---THREADED CHECK VALVE-----	68--
120S13----	6	INCH---THREADED CHECK VALVE-----	99--

GULF SOUTH SUPPLY INC.
7721 AIRLINE DRIVE
HOUSTON, TEXAS 77037
PHONE 281-445-8077

GSS-4G
PAGE 2
0704

FAX 281-445-8557


CAST IRON SWING CHECK VALVES

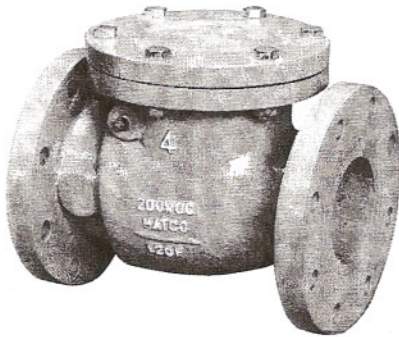

CAST IRON SWING CHECK VALVE.

FLANGED ENDS---RESILIENT SEAT.
EPOXY COATED
BUNA N DISC SEAT
RATED TO 200 PSI.

<u>MODEL</u>	<u>SIZE</u>	<u>WEIGHT</u> <u>LBS.</u>
12OF08----	2 INCH---FLANGED CHECK VALVE-----	23-----
12OF10----	3 INCH---FLANGED CHECK VALVE-----	45-----
12OF11----	4 INCH---FLANGED CHECK VALVE-----	70-----
12OF13----	6 INCH---FLANGED CHECK VALVE-----	120-----
12OF14----	8 INCH---FLANGED CHECK VALVE-----	240-----

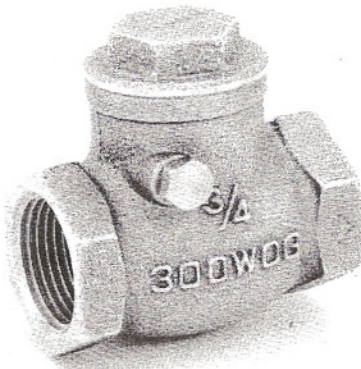

BRONZE CHECK VALVES

BRONZE SWING CHECK VALVE
FEMALE THREADED CONNCETIONS
BRONZE TO BRONZE SEAT
RATED TO 300 PSI WOG

<u>MODEL</u>	<u>SIZE</u>	
53TO2----	3/8	INCH-----530 SERIES-----
53TO3----	1/2	INCH-----530 SERIES-----
53TO4----	3/4	INCH-----530 SERIES-----
53TO5----	1	INCH-----530 SERIES-----
53TO6----	1-1/4	INCH-----530 SERIES-----
53TO7----	1-1/2	INCH-----530 SERIES-----
53TO8----	2	INCH-----530 SERIES-----
53TO9----	2-1/2	INCH-----530 SERIES-----
53TO10----	3	INCH-----530 SERIES-----
53TO11----	4	INCH-----530 SERIES-----