

BRASS RELIEF VALVES LIGHT DUTY SERIES


<u>PART #</u>			<u>SETTING</u>
RV-50.....	1/2"	RELIEF VALVE.....	75 PSI.....
RV-75.....	3/4"	RELIEF VALVE.....	75 PSI.....



BRASS RELIEF VALVES STANDARD DUTY SERIES

STANDARD DUTY SERIES
PRESSURE LIMIT = 120 PSI FOR LIQUID (WATER) SERVICE
COMPOSITION DISC ON BRASS SEAT
MAXIMUM TEMPERATURE = 180 F.

<u>PART #</u>			<u>SETTING</u>	<u>MAX FLOW@ 120 PSI</u>
HRV75.....	3/4"	RELIEF VALVE.....	75 PSI.....	25 GPM.....
SRV-140.....	1"	RELIEF VALVE.....	75 PSI.....	37 GPM.....
SRV-142.....	1 1/4"	RELIEF VALVE.....	65 PSI.....	51 GPM.....
SRV-144.....	1 1/2"	RELIEF VALVE.....	65 PSI.....	70 GPM.....
SRV-146.....	2"	RELIEF VALVE.....	65 PSI.....	80 GPM.....

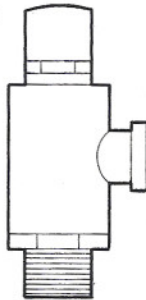


BRASS RELIEF VALVES HEAVY DUTY SERIES


PRESSURE LIMIT—300 PSI FOR LIQUID SERVICE
 TEMPERATURE LIMIT—300 F
 SERIES #20—SPECIFY SETTING

STYLE

20D.....	3/4"	HEAVY DUTY RELIEF VALVE.....
20E.....	1"	HEAVY DUTY RELIEF VALVE.....
20F.....	1 1/4"	HEAVY DUTY RELIEF VALVE.....
20G.....	1 1/2"	HEAVY DUTY RELIEF VALVE.....
20H.....	2"	HEAVY DUTY RELIEF VALVE.....
20J.....	2 1/2"	HEAVY DUTY RELIEF VALVE.....
20K.....	3"	HEAVY DUTY RELIEF VALVE.....



MALE INLET
PLAIN OUTLET



FEMALE INLET
PLAIN OUTLET

BRASS FLIP & FLOAT VALVES STANDARD DUTY—STANDARD LEVER

MODEL	SIZE	ARM-TAPPED	INLET-TAPPED	FLOWS TO
109804.....	3/4"	1/4" - 20.....	MALE.....	17 GPM.....
109805.....	1"	5/16" - 18.....	FEMALE.....	29 GPM.....
109806.....	1 1/4"	3/8" - 16.....	FEMALE.....	40 GPM.....
109807.....	1 1/2"	3/8" - 16.....	FEMALE.....	48 GPM.....
109808.....	2"	3/8" - 16.....	FEMALE.....	60 GPM.....

GULF SOUTH SUPPLY INC.
 7721 AIRLINE DR.
 HOUSTON, TEXAS 77037
 PHONE: 281-445-8077 FAX: 281-445-8557


GSS-89
 0106



BRASS FLIP-N-FLOAT VALVES HEAVY DUTY—COMPOUND LEVER

DISCHARGE OUTLET IS TAPPED FEMALE THREAD
 ADJUSTING ARM TAPPED $\frac{1}{4}$ "-20 BOLT THREAD

SIZE	PART #	FLOWS TO	TAPPED
1 $\frac{1}{4}$ "	R600-1 $\frac{1}{4}$ "	75 GPM	1 $\frac{1}{4}$ "
1 $\frac{1}{2}$ "	R600-1 $\frac{1}{2}$ "	85 GPM	1 $\frac{1}{2}$ "
(1 $\frac{1}{4}$ " VALVE—FLOW CAPACITY AT 85 PSI = 90 GPM)			
(1 $\frac{1}{2}$ " VALVE—FLOW CAPACITY AT 85 PSI = 105 GPM)			

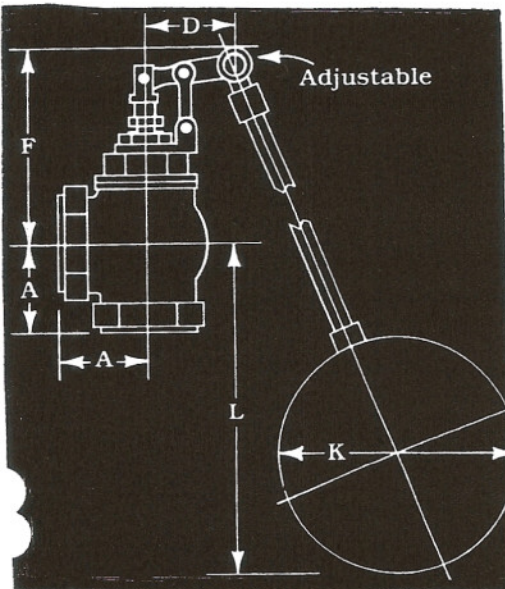


BRASS FLIP-N-FLOAT VALVE 3 INCH SIZE---HEAVY DUTY

HEAVY DUTY INDUSTRIAL ANGLE VALVE COMPLETE
 WITH BRASS PIPE ROD AND COPPER FLOAT
 (FOR WATER SERVICE UP TO 170 F)


3" NPT.....PART # ACF.....
 FLOW CAPACITY 400 GPM AT 55 PSI
 MAXIMUM INLET PRESSURE = 75 PSI

COPPER FLOAT BALL SIZE = 8 INCH O.D.
 BRASS PIPE ROD SIZE = $\frac{3}{8}$ " IPS X 24" LONG

A DIMENSION = 3 $\frac{3}{4}$ " K DIMENSION = 8"
 D DIMENSION = 3 $\frac{1}{4}$ " L DIMENSION = 20"
 F DIMENSION = 7"



A. O. SMITH MOTOR CENTRIFUGAL SWITCH
 PART # = 614234



A. O. SMITH MOTOR ROTATING GOVERNOR
 PART # = 601079