


GULF SOUTH SUPPLY, INC.
7721 AIRLINE DRIVE
HOUSTON, TEXAS 77037

PHONE (281) 445-8077

FAX (281) 445-8557

GSS-JAY
PAGE 1
1102

ALL PVC FILTER SCREEN

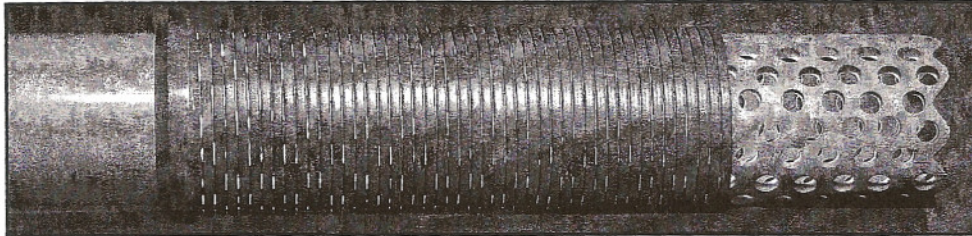

WRAPPED ON PIPE WELL SCREENS----MANUFACTURED ON
SCHEDULE 80 OR SCHEDULE 40 PVC PIPE BASE TO ASTM
STANDARDS. ROUND HOLES ARE PRECISELY PLACED TO
ALLOW MAXIMUM INLET AREA, AS WELL AS MAINTAIN PIPE
STRENGTH. DEFINITE KEYSTONE SHAPED SELF-CLEANING
WIRE FOR MAXIMUM FLOW AND FRICTION REDUCTION.



WOP-80 SCREENS

WOP-80 (PVC WIRE WRAPPED SCREEN ON SCH.80 BASE PVC PIPE)
AVAILABLE IN 10 FOOT LENGTHS AS STANDARD
SCREEN SIZES AVAILABLE----.004" THRU .100"

SIZE

2"-----WRAPPED ON PIPE SCH.80 SCREEN-----
2-1/2"---WRAPPED ON PIPE SCH.80 SCREEN-----
3"-----WRAPPED ON PIPE SCH.80 SCREEN-----
4"-----WRAPPED ON PIPE SCH.80 SCREEN-----

WOP-40 SCREENS

WOP-40 (PVC WIRE WRAPPED SCREEN ON SCH.40 BASE PVC PIPE)
AVAILABLE IN 10 FOOT LENGTHS AS STANDARD
SCREEN SIZES AVAILABLE----.004 THRU .100"

SIZE

2"-----WRAPPED ON PIPE SCH.40 SCREEN-----
2-1/2"---WRAPPED ON PIPE SCH.40 SCREEN-----
3"-----WRAPPED ON PIPE SCH.40 SCREEN-----
4"-----WRAPPED ON PIPE SCH.40 SCREEN-----
5"-----WRAPPED ON PIPE SCH.40 SCREEN-----
6"-----WRAPPED ON PIPE SCH.40 SCREEN-----
8"-----WRAPPED ON PIPE SCH.40 SCREEN-----
10"-----WRAPPED ON PIPE SCH.40 SCREEN-----

GULF SOUTH SUPPLY INC
7721 AIRLINE DR
HOUSTON, TEXAS 77037

PHONE 281-445-8077

FAX 281-445-8557

GSS-JAY
PAGE 2
0503

PVC SLOTTED WELL SCREEN

PVC SLOTTED SCREENS DO NOT RUST OR ROT AND THEY RESIST CHEMICAL ATTACK BY MOST ACIDS, ALKALIES, AND SALTS. PVC SLOTTED SCREENS ALSO HAVE A RESISTANCE TO IRON BACTERIA.

PVC SLOTTED SCREENS ON SCH.40 BASE PVC PIPE
AVAILABLE IN 10 FOOT LENGTHS ONLY
SCREEN SIZES AVAILABLE-----.006" THRU .100"

<u>SIZE</u>	
1-1/4	INCH DIAMETER SLOTTED SCREEN----
2	INCH DIAMETER SLOTTED SCREEN----
2-1/2	INCH-----
3	INCH-----
4	INCH-----
5	INCH-----
6	INCH-----
8	INCH-----
10	INCH-----
12	INCH-----



STAINLESS STEEL PIPE BASE SCREENS




STAINLESS STEEL PIPE BASE SCREENS

2 INCH STAINLESS STEEL PIPE BASE SCREEN.
STAINLESS STEEL WIRE WRAPPED ON PERFORATED GALVANIZED SCH.40 PIPE.
THIS SCREEN HAS 2 INCH MALE NPT ON EACH END.
SCREEN SIZES AVAILABLE-----.004" THRU .100"

2-1/2 INCH STAINLESS STEEL PIPE BASE SCREEN
STAINLESS STEEL WIRE WRAPPED ON PERFORATED GALVANIZED SCH.40 PIPE.
THIS SCREEN HAS 2-1/2 INCH MALE NPT ON EACH END.
SCREEN SIZES AVAILABLE-----.004" THRU .100"

**COMBINATION WASH BACK & BACK PRESSURE VALVES
BALL STYLE OF BACK PRESSURE VALVE
TYPICALLY USED ON BOTTOM OF WELL SCREEN**



**PLASTIC BACK PRESSURE VALVE
CAGE TYPE
ROUND BALL STYLE**

<u>P/N</u>	<u>SIZE</u>
20BPV.....	2".....
25BPV.....	2 1/2".....
30BPV.....	3".....
40BPV.....	4".....

**BRONZE BACK PRESSURE VALVE
CAGE TYPE WITH STEEL SPRING
ROUND CHROME PLATED BALL**


<u>P/N</u>	<u>SIZE</u>
BPV020X0B.....	2".....
BPV025X0B.....	2 1/2".....
BPV030X0B.....	3".....

**BRONZE BACK PRESSURE VALVE WITH LEFT HAND THREADED WASHBACK
CAGE TYPE WITH CHROME PLATED BALL AND STEEL SPRING
LEFT HAND THREADED WASHBACK CONNECTION**

<u>P/N</u>	<u>SIZE</u>
BPV020X1B.....	2" X 1".....BPV WITH WASHBACK CONNECTION.....
BPV025X1B.....	2 1/2" X 1".....BPV WITH WASHBACK CONNECTION.....
BPV030X1B.....	3" X 2".....BPV WITH WASHBACK CONNECTION.....


RUBBER FORMATION PACKERS WITH STAINLESS STEEL CLAMP

THIS PACKER OR SHALE TRAP IS USED TO SEAL OFF BETWEEN THE BORE HOLE SIZE AND THE CASING TO KEEP ABOVE FORMATIONS FROM FALLING OFF INTO THE PRODUCING ZONE.

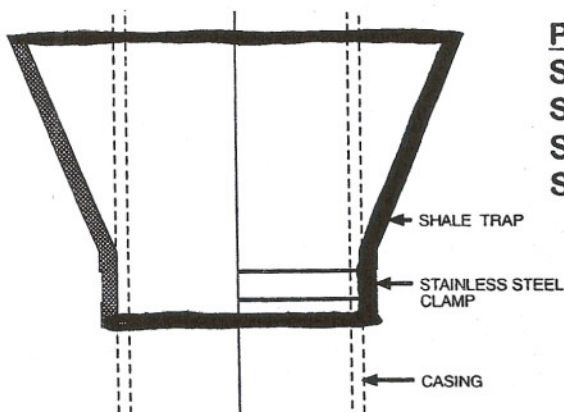

<u>P/N</u>	<u>CASING SIZE</u>	<u>BOREHOLE SIZE</u>
STSTD25.....	2".....	5".....
STSTD47.....	4".....	7".....
STSUP58.....	5".....	8".....
STSTD610.....	6".....	10".....


**COMBINATION WASH BACK & BACK PRESSURE VALVE
FLAT TYPE WITH STEEL BOLT, WASHER & SPRING**



FLAT BACK PRESSURE VALVE

SAME APPLICATION AND FUNCTION AS BALL
BACK PRESSURE VALVE. HAS SPRING
LOADED FLAP INSTEAD OF SPRING LOADED
BALL.

<u>PART #</u>	<u>SIZE</u>	<u>MATERIAL</u>
BPV040X0B	4"	BRONZE - FLAT BPV
BPV040X2B	4" X 2"	BRONZE - FLAT BPV
(ABOVE BPV HAS 2" LEFT HAND THREADED WASH BACK CONNECTION)		
BPV060X0B	6"	BRONZE - FLAT BPV
BPV060X0I	6"	IRON - FLAT BPV
BPV080X0B	8"	BRONZE - FLAT BPV
BPV080X0I	8"	IRON - FLAT BPV
BPV100X0B	10"	BRONZE - FLAT BPV
BPV100X0I	10"	IRON - FLAT BPV



**COMBINATION PVC SAND SHARK AND BACK PRESSURE VALVE
(FLOATING BALL STYLE)**

<u>PART #</u>	<u>SIZE</u>
20SS-BE	2" PVC SAND SHARK -- BELLED END
20SS-PE	2" PVC SAND SHARK -- PLAIN END
4X2-SBR	4"X 2" PVC SWEDGE BELL REDUCER



TRI-SEAL K-PACKERS

K-Packers are used to seal between the liner pipe above the screen And the casing, or to make a rubber slip seal between any two Pipes. These packers require no expanding or swedging in order To set and seal. The rubber for these packers is molded on both Right hand x right hand threaded couplings and right hand x left Hand threaded couplings. This is a steel body coupling with rubber Seal rings. Most k-packers have 3 rubber ring seals.

CASING SIZE X COUPLING SIZE	P/N	COUPLING STYLE
2"..... X 1 1/4"	KPRR1142	RIGHT X RIGHT
3"..... X 2"	KPRR23	RIGHT X RIGHT
4"..... X 2"	KPRR24	RIGHT X RIGHT
4"..... X 2 1/2"	KPRR2124	RIGHT X RIGHT
5"..... X 2 1/2" (SDR-17)	KPRR2112-SDR17..	RIGHT X RIGHT
5"..... X 2 1/2"	KPRR2125	RIGHT X RIGHT
5"..... X 3"	KPRR35	RIGHT X RIGHT
6"..... X 4"	KPRR46	RIGHT X RIGHT
8"..... X 6"	KPRR68	RIGHT X RIGHT
10"..... X 6"	KPRR610	RIGHT X RIGHT
4"..... X 2"	KPRL24	RIGHT X LEFT
4"..... X 2 1/2"	KPRL2124	RIGHT X LEFT
5"..... X 2 1/2" (SDR-17)	KPRL2125-SDR17..	RIGHT X LEFT
5"..... X 2 1/2"	KPRL2125	RIGHT X LEFT
5"..... X 3"	KPRL35	RIGHT X LEFT
6"..... X 4"	KPRL46	RIGHT X LEFT

PVC K-PACKERS

THESE K-PACKERS HAVE A PVC BODY WITH RUBBER RING SEALS

4"..... X 2"	SLIP X FEMALE THREADS.....
4"..... X 2 1/2"	SLIP X FEMALE THREADS

SUPER RUBBER SEALS

4"..... X 2 1/2"	MOLDED ON R X L OR R X R COUPLING
5"..... X 3"	MOLDED ON R X L OR R X R COUPLING
6"..... X 4"	MOLDED ON R X L OR R X R COUPLING

ROTARY SHOE (STEEL SAW TOOTH NIPPLE)

INSTALLED ON BOTTOM OF SCREEN, USUALLY IN DOUBLE STRING SETTING (ROTARY RIG). PREVENTS SCREEN FROM ROTATING WHEN RELEASING LEFT HAND THREAD IN PACKER SEAL WITH RIGHT AND LEFT HAND NIPPLE.



SAW TOOTH
NIPPLE

ROTARY SHOE (STEEL SAW TOOTH NIPPLE)

P/N		
20SRS-----	2"	ROTARY SHOE---
25SRS-----	2-1/2"	ROTARY SHOE---
30SRS-----	3"	ROTARY SHOE---
40SRS-----	4"	ROTARY SHOE---
50SRS-----	5"	ROTARY SHOE---



RIGHT X LEFT HAND
STEEL THREADED NIPPLES


SIZE	P/N
1"-----	100RXLN-----
1-1/4"----	125RXLN-----
2"-----	200RXLN-----
2-1/2"----	250RXLN-----
3"-----	300RXLN-----
4"-----	400RXLN-----



R&L THREADED
COUPLINGS

RIGHT X LEFT HAND
STEEL THREADED COUPLINGS

SIZE	
1-1/4"----	
2"-----	
2-1/2"----	
3"-----	
4"-----	



Vent Pipe Features:

- Fabricated from 1/2" heavy duty galvanized steel.
- Includes brass bug screen.
- Use for ventilating wells directly to atmosphere.

AIR VENT PIPES

STYLE

VP-50----1/2" STEEL CURVED VENT PIPE-----
(1/2" MALE NPT)