


T-STYLE SPIN DOWN FILTER IN-LINE SEDIMENT WATER FILTER

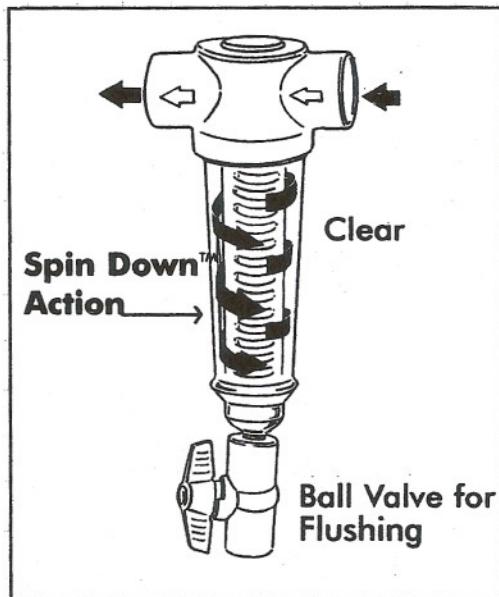

WITH STAINLESS STEEL SCREEN INSERT

MODEL # NT200-140SSP

2" INLINE FILTER (SLIP X SLIP)
(140 MESH = 104 MICRONS = .004")
WITH STAINLESS STEEL SCREEN INSERT
WITH PVC BALL VALVE ON BOTTOM
RATED TO 100 PSI

AVERAGE 60 GPM FLOW RATE POSSIBLE THROUGH FILTER AT APPROXIMATELY 5 PSI PRESSURE LOSS IF SCREEN FILTER INSERT IS CLEAN. (FOR WATER USE ONLY)

PARTS FOR ABOVE UNITS

STAINLESS STEEL FILTER SCREEN INSERT-140 MESH.....
FILTER INSERT O RINGS.....
FILTER BODY (WHITE).....
CLEAR INSERT COVER.....
INSERT COVER O RING.....

FOR 2" FILTER

GULF SOUTH SUPPLY, INC.
7721 AIRLINE DRIVE
HOUSTON, TEXAS 77037
PHONE (281) 445-8077

GSS-16A
PAGE 1
1102
FAX (281) 445-8557

PRO-900 WATER FILTER



PRO-900 WATER FILTER

PRO-900

MODEL

PRO-900---3/4" NPT IN AND 3/4" NPT OUT IN-LINE FILTER.
BASIC 10" HOUSING WITH PRESSURE RELIEF BUTTON.
USES CARTRIDGES THAT ARE 2-1/2" DIA. X 9-3/4" LONG.
OPERATING PRESSURE RANGE-----25-125 PSI.
OPERATING TEMPERATURE RANGE-----35 F TO 100 F.
OPERATING PH RANGE-----6.5 TO 9.0
ORDER CARTRIDGES SEPARATELY

FILTER CARTRIDGES FOR PRO-900 FILTER



PRO-20



PRO-22



PRO-23



PRO-5

CARTRIDGE #

PRO-20---REDUCES RUST/MEDIUM SEDIMENT---MICRON RATING 20.
FILTER TYPE---PLEATED CELLULOSE PAPER.
MAXIMUM FLOW-----5 GPM.
CAPACITY (GALLONS) -----APPROXIMATELY 15,000.
FILTER LIFE---AVERAGE NORMAL USAGE---3 MONTHS.
SIZE---9-3/4" X 2-1/2"

PRO-22---REDUCES RUST/FINE SEDIMENT---MICRON RATING 5.
FILTER TYPE---STRING WOUND.
MAXIMUM FLOW-----5 GPM.
CAPACITY (GALLONS) -----APPROXIMATELY 15,000.
FILTER LIFE---AVERAGE NORMAL USAGE---3 MONTHS.
SIZE---9-3/4" X 2-1/2"

(MORE FILTER CARTRIDGES FOR PRO-900 FILTER CONTINUED ON NEXT PAGE)

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TEXAS 77037
PHONE 281-445-8077

GSS-16A
PAGE 2
1102
FAX 281-445-8557

(MORE FILTER CARTRIDGES FOR PRO-900 FILTER CONTINUED)

FILTER CARTRIDGES FOR PRO-900 FILTER



PRO-23---REDUCES CHLORINE/RUST/FINE SEDIMENT.

MICRON RATING---2.

FILTER TYPE---CARBON WRAP.

MAXIMUM FLOW-----5 GPM.

CAPACITY (GALLONS) -----APPROXIMATELY 15,000.

FILTER LIFE---AVERAGE NORMAL USUAGE---3 MONTHS.

SIZE-----9-3/4" X 2-1/2"-----

PRO-5---REDUCES CHLORINE/SEDIMENT/LEAD/MERCURY/
ASBESTOS/ATRAZINE/LINDANE/
39 OTHER VOCs/TRIHALOMETHANES (TTHMs)

MICRON RATING-----0.5

FILTER TYPE--HIGH PERFORMANCE CARBON BLOCK.

MAXIMUM FLOW-----0.5 GPM.

CAPACITY (GALLONS) -----APPROXIMATELY 600.

FILTER LIFE---AVERAGE NORMAL USUAGE---3 MONTHS.

SIZE-----9-3/4" X 2-1/2"-----

GULF SOUTH SUPPLY INC
7721 AIRLINE DR.
HOUSTON, TEXAS 77037
PHONE 281-445-8077

GSS-16A
PAGE 3
1102
FAX 281-445-8557

PRO-903 WATER FILTER



PRO-903 WATER FILTER

MODEL

PRO-903---1" NPT IN AND 1" NPT OUT IN-LINE FILTER.
BASIC 10" HOUSING WITH PRESSURE RELIEF BUTTON.
USES CARTRIDGES THAT ARE 4-1/2" DIA. X 9-3/4" LONG.
OPERATING PRESSURE RANGE-----25-125 PSI.
OPERATING TEMPERATURE RANGE-----35 F TO 100 F.
OPERATING PH RANGE-----6.5 TO 9.0
ORDER CARTRIDGES SEPARATELY

FILTER CARTRIDGES FOR PRO-903 FILTER



CARTRIDGE #

PRO-30----REDUCES RUST/MEDIUM SEDIMENT----MICRON RATING 30
FILTER TYPE----PLEATED POLYESTER.
MAXIMUM FLOW-----10 GPM.
CAPACITY (GALLONS)----APPROXIMATELY 15,000.
FILTER LIFE---AVERAGE NORMAL USAGE---3 MONTHS.
SIZE---9-3/4" X 4-1/2"-----

PRO-31----REDUCES RUST/SEDIMENT/CHLORINE---MICRON RATING 2.
FILTER TYPE---PLEATED POLYESTER & CARBON WRAP.
MAXIMUM FLOW-----10 GPM.
CAPACITY (GALLONS)----APPROXIMATELY 15,000.
FILTER LIFE---AVERAGE NORMAL USAGE---3 MONTHS.
SIZE---9-3/4" X 4-1/2"-----