


GULF SOUTH SUPPLY INC.
7721 AIRLINE DR.
HOUSTON, TEXAS 77037
PHONE 281-445-8077

GSS-17D
PAGE 1
1102
FAX 281-445-8557

DELUXE TASTE & ODOR FILTER FOR CITY OR PRIVATE WELL WATER SYSTEMS

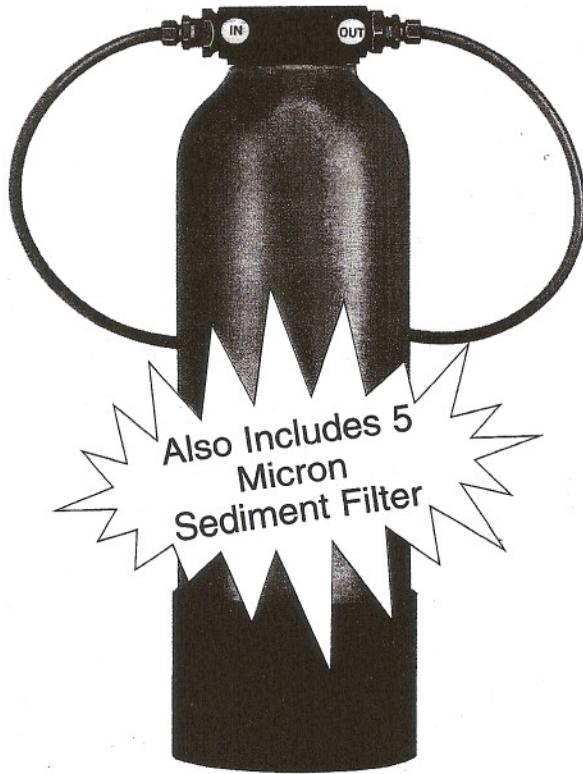

Effectively reduces: bad taste, odors, chlorine, organic chemicals, pesticides and herbicides. For use on private or municipal water systems.

- Simple to install—easily replaces standard cartridge filters.
- Mineral easily replaced, approximately every three years.
- Wastes no water, uses no electricity.
- Compact size (7" W x 20" H) fits conveniently under standard kitchen sink.
- Improves the taste and odor of water and beverages.
- Effectively reduces over 100 EPA priority contaminants.
- Reduces chemicals such as chlorine and municipal treatment chemical by-products.
- Effectively reduces pesticides and herbicides.
- Chemical free filtration—uses granular activated carbon.*

NOTE: Carbon filter mineral must be replaced periodically to ensure filter effectiveness.
Maximum life is 3 years. For your 3 year carbon replacement, order carbon refill kit 136227.


Star Deluxe Undersink Filter Benefits

Unlike the small cartridge type carbon filters which need to be replaced each month, the Star Deluxe Undersink Filter can last up to 3 years under normal conditions before carbon replacement is necessary.

Plus, the Deluxe Undersink Filter allows a normal rate of water flow of approximately three gallons per minute through the faucet. Most cartridge type filters and faucet mount filters restrict water flow to a level that requires considerable time to fill a pan with water. Or, they have no restriction control at all, which means little contact time with carbon and therefore less effective removal of contaminants present in the water. More mineral, more contact time with water, less hassle with changing cartridges every 45 days.

Deluxe Undercounter Taste & Odor Filter


Typical Installation

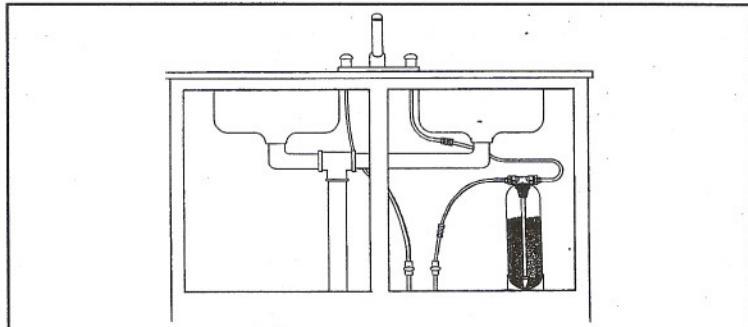


Specifications

Model No.	S07UF06C
Service Flow Rate	3 GPM (11.4 LPM)
Maximum Operating Temperature	100°F (40.8°C)
Maximum Operating Pressure	80 PSI (551.6 KPa)
Minimum Operating Pressure	20 PSI (137.9 KPa)
Plumbing Connections	3/8" O.D. Copper or Plastic
Total Space Required	7" x 20" (17.8cm x 53.4cm)
Approx. Ship Wt.	14 lbs. 6.35 kg

DELUXE TASTE & ODOR FILTER FOR CITY OR PRIVATE WELL WATER SYSTEMS

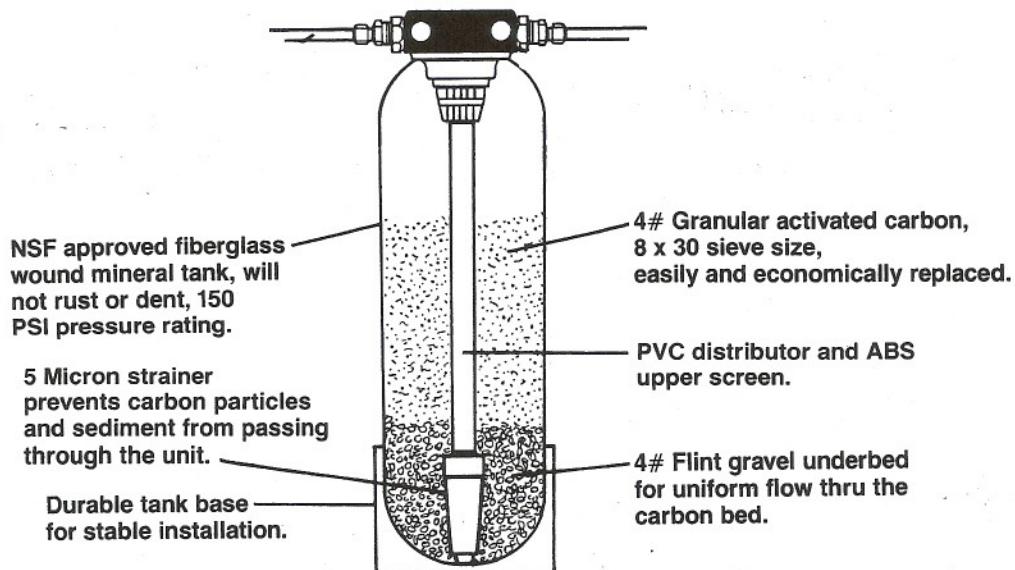

Typical Installation

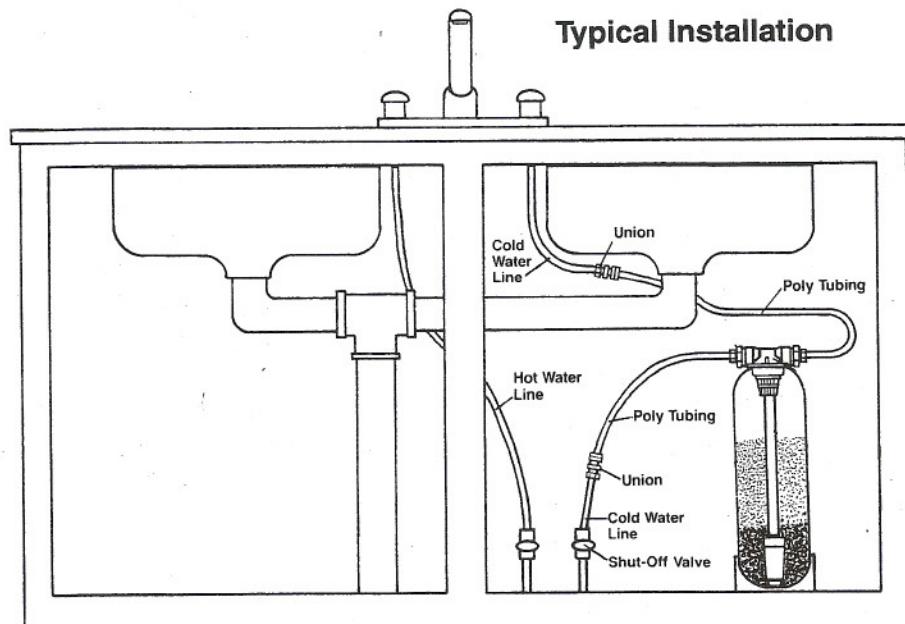

MODEL

SO7UFO6C-----UNDERCOUNTER TASTE & ODOR FILTER-----

(DOES NOT PROMOTE HARMFUL BACTERIA WHEN USED ON WATER
THAT IS MICROBIOLOGICALLY SAFE.)