


COMMERCIAL SELF-PRIMING PUMP



CSP/CCSP SERIES – Especially designed for commercial and public swimming pools and spas, aquatic facilities, water parks and fountain applications where high performance and self-priming are required. Pump has enclosed bronze impeller and standard 4" x 6" A.N.S.I. flange connections. (D.I.N. option available for 50 hz models.) The pump strainer (order separately) has capacity of 1,100 cubic inches. Both pump and strainer can be ordered with optional epoxy coated castings to provide additional performance and corrosion resistance.

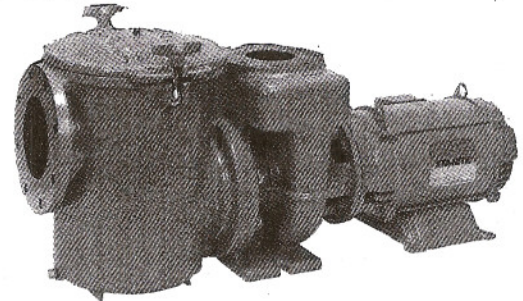

CERTIFICATIONS – CSP/CCSP Series pumps and strainers are certified to meet the requirements of NSF Standard 50.

Page 93

PUMP PERFORMANCE (WITH TRAP INSTALLED)

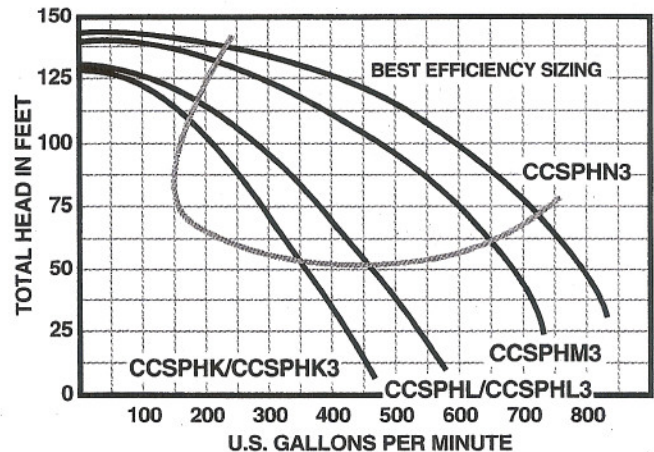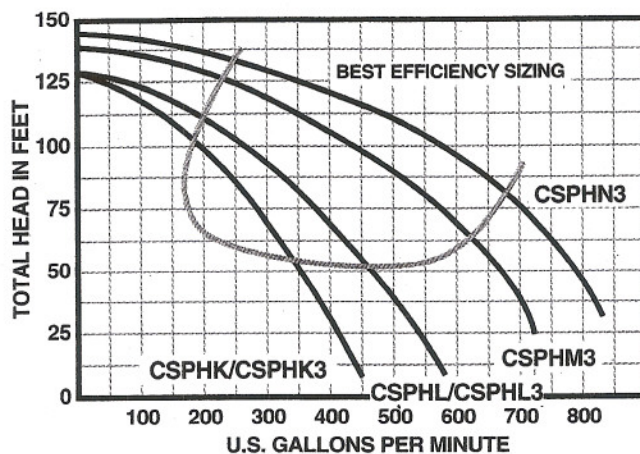

ORDERING INFORMATION

Catalog Number	Catalog Number	Nominal HP (kw)	Phase	Motor Voltage	Full-Load** Amps	Approx. Ship. Weight lbs. (kg) (Pump Only)	Approx. Ship. Vol. Ft ³ (m ³) (Pump Only)
CSPHK	CCSPHK	7-1/2 (5.6)	1	230	39	270 (122)	4.7 (.13)
CSPHK3	CCSPHK3	7-1/2 (5.6)	3	230/460	19.6/9.8	265 (120)	4.4 (.12)
CSPH2K3	CCSPH2K3	7-1/2 (5.6)	3	200	22.1	265 (120)	4.4 (.12)
CSPHL	CCSPHL	10 (7.5)	1	230	46	275 (124)	4.9 (.14)
CSPHL3	CCSPHL3	10 (7.5)	3	230/460	25/12.5	270 (122)	4.7 (.13)
CSPH2L3	CCSPH2L3	10 (7.5)	3	200	28.1	270 (122)	4.7 (.13)
CSPHM3	CCSPHM3	15 (11.2)	3	230/460	40/20	280 (127)	4.9 (.14)
CSPH2M3	CCSPH2M3	15 (11.2)	3	200	42.3	280 (127)	4.9 (.14)
CSPHN3	CCSPHN3	20 (15)	3	230/460	50/25	325 (148)	6.9 (.20)
CSPH2N3	CCSPH2N3	20 (15)	3	200	57.3	350 (159)	7.1 (.21)

OPTIONS: "CCSP" Models feature special epoxy coated castings for maximum performance and corrosion resistance.

60 hz T.E.F.C., 60 hz high efficiency, or 575 volt motors available, consult factory.

NOTE: Maximum ambient temperature for motor is 104°F (40°C).

All pump motors require external overload protection (magnetic starter).

Pump strainer must be ordered separately (see below).

**Amp draw may vary depending on motor manufacturer. Full load amps on motor model plate.


ACCESSORY ORDERING INFORMATION

Catalog Number	Description	Approx. Ship. Weight lbs. (kg)	Approx. Ship. Vol. Ft ³ (m ³)
PKG 184	Strainer for CSP/CCSP, 6" ANSI Flange (1,100 cu. in. capacity)	180 (82)	6.4 (.18)
PKG 184C	Strainer for CSP/CCSP, 6" ANSI Flange (1,100 cu. in. capacity), Epoxy Coated	180 (82)	6.4 (.18)

COMMERCIAL SELF-PRIMING PUMPS

DESIGNED FOR COMMERCIAL POOLS, AQUATIC FACILITIES, WATER PARKS & FOUNTAINS

■ OUTLINE DIMENSIONS

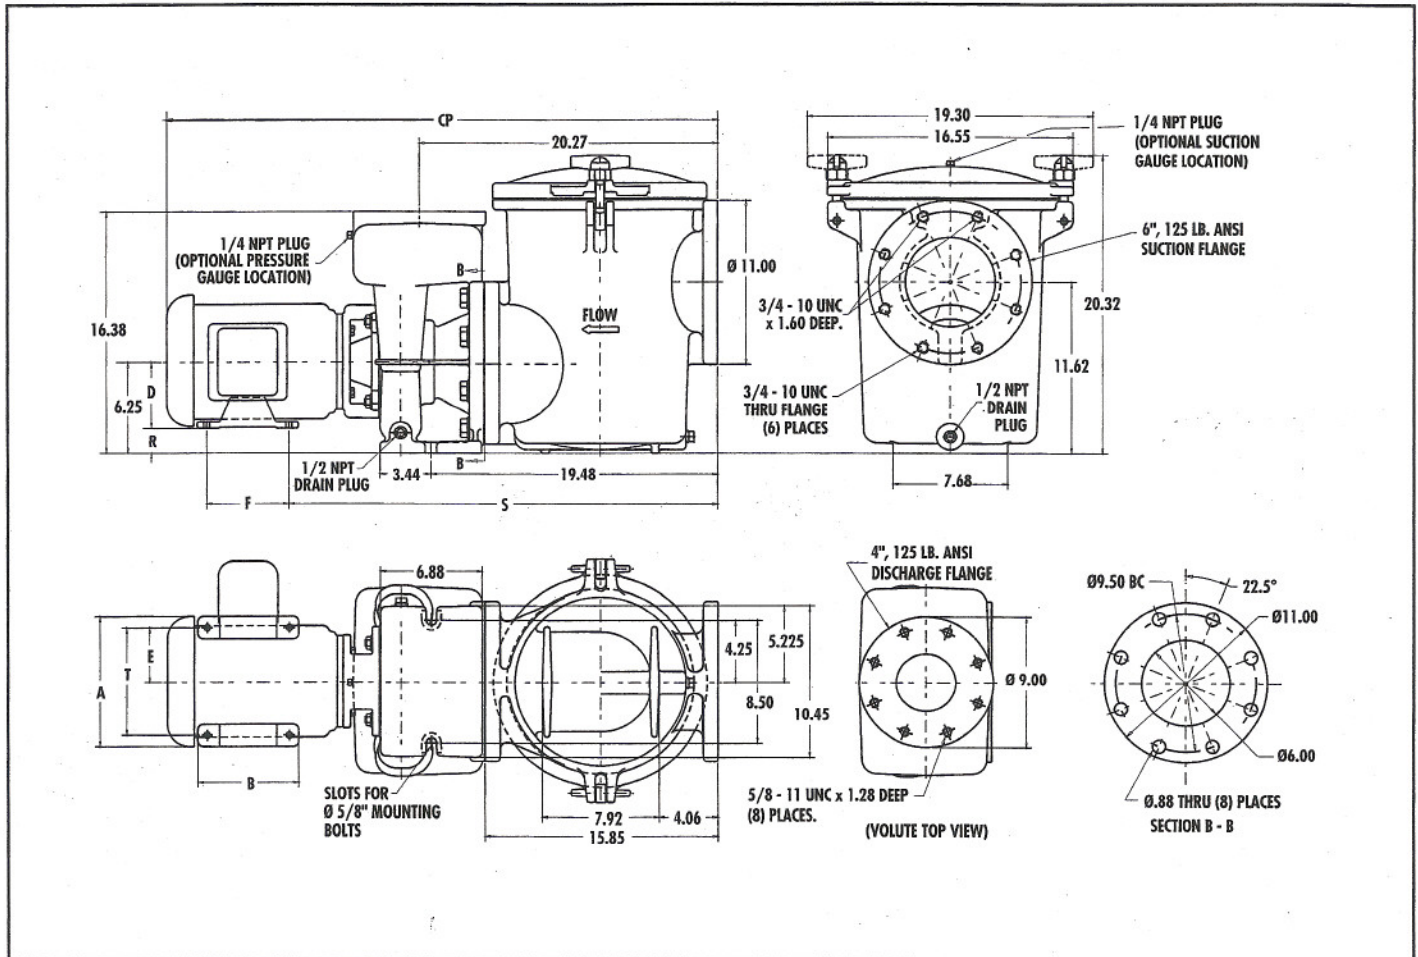

Model Number	A	B	CP	D	E	F	R	S	T
CSPHK, CCSPHK	10.62	7.00	39.44	5.25	4.25	5.50	1.00	30.00	8.50
CSPHK3, CCSPHK3, CSPH2K3	9.00	6.75	40.31	4.50	3.75	5.50	1.75	29.13	7.50
CSPHL, CCSPHL	10.35	8.26	42.69	5.25	4.25	7.00	1.00	30.00	8.50
CSPHL3, CCSPHL3	10.62	7.00	41.00	5.25	4.25	5.50	1.00	30.00	8.50
CSPHM3, CCSPHM3	10.62	8.50	42.50	5.25	4.25	7.00	1.00	30.00	8.50
CSPH2L3, CSPH2M3	10.62	8.50	42.50	5.25	4.25	7.00	1.00	30.00	8.50
CSPHN3, CCSPHN3	12.50	10.80	46.75	6.25	5.00	8.20	0.00	31.62	10.00
CSPH2N3	13.38	12.44	48.50	6.25	5.00	10.00	0.00	31.65	10.00

GULF SOUTH SUPPLY INC

7721 AIRLINE DR.

HOUSTON, TEXAS 77037

PHONE 281-445-8077


CSP

0305

FAX 281-445-8557

COMMERCIAL SELF-PRIMING PUMPS

DESIGNED FOR COMMERCIAL POOLS, AQUATIC FACILITIES, WATER PARKS & FOUNTAINS

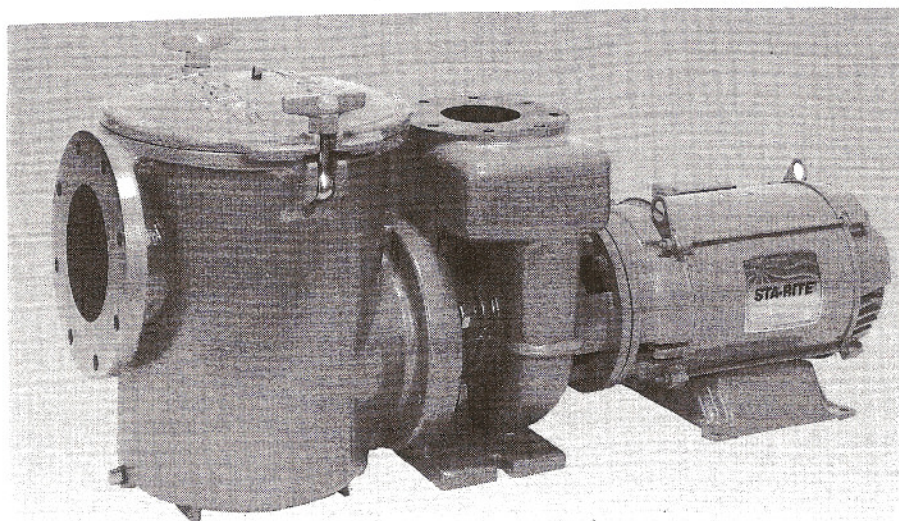

CSP SERIES

"CSP" SERIES SELF PRIMING PUMPS
HEAVY DUTY CAST IRON PUMPS

NET PRICE
(DOES NOT INCLUDE
INCLUDE STRAINER
BASKET)

<u>MODEL</u>	<u>HP</u>	<u>PHASE</u>	<u>VOLTAGE</u>
CSPHK-142-----	7-1/2----	1-----	230-----
CSPHK3-142-----	7-1/2----	3-----	230/460-----
CSPHL-143-----	10-----	1-----	230/460-----
CSPHL3-143-----	10-----	3-----	230/460-----
CSPHM3-144-----	15-----	3-----	230/460-----
CSPHN3-145-----	20-----	3-----	230/460-----

SPECIAL NOTE: ADD THE PRICE OF A PKG.# 184 CAST IRON
STRAINER BASKET IF A STRAINER IS NEEDED
IN THE APPLICATION.

PKG. # 184---1100 CUBIC INCH HAIR & LINT
BASKET STRAINER-----

SPECIAL NOTE: ALL ABOVE PUMP MOTORS ARE NON-OVERLOADING AT
ANY POINT ON THE CURVE. MAXIMUM AMBIENT
TEMPERATURE FOR MOTORS IS 104 F. ALL PUMP
MOTORS ABOVE REQUIRE EXTERNAL OVERLOAD
PROTECTION (MAGNETIC STARTER). PUMP BASKET
STRAINER MUST BE ORDERED SEPARATELY IF NEEDED.

OPTIONS:

1. BRONZE IMPELLER MAY BE ELECTROSTATICALLY COATED FOR
LONGER LASTING LIFE.
2. PUMPS MAY BE ORDERED WITH SPECIAL EPOXY COATED CASTINGS
FOR MAXIMUM PERFORMANCE AND CORROSION RESISTANCE.