


GULF SOUTH SUPPLY INC.
7721 AIRLINE DR.
HOUSTON, TEXAS 77037
PHONE: 281-445-8077
Fax: 281-445-8557
gulfsouthsupply@sbcglobal.net

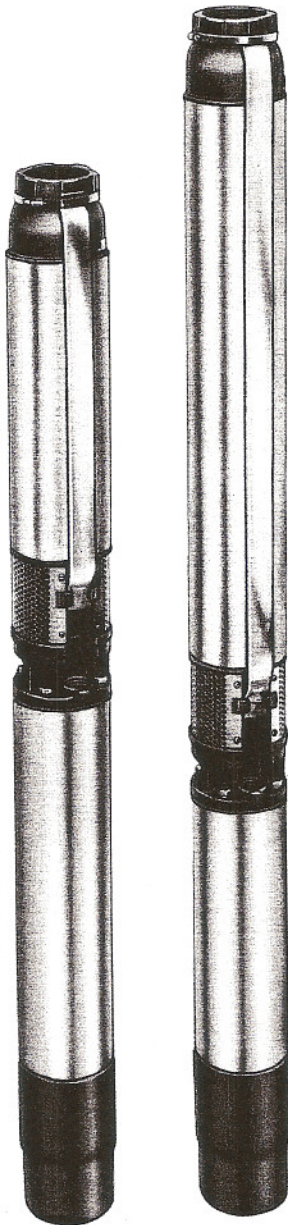

**6" All Stainless Steel
Submersible Pump**

NS



SERIES

NS 80— GPM SERIES
NS 110—GPM SERIES
NS 160—GPM SERIES
NS 240—GPM SERIES
NS 320—GPM SERIES

**STAINLESS
STEEL**


6"

**SUBMERSIBLE PUMPS
FOR WATER WELLS**

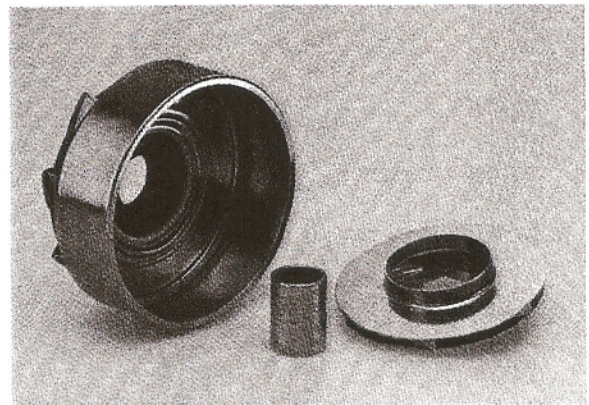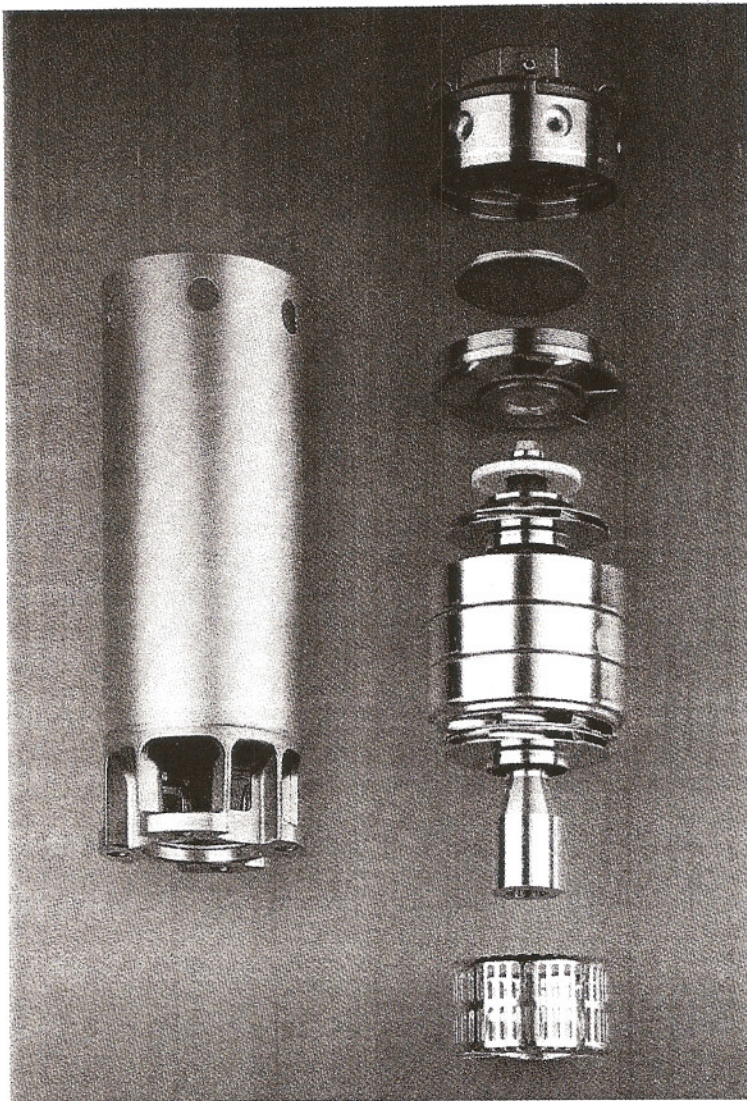


Radial flow stage

Mixed flow stage

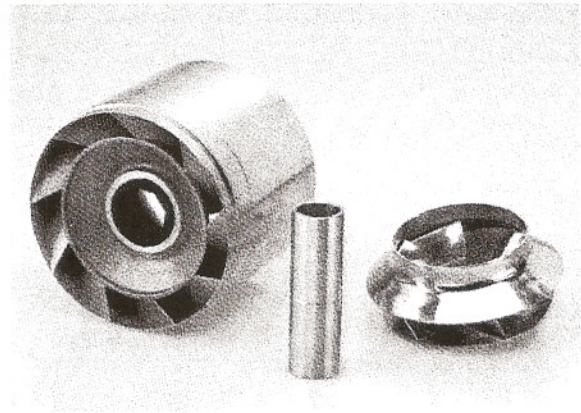

PARTS DESCRIPTION		MATERIAL			
	Type	Standard version		N version	
		AISI	DIN / EN	AISI	DIN / EN
Outer case with motor adapter	Stainless steel	304	1.4301	316	1.4404
Discharge case with built-in check valve	Stainless steel	316	1.4404	316	1.4404
Sealing O-ring	Nitrile rubber (NBR)				
Upper bowl	Stainless steel	316	1.4404	316	1.4404
Upper bearing bush	Nitrile rubber (NBR)				
Upper journal sleeve	Stainless steel w/ceramic coating	329	1.4460	329	1.4460
Pump shaft	Stainless steel	316	1.4401	316	1.4401
Coupling to motor	Stainless steel	316/329	1.4401/1.4460	316/329	1.4401/1.4460
Diffuser	Stainless steel	304	1.4301	316	1.4404
Floating neck ring	Teflon (PTFE)				
Secondary bearing bush	Nitrile rubber (NBR)				
Secondary journal sleeve	Stainless steel	304	1.4301	316	1.4401
Impeller	Stainless steel	304	1.4301	316	1.4404
Cable guard	Stainless steel	316	1.4401	316	1.4401
Suction strainer	Stainless steel	316	1.4401	316	1.4401
Insert locking outer case	Stainless steel	316	1.4401	316	1.4401
Up-thrust washer	Stainless steel	316	1.4401	316	1.4401
Up-thrust disc	Teflon (PTFE)				
Screws and washers	Stainless steel	316	1.4401	316	1.4401

6" ALL STAINLESS STEEL SUBMERSIBLE PUMP ENDS NS -80 SERIES

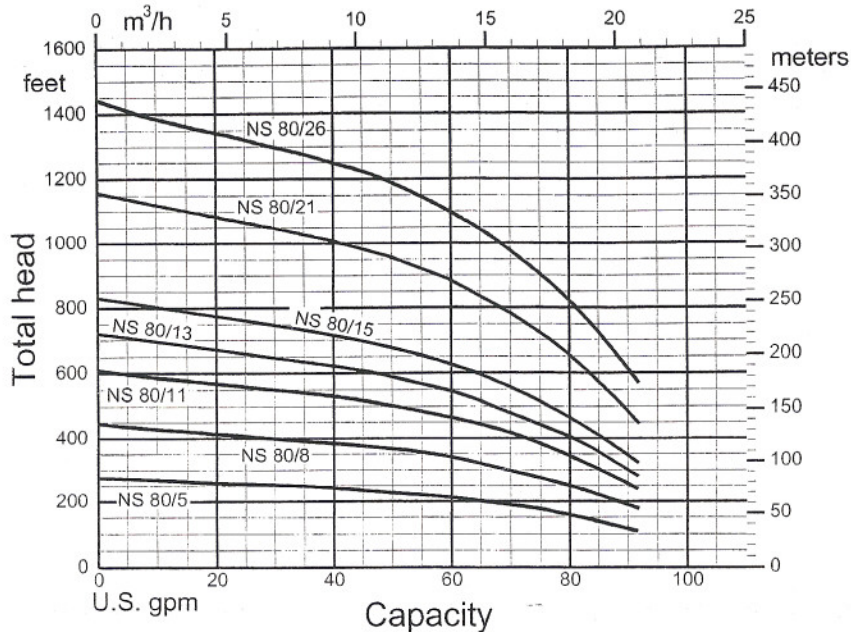


80 GPM STAINLESS STEEL SERIES 3" NPT DISCHARGE

MODEL	RATED HP	STAGES	WEIGHT (LBS)
NS80-5	5	5	28
NS80-8	7.5	8	34
NS80-11	10	11	38
NS80-15	15	15	45
NS80-21	20	21	55
NS80-26	25	26	63

ALL PUMP ENDS ARE DESIGNED FOR 6" DIA. SUBMERSIBLE MOTORS

NOTE: ORDER 6" DIAMETER SUBMERSIBLE MOTORS FOR ABOVE PUMP ENDS SEPARATELY.

6" ALL STAINLESS STEEL SUBMERSIBLE PUMP ENDS NS -110 SERIES

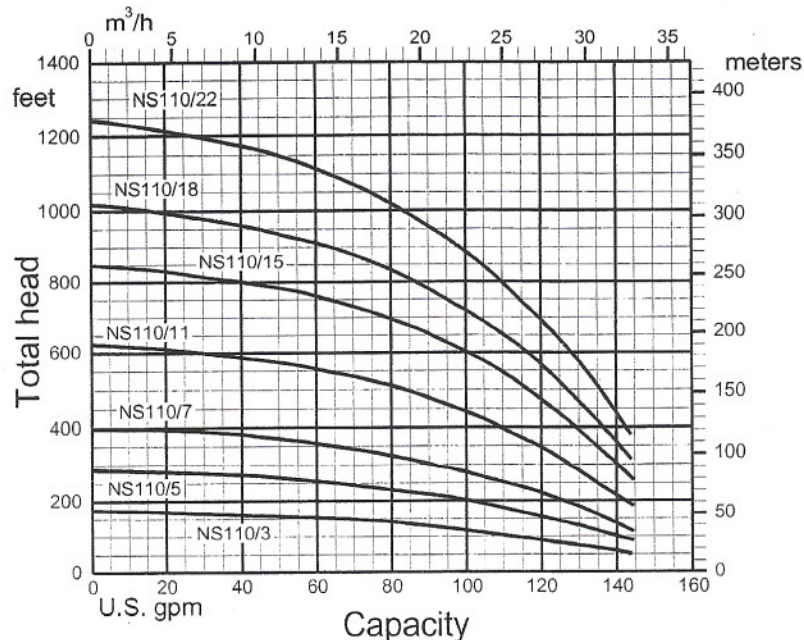


110 GPM STAINLESS STEEL SERIES 3" NPT DISCHARGE

MODEL	RATED HP	STAGES	WEIGHT (LBS)
NS110-3	5	3	25
NS110-5	7.5	5	30
NS110-7	10	7	33
NS110-11	15	11	41
NS110-15	20	15	49
NS110-18	25	18	53
NS110-22	30	22	62

ALL PUMP ENDS ARE DESIGNED FOR 6" DIA. SUBMERSIBLE MOTORS

NOTE: ORDER 6" DIAMETER SUBMERSIBLE MOTORS FOR ABOVE PUMP ENDS SEPARATELY.

6" ALL STAINLESS STEEL SUBMERSIBLE PUMP ENDS NS -160 SERIES

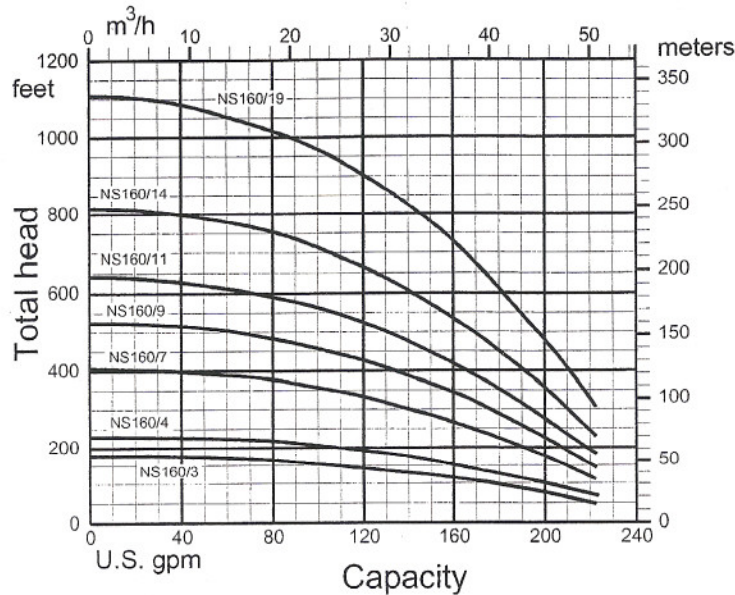


160 GPM STAINLESS STEEL SERIES 3" NPT DISCHARGE

MODEL	RATED HP	STAGES	WEIGHT (LBS)
NS160-3	7.5	3	28
NS160-4	10	4	31
NS160-7	15	7	38
NS160-9	20	9	43
NS160-11	25	11	47
NS160-14	30	14	54
NS160-19	40	19	64

ALL PUMP ENDS ARE DESIGNED FOR 6" DIA. SUBMERSIBLE MOTORS

NOTE: ORDER 6" DIAMETER SUBMERSIBLE MOTORS FOR ABOVE PUMP ENDS SEPARATELY.

6" ALL STAINLESS STEEL SUBMERSIBLE PUMP ENDS NS -240 SERIES

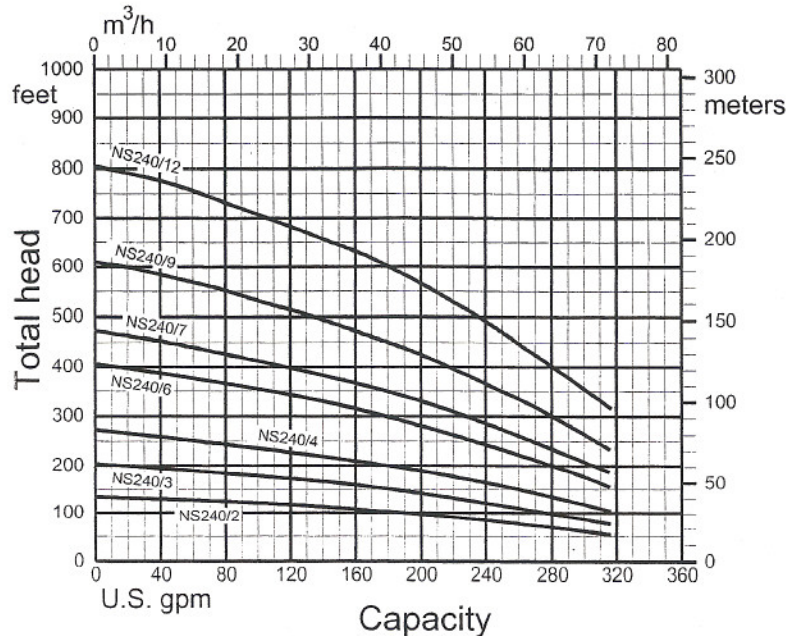


240 GPM STAINLESS STEEL SERIES 4" NPT DISCHARGE

MODEL	RATED HP	STAGES	WEIGHT (LBS)
NS240-2	7.5	2	24
NS240-3	10	3	30
NS240-4	15	4	35
NS240-6	20	6	45
NS240-7	25	7	50
NS240-9	30	9	60
NS240-12	40	12	75

ALL PUMP ENDS ARE DESIGNED FOR 6" DIA. SUBMERSIBLE MOTORS

NOTE: ORDER 6" DIAMETER SUBMERSIBLE MOTORS FOR ABOVE PUMP ENDS SEPARATELY.

6" ALL STAINLESS STEEL SUBMERSIBLE PUMP ENDS

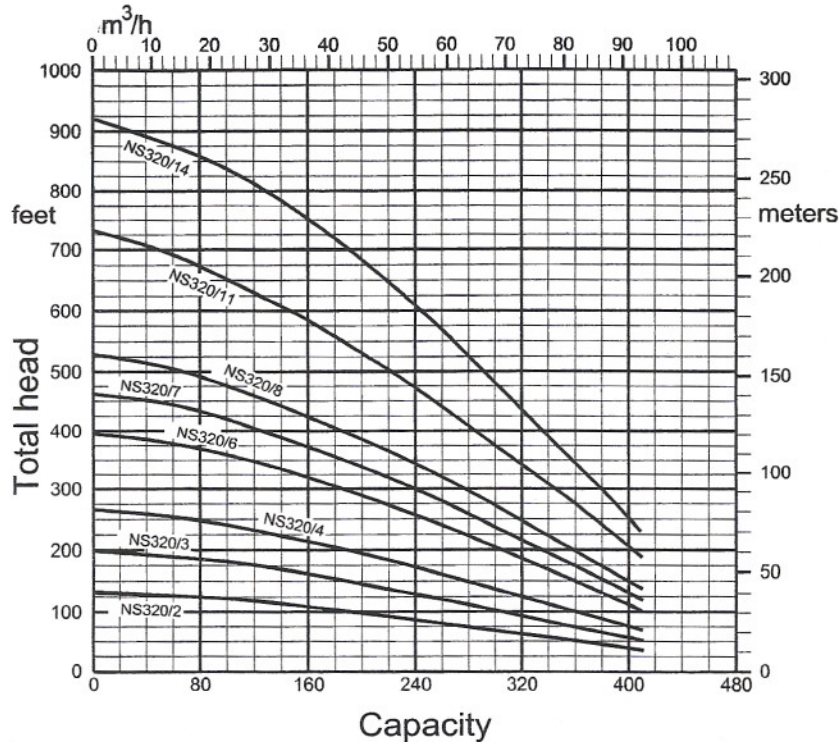

NS - 320 SERIES

320 GPM STAINLESS STEEL SERIES 4" NPT DISCHARGE

MODEL	RATED HP	STAGES	WEIGHT (LBS)
NS320-2	7.5	2	26
NS320-3	10	3	30
NS320-4	15	4	35
NS320-6	20	6	45
NS320-7	25	7	51
NS320-8	30	8	55
NS320-11	40	11	70
NS320-14	50	14	90

ALL PUMP ENDS ARE DESIGNED FOR 6" DIA. SUBMERSIBLE MOTORS

NOTE: ORDER 6" DIAMETER SUBMERSIBLE MOTORS FOR ABOVE
PUMP ENDS SEPARATELY.

GULF SOUTH SUPPLY INC.
7721 AIRLINE DR.
HOUSTON, TEXAS 77037
PHONE: 281-445-8077 FAX: 281-445-8557

GSS-6FM
0207
PAGE 1

6" FRANKLIN SUBMERSIBLE MOTORS

STANDARD WATER WELL VERSION—60HZ

STANDARD DUTY VERSIONS DO NOT INCLUDE SUBTROL SENSOR

<u>HORSEPOWER</u>	<u>PART #</u>	<u>PHASE</u>	<u>VOLTAGE</u>	<u>WEIGHT</u>
5	2261109020	1	230	115
5	2366009020	3	230	110
5	2366109020	3	460	110
7 ½	2261119020	1	230	130
7 ½	2366019020	3	230	115
7 ½	2366119020	3	460	115
10	2261129020	1	230	145
10	2366029020	3	230	120
10	2366129020	3	460	120
15	2261139020	1	230	160
15	2366039020	3	230	135
15	2366139020	3	460	135
20	2366049020	3	230	150
20	2366149020	3	460	150
25	2366059020	3	230	160
25	2366159020	3	460	160
30	2366069020	3	230	180
30	2366169020	3	460	180
40	2367279025	3	230	210
40	2366179025	3	460	210

CONTACT OFFICE FOR INFORMATION ON LARGER MOTORS

6" FRANKLIN CONTROL BOXES

DELUXE BOX INCLUDES MAGNETIC CONTACTOR
SINGLE PHASE230 VOLT

<u>HORSEPOWER</u>	
7 ½	2822019310 230 VOLT DELUXE BOX
10	2822029330 230 VOLT DELUXE BOX
15	2822039621 230 VOLT X-LARGE DELUXE BOX...

6" FRANKLIN SUBMERSIBLE MOTORS ALL 316 STAINLESS STEEL VERSION—60 HZ

316 STAINLESS STEEL CONSTRUCTED MOTORS SPECIALLY CONSTRUCTED FOR CORROSIVE APPLICATIONS, INCLUDING SOME ACIDS, LOW PH AND SEAWATER. THIS STYLE OF MOTOR INCLUDES THE SAND FIGHTER SEALING SYSTEM AND THE SUBTROL HEAT SENSOR IN MOTOR.

SPECIAL NOTICE

DELIVERY MAY RUN FROM 2 TO 6 WEEKS NORMALLY
CALL OFFICE TO CHECK AVAILABILITY

<u>HORSEPOWER</u>	<u>PHASE</u>	<u>STYLE</u>	<u>VOLTAGE</u>
5	3	316 SS	230 OR 460
7 ½	3	316 SS	230 OR 460
10	3	316 SS	230 OR 460
15	3	316 SS	230 OR 460
20	3	316 SS	230 OR 460
25	3	316 SS	230 OR 460
30	3	316 SS	230 OR 460
40	3	316 SS	460
50	3	HI-TEMP 316 SS	460
60	3	HI-TEMP 316 SS	460

SPECIFY MOTOR VOLTAGE WHEN ORDERING THE MOTOR

FURTHER MOTOR UPGRADES MAY BE AVAILABLE UPON REQUEST

6" FRANKLIN SUBMERSIBLE MOTOR LEADS

DESCRIPTION

3 WIRE LEAD ASSEMBLY 150" LONG # 10 SIZE CABLE

3 WIRE LEAD ASSEMBLY 150" LONG # 8 SIZE CABLE